

EELECTA® KNX MINIPAD

MB40BxxKNX **MB80AxxKNX**
MB40CxxKNX **MB80CxxKNX**

Product and Applications description

Eelecta® Minipad pushbutton range of KNX devices is divided in 4 different models based on the number of switch, input and temperature sensors provided with the device.

Scheme Eelecta® pushbutton range:

Code	Switch	Inputs	Temp. Sensor
MB40BxxKNX	4	-	No
MB40CxxKNX	4	4	Yes
MB80AxxKNX	8	-	Yes
MB80CxxKNX	8	-	Yes+Circ.Func.

Product has 4 (8) push buttons which can be configured to manage lights, dimmers, shutters, etc; and 4 inputs (where present) on the backside to interface free potential contacts (for example sensors, traditional buttons, etc.)

It has 5 white led in the front side, each led freely configurable by ets and 2 versions have a temperature sensor included which can be configured as a room thermostat.

The device is equipped with appropriate communication interface with the bus type TP1 (twisted pair) KNX European standard, according CEI EN 50090.

Application Program

Downloadable from eelectron website (www.eelectron.com)

Maximum number of group addresses: **44**
 This is the maximum number of different group addresses the device is able to memorize.

Maximum number of associations: **69**
 This is the maximum number of associations between communication objects and group addresses the device is able to memorize.

Technical data

Power Supply:
 Via bus EIB/KNX cable

- Voltage 21..30V DC
- Current Consumption EIB/KNX < 10mA

Inputs / buttons

- Switches : 4 (8 on PB80AxxKNX and PB80BxxKNX)
- Inputs : 4 inputs for free potential contacts (on PB40CxxKNX and PB80BxxKNX)

Note: 4 inputs for free potential contacts must be connected to dry contacts only, in particular they can be connected to the conventional switch code **PB40AxxCON**

- Maximum Cable Length : ≤ 10m
- Voltage Scanning: 3,3 V dc
- Current Scanning: ≤ 1 mA

Output

- Number: 5 white leds

Control Elements


- EIB/KNX led and button for physical address programming

Connections

- EIB/KNX 2 Terminals for connections bus with 0,8mmØ
- Input 4 connector cable to be wired with 24 AWG (where present)

Mechanical Data

- Case: polycarbonate and ABS
- Protection class: II in accordance with EN 61140
- Weight: approx. 130 g

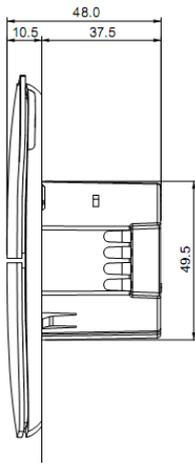

Electrical safety

- Degree of pollution (IEC 60664-1): 2
- Degree of protection (EN 60529): IP 20
- Protection class (according to IEC 1140): III
- Overvoltage class (according to IEC 664-1): III
- Bus: safety voltage SELV DC 29 V
- Meets EN 50090 and IEC 664-1: 1992

EMC Requirements

Compliant to EN 50081-1, EN 50082-2 and EN 50491


Terms of use

- According to EN 50090-2-3
- Ambient temperature during operation: 0 °C +4 5 °C
- Storage temperature: - 20 °C + 55 °C
- Relative humidity: max 90% (not condensing)


Certification
 EIB/KNX certificate

Indicators Position and Control Elements

Switch and led position for MB80AxxKNX and MB80CxxKNX


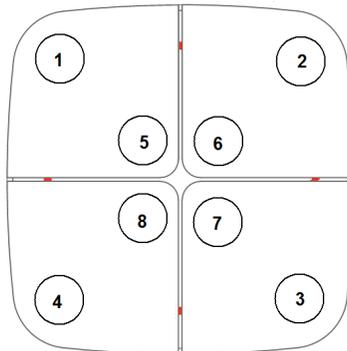


Switch and led position for MB40BxxKNX and MB40CxxKNX

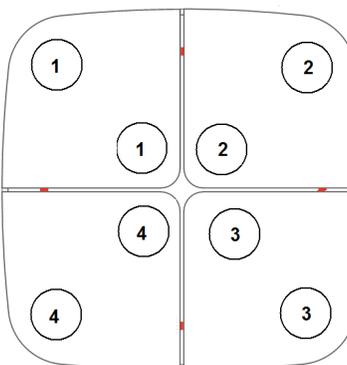

Input position for MB40CxxKNX

- Inputs:
1. Input N° 4
 2. Common
 3. Input N° 3
 4. Common
 5. Common
 6. Input N° 2
 7. Common
 8. Input N° 1

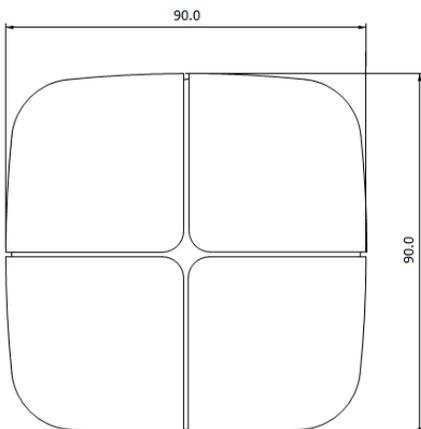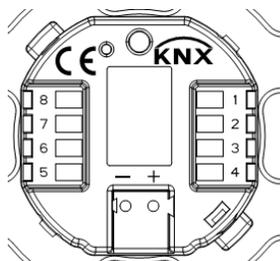

Installation Instructions

The device may be used for permanent indoor installations in dry locations within wall box mounts.

WARNING

- The device must not be connected to 230V cables
- The prevailing safety rules must be heeded.
- The device must be mounted and commissioned by an authorised installer.
- The device must not be opened. Any faulty devices should be returned to manufacturer.
- For planning and construction of electric installations, the relevant guidelines, regulations and standards of the respective country are to be considered.

Mounting and Wiring hints




General Description

The device configuration is done by pressing the programming push button located in the back side of the housing. Please take care during installation to leave connection wires long enough in order to remove the device easily from the wall box for commissioning.


Connecting bus cables

- Connect each single KNX/EIB bus core inside the terminal block observing bus polarity .
- Slip the bus connection block into the guide slot placed on the back side of this device and press the block down to the stop.

Instructions to remove the buttons

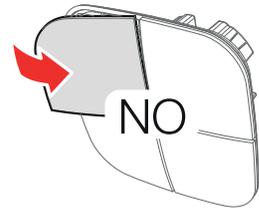

WARNING: Remove the buttons from the corner pulling toward the center
ATTENZIONE: Togliere i tasti tirando dall'angolo verso il centro

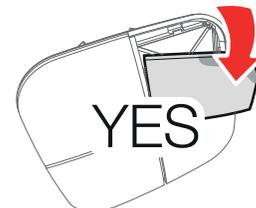

Disposal

The crossed-out bin symbol on the equipment or packaging means the product must not be included with other general waste at the end of its working life. The user must take the worn product to a sorted waste centre, or return it to the retailer when purchasing a new one. An efficient sorted waste collection for the environmentally friendly disposal of the used device, or its subsequent recycling, helps avoid the potential negative effects on the environment and people's health, and encourages the re-use and/or recycling of the construction materials.



Eelectron spa
 Via Monteverdi 6
 I-20025 Legnano (MI) - Italia
 Tel: +39 0331 500802
 Email: info@eelectron.com Web: www.eelectron.com



MINIPAD KNX EELECTA®

MB40BxxKNX MB80AxxKNX
MB40CxxKNX MB80CxxKNX

Descrizione del prodotto e suo funzionamento

La serie di pulsantieri KNX Eelecta® è composta da 4 modelli in base al numero di pulsanti disponibili, alla presenza degli ingressi sulla parte posteriore e alla presenza del sensore di temperatura. Schema della gamma di pulsantieri Eelecta®:

Codice	Pulsanti	Ingressi	Sensore temp.
MB40BxxKNX	4	-	NO
MB40CxxKNX	4	4	SI
MB80AxxKNX	8	-	SI
MB80BxxKNX	8	-	SI+FUNZ.CIRC.

Il prodotto è dotato di 4 (8) pulsanti che possono essere configurati per la gestione di luci, tapparelle, dimmer, etc., oltre a 4 ingressi (nelle versioni che lo prevedono) posti nella parte posteriore e dedicati all'interfacciamento di contatti liberi da potenziale (puliti - per esempio sensori, pulsanti tradizionali, etc.)

Sono inoltre presenti 5 led bianchi, ciascuno liberamente configurabile con ets. Due versioni includono un sensore di temperatura che può anche essere configurato come termostato.

Il dispositivo è dotato di opportuna interfaccia di comunicazione con il bus tipo TP1 (coppia intrecciata) a standard europeo KNX conforme alle normative di settore CEI EN 50090.

Programma applicativo

Scaricabile dal sito eelectron (www.eelectron.com)

Numero massimo indirizzi di gruppo: **44**
 Corrisponde al numero massimo di indirizzi di gruppo diversi che il dispositivo è in grado di memorizzare.

Numero massimo associazioni: **69**
 Corrisponde al numero massimo di associazioni tra oggetti di comunicazione e indirizzi di gruppo che il dispositivo può memorizzare.

Dati tecnici

Alimentazione

Attraverso il cavo EIB/KNX

- Tensione: 21...30V DC
- Corrente assorbita EIB/KNX: < 10mA

Ingressi

- Pulsanti: 4 (8 per PB80AxxKNX and PB80BxxKNX)
- Ingressi: 4 per contatti liberi da potenziale (per PB40CxxKNX e PB80BxxKNX)

Note: i 4 ingressi per contatti liberi da potenziale devono essere connessi esclusivamente a contatti "puliti", in particolare possono essere connessi alla pulsantiera convenzionale cod. **PB40AxxCON**

- Massima lunghezza cavi: ≤ 10m
- Tensione di scansione: 3,3 V dc
- Corrente di scansione: ≤ 1 mA

Uscite

- Numero: 5 led bianchi

Elementi di comando


- LED rosso e pulsante EIB/KNX per la programmazione dell'indirizzo fisico

Collegamenti

- EIB/KNX 2 Terminali di connessione bus da 0,8mmØ
- Ingressi 4 connettore cablato con cavo da 24 AWG (nei modelli dove sono presenti gli ingressi)

Dati meccanici

- Custodia: in policarbonato e ABS
- Classe di protezione: Il secondo la EN 61140
- Peso: ca. 130 g.

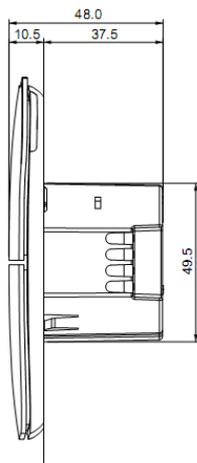

Sicurezza elettrica

- Grado di inquinamento (secondo IEC 60664-1): 2
- Grado di protezione (secondo EN 60529): IP 20
- Classe di protezione (secondo IEC 1140): III
- Classe di sovratensione (secondo IEC 664-1): III
- Bus: tensione di sicurezza SELV DC 29 V
- Soddisfa EN 50090 e IEC 664-1: 1992

Requisiti EMC

Rispettati EN 50081-1, EN 50082-2 e EN 50491

Condizioni di impiego


- Secondo norma EN 50090-2-3
- Temperatura ambiente durante il funzionamento: 0°C + 45°C
- Temperatura di stoccaggio: - 20 + 55 °C
- Umidità relativa: max 90 %

Omologazione


Omologato EIB/KNX

Posizione indicatori ed elementi di comando

Pulsanti e led per versioni MB80AxxKNX e MB80CxxKNX

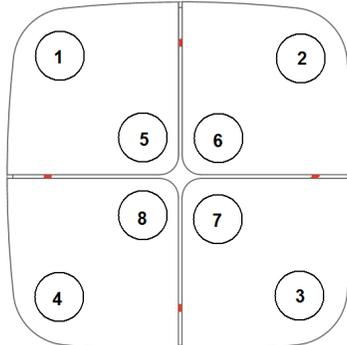



Pulsanti e led per versioni MB40BxxKNX e MB40CxxKNX

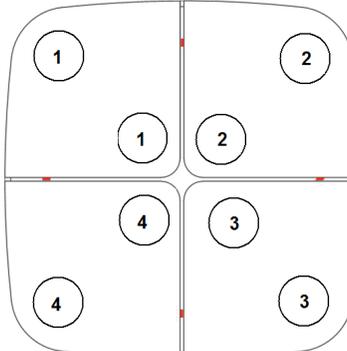

Posizione ingressi per versioni MB40CxxKNX

Ingressi:

- Ingresso N° 4
- Comune
- Ingresso N° 3
- Comune
- Comune
- Ingresso N° 2
- Comune
- Ingresso N° 1

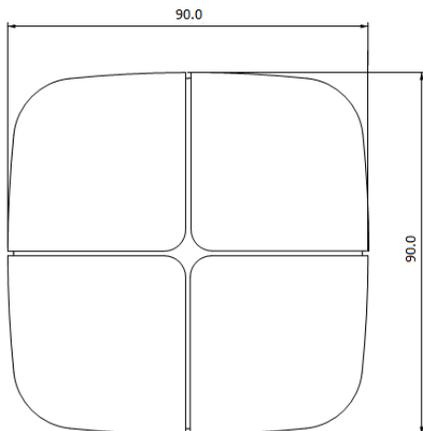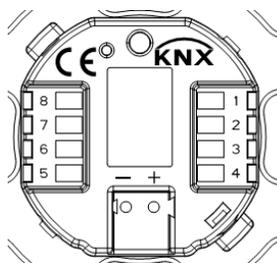

Avvertenze per l'installazione

L'apparecchio deve essere impiegato per installazione in ambienti chiusi e asciutti.

IMPORTANTE

- L'apparecchio non deve essere connesso per nessun motivo alla tensione si rete (230V)!
- L'apparecchio deve essere installato e messo in servizio da un installatore abilitato.
- Devono essere osservate le norme in vigore in materia di sicurezza e prevenzione antinfortunistica.
- L'apparecchio non deve essere aperto. Eventuali apparecchi difettosi devono essere fatti pervenire alla sede competente.

Montaggio e collegamento



Descrizione generale

Per effettuare la messa in servizio occorre poter accedere al tasto "KNX/EIB" per la commutazione tra modo normale e modo programmazione.

Collegamento del modulo alla linea bus

- Inserire il morsetto Bus EIB, precedentemente collegato al cavo bus, nel connettore maschio che si trova sul retro del dispositivo, fino all'arresto
- Il morsetto Bus EIB (compreso nella fornitura) è adatto ad un conduttore unifilare con \varnothing 0.8 mm

Istruzioni per rimuovere i pulsanti

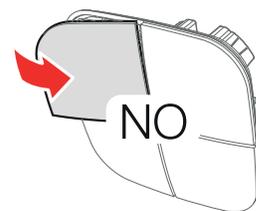

WARNING: Remove the buttons from the corner pulling toward the center
ATTENZIONE: Togliere i tasti tirando dall'angolo verso il centro



Smaltimento

Il simbolo del cassonetto barrato indica che il prodotto alla fine della propria vita utile deve essere raccolto separatamente dagli altri rifiuti. Al termine dell'utilizzo, l'utente dovrà farsi carico di conferire il prodotto ad un idoneo centro di raccolta differenziata oppure di riconsegnarlo al rivenditore all'atto dell'acquisto di un nuovo prodotto. L'adeguata raccolta differenziata per l'avvio successivo dell'apparecchiatura dimessa al riciclaggio contribuisce ad evitare possibili effetti negativi sull'ambiente e sulla salute e favorisce il reimpiego e/o riciclo dei materiali di cui è composta l'apparecchiatura.



Eelectron spa
 Via Monteverdi 6
 I-20025 Legnano (MI) - Italia
 Tel: +39 0331 500802
 Email: info@eelectron.com Web: www.eelectron.com

