



Configurations schema Eelecta | Z-Wave Plus



EELECTRON S.P.A. - Via Claudio Monteverdi, 6
20025 Legnano (MI) Italia - Tel. +39 0331 500802

Drive an external relay via an Eelecta Homepad

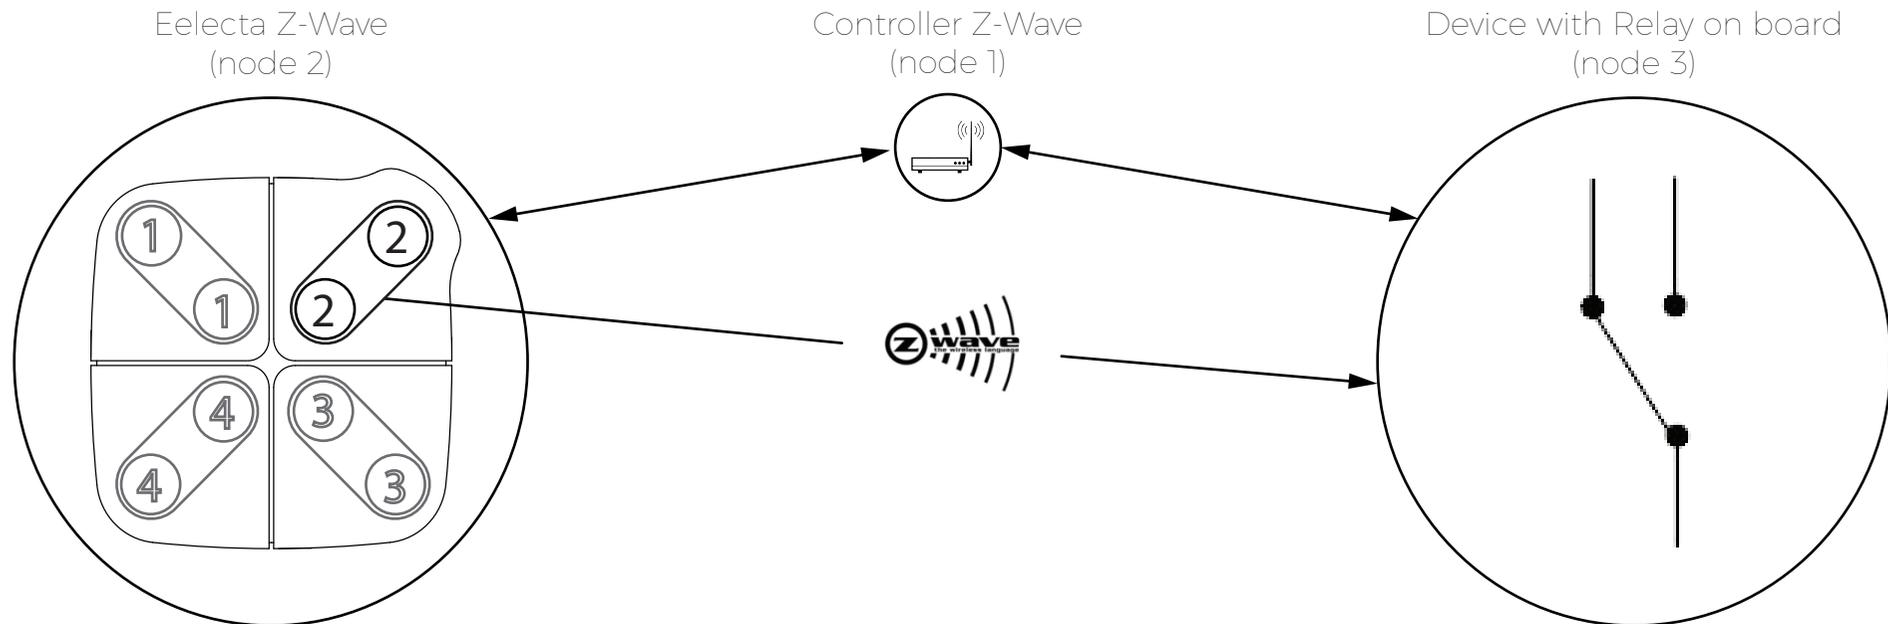


Eelecta setting (node 2)

Parameter: 5 | value: 2 - The LED associated with the external load will switch following the load status.

Group 1 LifeLine | value: 1, 3

Group 3 On/Off control (button 2) | value: 3

A button of the Eelecta Homepad device and a button of an external device control the on board relay of the Eelecta device

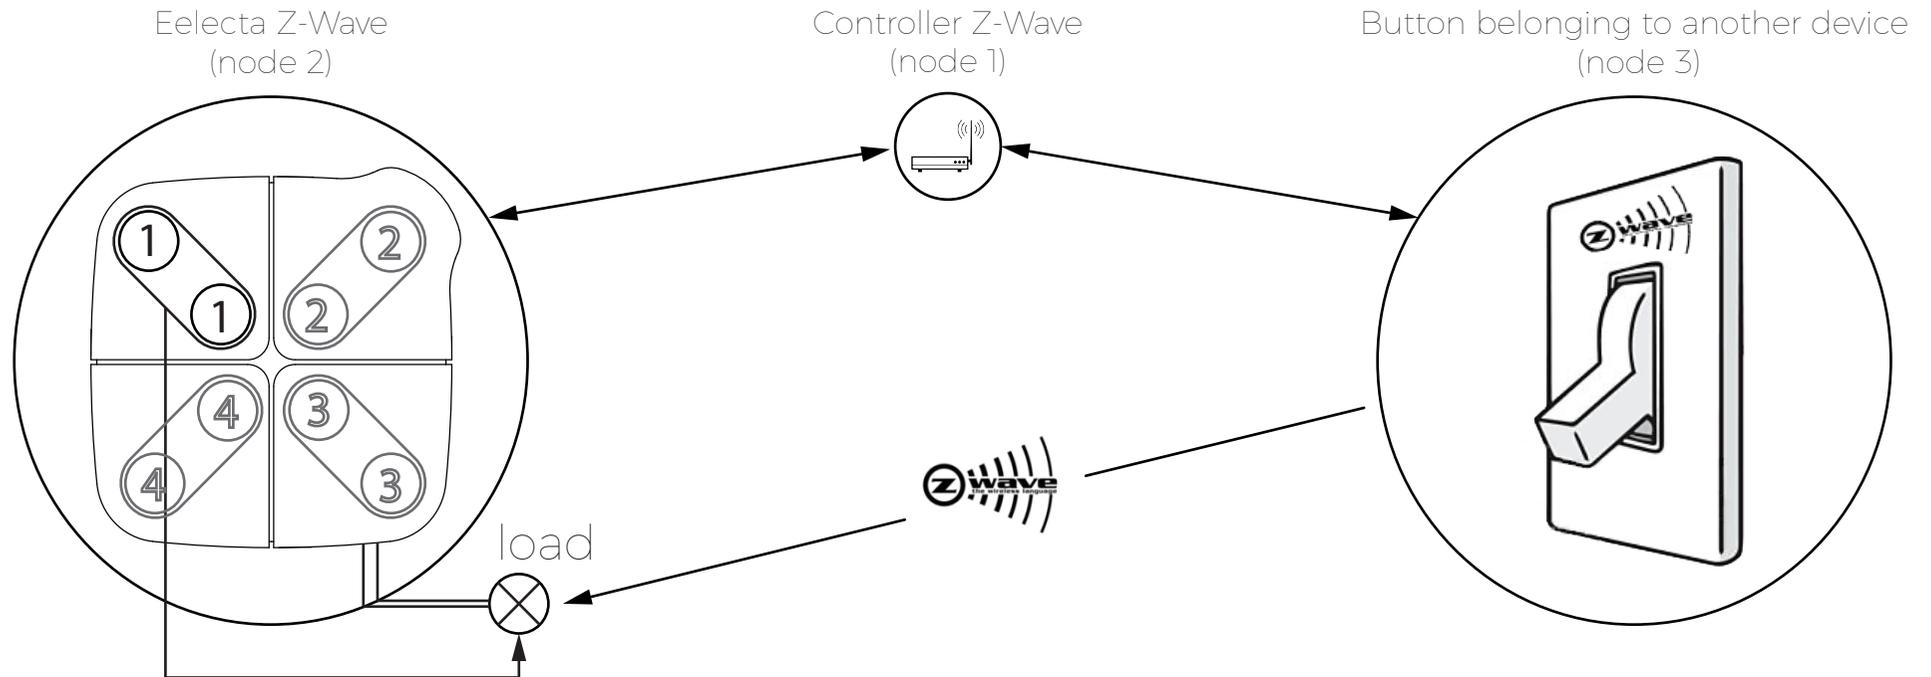


Eelecta setting (node 2)

Parameter: 1 | value: 1 - Eelecta button 1 switches the on board relay.

Parameter: 5 | value: 4+1 - The LED associated with the local load will switch following the status.

Group 1 LifeLine | value: 1, 3

An Eelecta Homepad drives its own relay with a button; The same relay is controlled by a button of another Eelecta Homepad

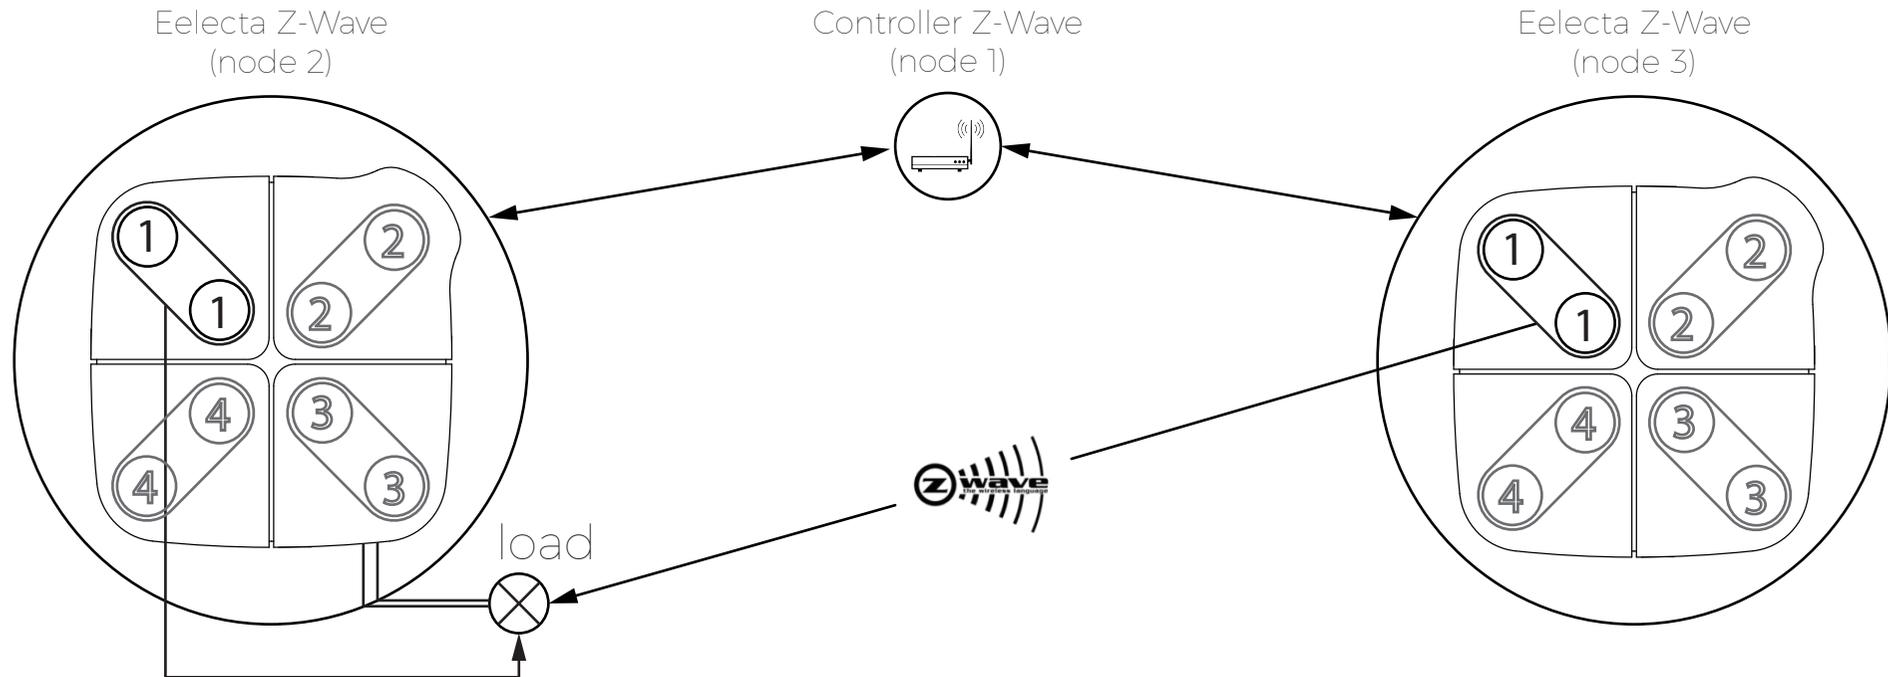

Eelecta setting (nodo 2)

Parameter: 1 | value: 1 - Eelecta button 1 switches the on board relay.

Parameter: 5 | value: 4+1 - The LED associated with the local load will switch following the status.

Group 1 LifeLine | value: 1, 3

Eelecta setting (nodo 3)

Parameter: 1 | value: 0 - Eelecta button 1 NOT switches the on board relay.

Parameter: 5 | value: 2 - The LED associated with the external load will switch following the load status.

Group 1 LifeLine | value: 1, 2

Group 2 On/Off control (button 1) | value: 2

The Eelecta Homepad devices drive an external relay



Eelecta setting (node 2)

Parameter: 1 | Value: 0 - Eelecta pad 1 NOT switches the on board relay.

Parameter: 5 | value: 2 - The LED associated with the external load will switch following the load status.

Group 1 LifeLine | valore: 1, 3, 4

Group 2 On/Off control (button 1) | value: 4

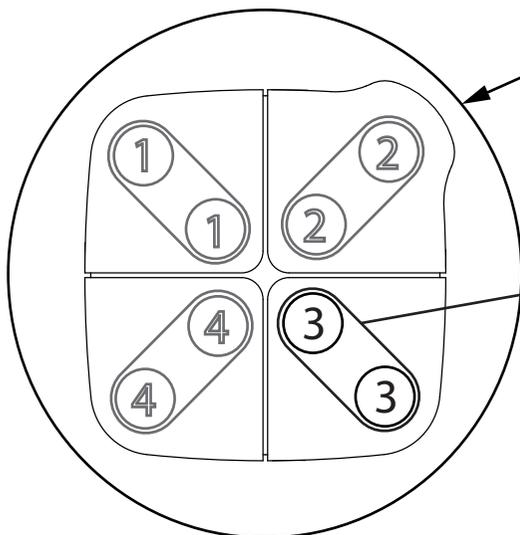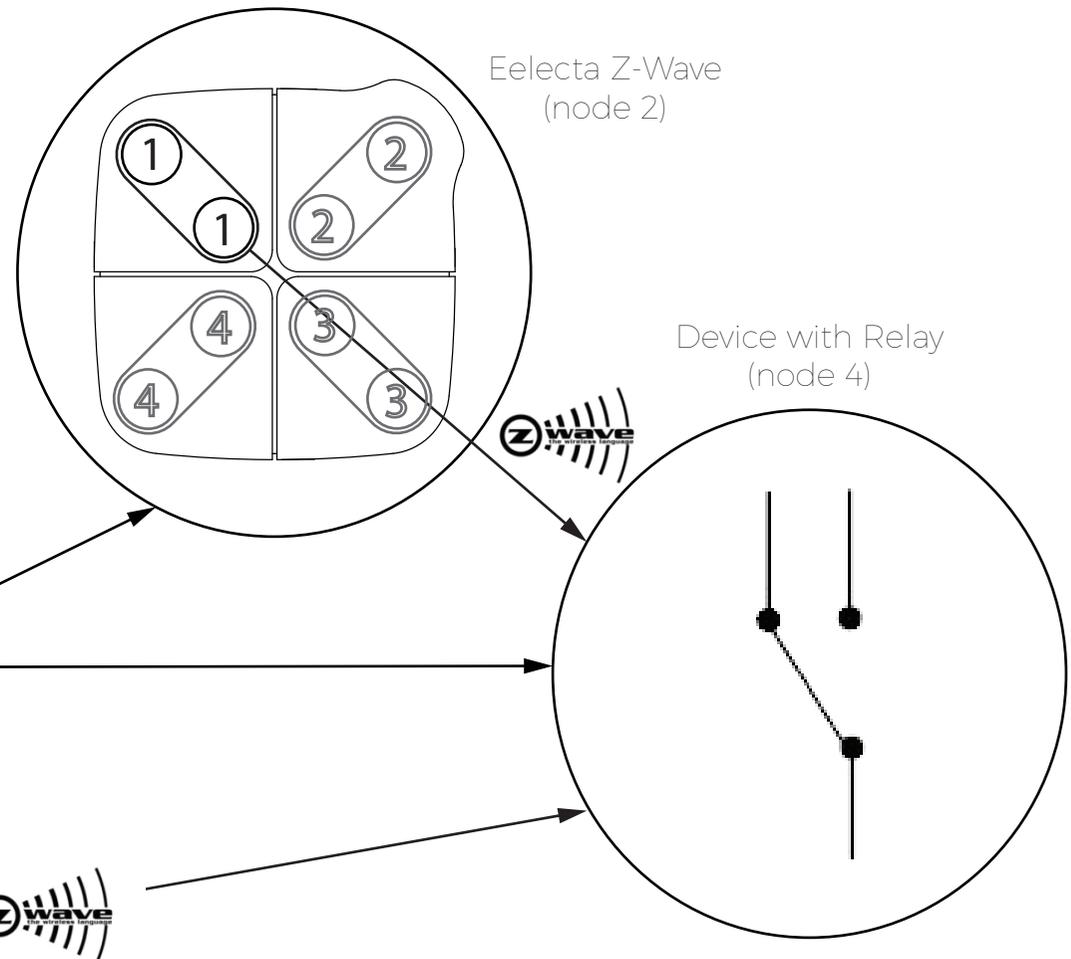

Eelecta Z-Wave (nodo 3)

Eelecta setting (node 3)

Parameter: 5 | value: 2 - The LED associated with the external load will switch following the load status.

Group 1 LifeLine | value: 1, 2, 4

Group 4 On/Off control (button 3) | value: 4