

# eeelectron®

Building & home evolution



ITALIAN DESIGN

PRODUCTS CATALOGUE



Eelectron designs and manufactures electronic devices in Italy with applications based on KNX®, Bluetooth®, DALI-2® standards and software solutions for the end user.

Eelectron's philosophy is aimed at combining aspects of **design and functional** and performance **research** through highly innovative devices, interoperable on international standards and connected to the cloud.

The **constantly evolving** product portfolio is outlined around the building modernization process, focusing on connected room automation, **Building Evolution**, **hotel automation** and **smart homes**.


Particular attention is paid to the **reliability of products** and to today's **emerging applications**, for the **benefit of occupants** and managers.

In fact, Eelectron's experience is dedicated to the **well-being of people** in buildings and is aimed at those who design, install or manage them in the most sustainable, energy efficient, comfortable and healthy ways.

**Pre and post-sales assistance** and regular **training** activities are the foundation of a philosophy that places customers and the market at the centre.


Compliance with the strictest **international quality standards** completes Eelectron's vision, which leads the market following its roots and mission: to technologically innovate products, applications and services.

The catalog is constantly updated, we invite you to subscribe to the eelectron newsletter, by visiting the website [www.eelectron.com](http://www.eelectron.com), and follow our social networks.

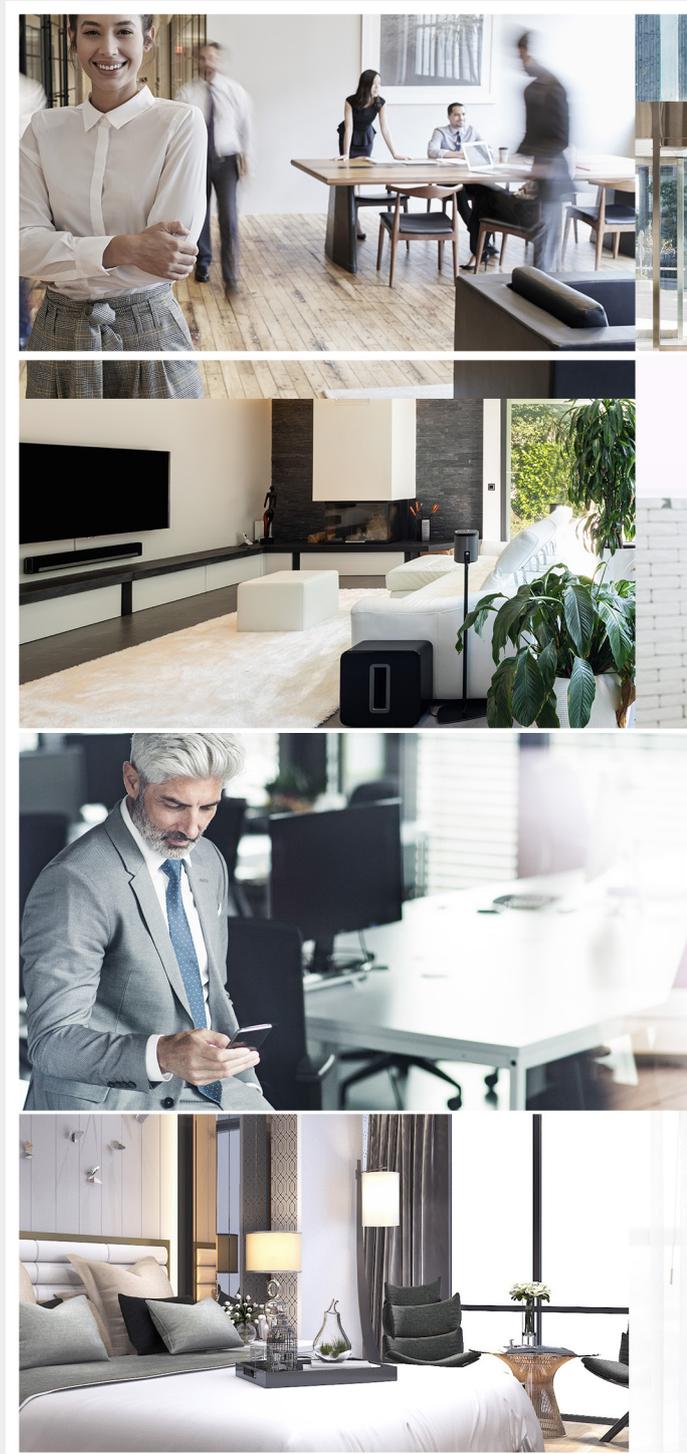

Eelectron SpA is a Training Center certificated by KNX Association: basic, advanced and HVAC courses.



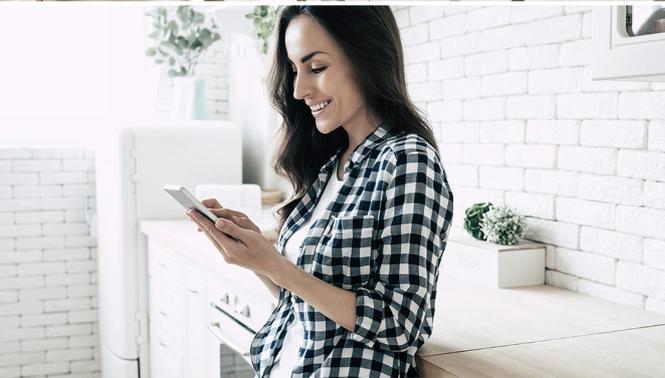

Since its founding in 1994, Eelectron has invested to offer the best technology in building applications:

A shareholder of **KNX Association** ([www.knx.org](http://www.knx.org)) since 2005:

EIB/KNX is the **interoperable global standard** in the management sector in intelligent, sustainable and healthy buildings, the expression of 500 leading constructors in the sector and with more than 12 million nodes installed worldwide in renovation, extension and new construction projects.

KNX promotes **long-term investment protection** by combining comfort, energy saving, facilitating planning and maintenance with constantly evolving technology: since 2018 it includes the “Secure” standard for security in “building automation” and for the IOT.

Eelectron, as an official **KNX Training Center**, has always disseminated the implementation of good programming guidelines and recommendations for “Secure” aspects.

The portfolio is oriented to “vertical markets”: **tertiary, hospitality, residential, healthcare** proposing specific applications and integrating standard, reliable and safe technologies.

Eelectron products use and interact with **Bluetooth technology** ([www.bluetooth.org](http://www.bluetooth.org)), both for **wired/wireless** configurations and connected applications such as mobile App and cloud.

The interoperability of KNX promoted by Eelectron is aimed at proposing integrated solutions with other standards, such as recently updated **DALI-2** for modern lighting control ([www.dali-alliance.org](http://www.dali-alliance.org)), or other protocols to meet needs oriented to different market sectors.

Eelectron is a member and active in the aforementioned associations.



---

## INDEX

9025

6

SYNCHRONICITY

38

eSUITE

40

3025

42

TOUCH PANEL

44

MINIPAD

48

HORIZONE

50

ACTUATORS

56

# Design Controls

Research, development, design, production. Made in Italy

## 9025

evolving skills

9025 KNX is a set of touch switches, a range dedicated to temperature management, and a technological system to control smart buildings.

DESIGN PLUS  
powered by light+building



## 3025

Warmth, in your place

55x55, 4 Controls, different Materials. Integrated thermostat detecting and regulating a desired temperature. Materials, functionalities, finishing are essential values for your environment project.



## eelecta

You, in an horny and environmental world


A product range dedicated to democratic, smart and creative design.

To the interaction between users and lighting control, energy saving, temperature control, entertainment.

DESIGN PLUS  
powered by light+building



reddot design award  
winner 2012

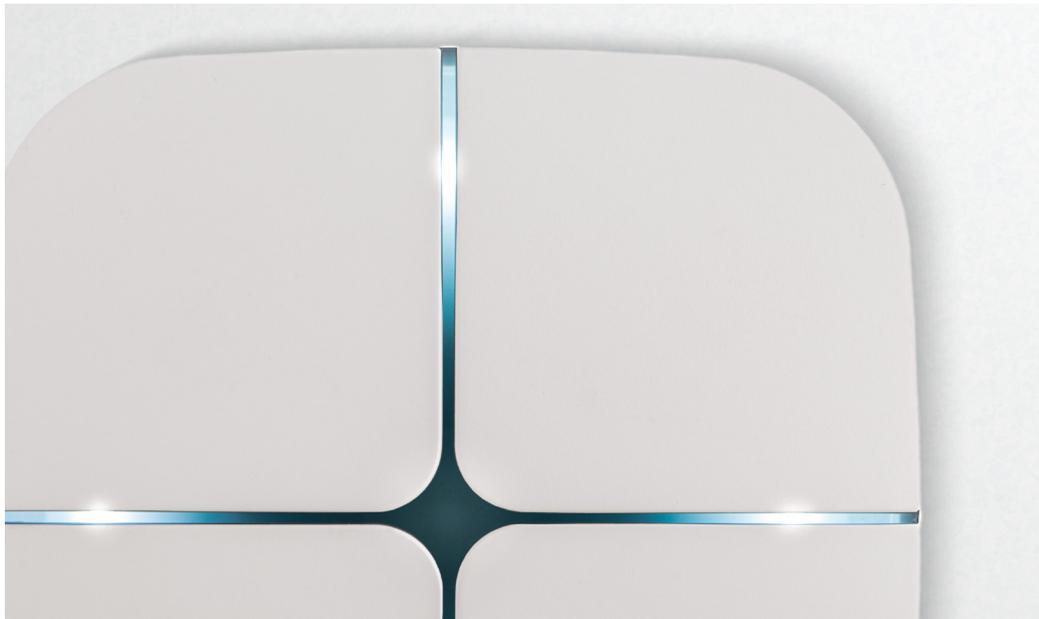

# KNX Capacitive Switch

The KNX® 9025 switch range consists of 4 – 8 – 10 channels capacitive buttons. Each button can be configured to manage on/off commands, dimming, shutters and venetians control, scene recall and control, objects sequences etc;

Device includes a 2 stage Room Temperature Controller with integrated PI to control heating and cooling equipments, valves, 2 and 4 pipes fan coils; etc. Device has an embedded temperature sensor and a rear 2 poles connector configurable as digital or analog input; It's possible to connect an additional NTC temperature probe (eelectron codes TS01A01ACC - TS01B01ACC - TS01D01ACC not included) to perform a direct temperature measurement.

9025 range has a RGB led bar on the front side in order to visualize feedbacks or other values available over the KNX bus (function available on the RGB range). Devices are available in 2 ranges: RGB LINE and RGB double glass; each range may have glasses in CUSTOM version. Using glasses in CUSTOM version is possible to light up custom and interchangeable icons matching with the associated function. The 9025 KNX® range is mounted in 2 module box and is compliant with main standards (British, German, Italian, etc).

Device is equipped with KNX communication interface.



## Order Codes

### KNX Capacitive Switch Boards

#### CS10A01KNX-1

KNX Capacitive switch - White

#### CS10A01KNX-3

KNX Capacitive switch - Black

### RGB Line Series Covers

#### 9025GL04L01

Single glass 4 ch. - White

#### 9025GL08L01

Single glass 8 ch. - White

#### 9025GL10L01

Single glass 10 ch. - White

#### 9025GL04L03

Single glass 4 ch. - Black

#### 9025GL08L03

Single glass 8 ch. - Black

#### 9025GL10L03

Single glass 10 ch. - Black

### RGB Range Covers

#### 9025GL04B01

Double Glass 4 channels - White

#### 9025GL08B01

Double Glass 8 channels - White

#### 9025GL10B01

Double Glass 10 channels - White

#### 9025GL04B03

Double Glass 4 channels - Black

#### 9025GL08B03

Double Glass 8 channels - Black

#### 9025GL10B03

Double Glass 10 channels - Black

### Line Series & RGB Range Covers – Custom

#### 9025GL10D01

CUSTOM double glass - White

#### 9025GL10D03

CUSTOM double glass - Black

#### 9025GL10W01


CUSTOM single glass - White

#### 9025GL10W03

CUSTOM single glass - Black

## Technical Features

<b>Mechanical data</b>	<ul style="list-style-type: none"> <li>Dimensions: (W x H x D) 96 x 96 x 36 mm</li> </ul>
<b>Mounting</b>	<ul style="list-style-type: none"> <li>British box, German box or Italian 2 modules box</li> </ul>
<b>Supply</b>	<ul style="list-style-type: none"> <li>Via bus EIB/KNX cable: 21 ÷ 32 Vdc</li> </ul>
<b>Rear Input - digital mode</b>	<ul style="list-style-type: none"> <li>For free potential contacts (dry contacts)</li> <li>Max. length of Connecting Cables ≤ 10 m (twisted cable)</li> </ul>
<b>Rear input - analog mode for temperature probe</b>	<p>For NTC temperature probe eelectron code:</p> <ul style="list-style-type: none"> <li>TS01A01ACC (range from -20°C to +100°C)</li> <li>TS01B01ACC (range from -50°C to +60°C)</li> <li>TS01D01ACC (range from -40°C to 125°C)</li> <li>Max. length of Connecting Cable: ≤ 20 m (twisted cable)</li> </ul>

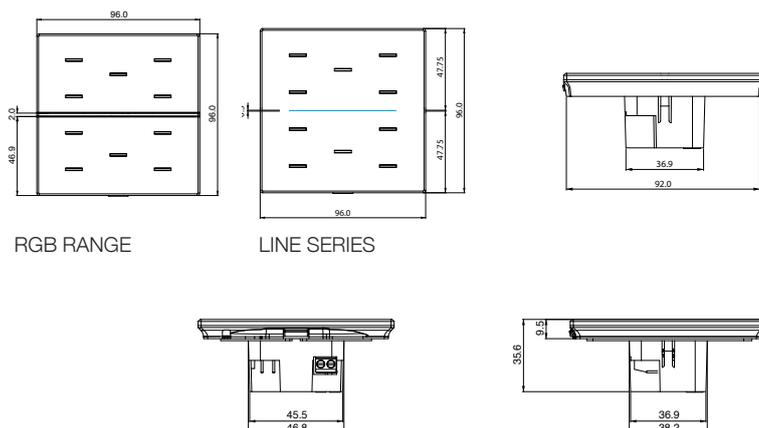

RGB RANGE

LINE SERIES

2 Modules Version

KNX Capacitive Switch Boards



**CS10A01KNX-1**  
Capacitive switch KNX - White



**CS10A01KNX-3**  
Capacitive switch KNX - Black

RGB Line Series Covers



**9025GL04L01**  
Single glass 4 ch. - White



**9025GL08L01**  
Single glass 8 ch. - White



**9025GL10L01**  
Single glass 10 ch. - White



**9025GL04L03**  
Single glass 4 ch. - Black



**9025GL08L03**  
Single glass 8 ch. - Black



**9025GL10L03**  
Single glass 10 ch. - Black

RGB Double Glass Range Covers



**9025GL04B01**  
Double glass 4 ch. - White



**9025GL08B01**  
Double glass 8 ch. - White




**9025GL10B01**  
Double glass 10 ch. - White



**9025GL04B03**  
Double glass 4 ch. - Black



**9025GL08B03**  
Double glass 8 ch. - Black




**9025GL10B03**  
Double glass 10 ch. - Black

Line Series & Double Glass Range Covers — CUSTOM




**9025GL10D01**  
CUSTOM double glass - White



**9025GL10D03**  
CUSTOM double glass - Black



**9025GL10W01**  
CUSTOM single glass - White



**9025GL10W03**  
CUSTOM single glass - Black

CUSTOM version covers have to be associated with dedicated interchangeable icons sheets.


# KNX Capacitive Switch

The KNX® 9025 switch range consists of 4 - 8 - 10 channels capacitive buttons. Each button can be configured to manage on/off commands, dimming, shutters and venetians control, scene recall and control, objects sequences etc;

Device includes a 2 stage Room Temperature Controller with integrated PI to control heating and cooling equipments, valves, 2 and 4 pipes fan coils; etc. Device has an embedded temperature sensor and a rear 2 poles connector configurable as digital or analog input; It's possible to connect an additional NTC temperature probe (eelectron codes TS01A01ACC - TS01B01ACC - TS01D01ACC not included) to perform a direct temperature measurement.

9025 range has a RGB led bar on the front side in order to visualize feedbacks or other values available over the KNX bus (function available on the RGB range). Devices are available in 2 ranges: RGB LINE and RGB double glass; each range may have glasses in CUSTOM version. Using glasses in CUSTOM version is possible to light up custom and interchangeable icons matching with the associated function. The 9025 KNX® range is mounted in 3 module box and is compliant with main standards (British, German, Italian, etc).

Device is equipped with KNX communication interface.

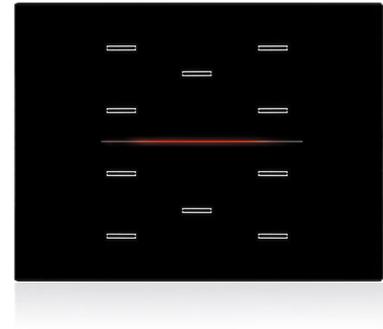

## Order Codes

### KNX Capacitive Switch Boards

#### CS10A01KNX-1-3M

KNX Capacitive switch - 3 Modules - White

#### CS10A01KNX-3-3M

KNX Capacitive switch - 3 Modules - Black

### RGB Line Series Covers

#### 9025GL304L01

Glass 4 channels - 3 Modules - White

#### 9025GL308L01

Glass 8 channels - 3 Modules - White

#### 9025GL310L01

Glass 10 channels - 3 Modules - White

#### 9025GL304L03

Glass 4 channels - 3 Modules - Black

#### 9025GL308L03

Glass 8 channels - 3 Modules - Black

#### 9025GL310L03

Glass 10 channels - 3 Modules - Black

### RGB Line Series Covers — Custom

#### 9025GL310W01




Custom glass - 3 Modules - White

#### 9025GL310W03

Custom glass - 3 Modules - Black

## Technical Features

<b>Mechanical data</b>	<ul style="list-style-type: none"> <li>Dimensions: (W x H x D) 96 x 126 x 36 mm</li> </ul>
<b>Mounting</b>	<ul style="list-style-type: none"> <li>British box, German box or Italian 2/3 modules box</li> </ul>
<b>Supply</b>	<ul style="list-style-type: none"> <li>Via bus EIB/KNX cable: 21 ÷ 32 Vdc</li> </ul>
<b>Rear Input - digital mode</b>	<ul style="list-style-type: none"> <li>For free potential contacts (dry contacts)</li> <li>Max. length of Connecting Cables ≤ 10 m (twisted cable)</li> </ul>
<b>Rear input - analog mode for temperature probe</b>	<p>For NTC temperature probe eelectron code:</p> <ul style="list-style-type: none"> <li>TS01A01ACC (range from -20°C to +100°C)</li> <li>TS01B01ACC (range from -50°C to +60°C)</li> <li>TS01D01ACC (range from -40°C to 125°C)</li> <li>Max. length of Connecting Cable: ≤ 20 m (twisted cable)</li> </ul>

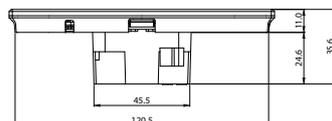

3 Modules Version

KNX Capacitive Switch Boards




**CS10A01KNX-1 - 3M**  
Capacitive switch KNX - White




**CS10A01KNX-3 - 3M**  
Capacitive switch KNX - Black


RGB Line Series Covers



**9025GL304L01**  
Glass 4 ch. - 3 Modules - White



**9025GL308L01**  
Glass 8 ch. - 3 Modules - White




**9025GL310L01**  
Glass 10 ch. - 3 Modules - White



**9025GL304L03**  
Glass 4 ch. - 3 Modules - Black



**9025GL308L03**  
Glass 8 ch. - 3 Modules - Black




**9025GL310L03**  
Glass 10 ch. - 3 Modules - Black

RGB Line Series Covers — CUSTOM



**9025GL310D01**  
CUSTOM glass - 3 Modules  
White



**9025GL310D03**  
CUSTOM glass - 3 Modules  
Black

CUSTOM version covers have to be associated with dedicated interchangeable icons sheets.

# KNX Thermostat / Humidistat

The 9025 thermostat is a KNX® room temperature controller that includes 7 Order Codes configurable capacitive buttons for on / off, dimming, rolling shutters and venetian controls, scene recall and control, object sequences, local thermostat controls, etc.

Device offers a 2 stage thermostat with integrated PI controller to control heating and cooling equipments, valves, 2 and 4 pipes fan coils etc ..

Device has an embedded temperature sensor and a rear 2 poles connector, configurable as digital or analog input; It's possible to connect an additional NTC temperature probe (electron codes TS01A01ACC - TS01B01ACC - TS01D01ACC not included) to perform a direct temperature measurement. A version with integrated temperature and relative humidity sensor is available usable for controlling actuators for ambient humidity control.

9025 range has a RGB led bar on the front side in order to visualize thermostat operating modes or feedbacks and other values available over the KNX bus. The device includes an RGB led bar on the front to display status or other values available on the KNX bus. Glass covers are available for HOTEL or RESIDENTIAL applications; both covers can be in CUSTOM version. Using glasses in CUSTOM version is possible to light up custom and interchangeable icons matching with the associated function.

The 9025 KNX® range is mounted in 2 module box and is compliant with main standards (British, German, Italian, etc).

Device is equipped with KNX communication interface.



## Order Codes

### KNX Thermostat/Humidistat Boards

#### RT07A01KNX-1

KNX Capacitive Thermostat - White

#### RH07A01KNX-1

KNX Capacitive Thermostat/Humidistat White

#### RT07A01KNX-3

KNX Capacitive Thermostat - Black

#### RH07A01KNX-3

KNX Capacitive Thermostat/Humidistat Black

### Thermostat/Humidistat Covers

#### 9025GT07L01-R

Single glass - RESIDENTIAL display White

#### 9025GT07L01-H

Single glass - HOTEL display White

#### 9025GT07L03-R

Single glass - RESIDENTIAL display Black

#### 9025GT07L03-H

Single glass - HOTEL display Black

### Custom version Cover

#### 9025GT07W01-R

CUSTOM single glass RESIDENTIAL White

#### 9025GT07W03-R

CUSTOM single glass RESIDENTIAL Black

#### 9025GT07W01-H






CUSTOM single glass HOTEL - White

#### 9025GT07W03-H

CUSTOM single glass HOTEL - Black

## Technical Features

<b>Mechanical data</b>	<ul style="list-style-type: none"> <li>Dimensions: (W x H x D) 96 x 96 x 36 mm</li> </ul>
<b>Mounting</b>	<ul style="list-style-type: none"> <li>British box, German box or Italian 2 modules box</li> </ul>
<b>Supply</b>	<ul style="list-style-type: none"> <li>Via bus EIB/KNX cable: 21 ÷ 32 Vdc</li> </ul>
<b>Rear Input - digital mode</b>	<ul style="list-style-type: none"> <li>For free potential contacts (dry contacts)</li> <li>Max. length of Connecting Cables ≤ 10 m (twisted cable)</li> </ul>
<b>Rear input - analog mode for temperature probe</b>	<p>For NTC temperature probe electron code:</p> <ul style="list-style-type: none"> <li>TS01A01ACC (range from -20°C to +100°C)</li> <li>TS01B01ACC (range from -50°C to +60°C)</li> <li>TS01D01ACC (range from -40°C to 125°C)</li> <li>Max. length of Connecting Cable: ≤ 20 m (twisted cable)</li> </ul>

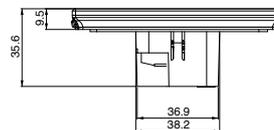

2 Modules Version

**KNX Capacitive Thermostat Boards**



**RT07A01KNX-1**  
KNX capacitive thermostat  
White



**RH07A01KNX-1**  
KNX capacitive thermostat/humidistat  
White



**RT07A01KNX-3**  
KNX capacitive thermostat  
Black



**RH07A01KNX-3**  
KNX capacitive thermostat/humidistat  
Black

**Thermostat/Humidistat RGB Line Series Covers**



**9025GT07L01-R**  
Single Glass  
RESIDENTIAL display - White



**9025GT07L01-H**  
Single Glass  
HOTEL display - White



**9025GT07L03-R**  
Single Glass  
RESIDENTIAL display - Black



**9025GT07L03-H**  
Single Glass  
HOTEL display - White

**Custom Version — Residential RGB Line Series**



**9025GT07W01-R**  
Single CUSTOM Glass  
RESIDENTIAL display - White



**9025GT07W03-R**  
Single CUSTOM Glass  
RESIDENTIAL display - Black

**Custom Version — Hotel RGB Line Series**



**9025GT07W01-H**  
Single CUSTOM Glass  
HOTEL display - White



**9025GT07W03-H**  
Single CUSTOM Glass  
HOTEL display - Black

# KNX Thermostat / Humidistat

The 9025 thermostat is a KNX® room temperature controller that includes 7 Order Codes configurable capacitive buttons for on / off, dimming, rolling shutters and venetian controls, scene recall and control, object sequences, local thermostat controls, etc.

Device offers a 2 stage thermostat with integrated PI controller to control heating and cooling equipments, valves, 2 and 4 pipes fan coils etc ..


Device has an embedded temperature sensor and a rear 2 poles connector, configurable as digital or analog input; It's possible to connect an additional NTC temperature probe (eelectron codes TS01A01ACC or TS01B01ACC - not included) to perform a direct temperature measurement.

A version with integrated temperature and relative humidity sensor is available usable for controlling actuators for ambient humidity control.

9025 range has a RGB led bar on the front side in order to visualize thermostat operating modes or feedbacks and other values available over the KNX bus. The device includes an RGB led bar on the front to display status or other values available on the KNX bus. Glass covers are available for HOTEL or RESIDENTIAL applications; both covers can be in CUSTOM version. Using glasses in CUSTOM version is possible to light up custom and interchangeable icons matching with the associated function.

The 9025 KNX® range is mounted in 2 module box and is compliant with main standards (British, German, Italian, etc).

Device is equipped with KNX communication interface.

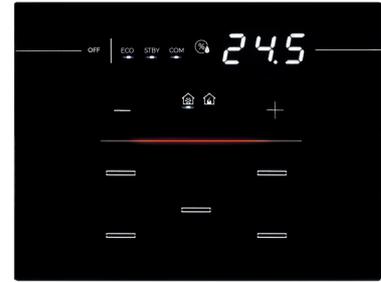

## Order Codes

### KNX Thermostat/Humidistat Boards

#### RT07A01KNX-1-3M

KNX Capacitive Thermostat - 3 Modules White

#### RH07A01KNX-1-3M

KNX Capacitive Thermostat/Humidistat 3 Modules - White

#### RT07A01KNX-3-3M

KNX Capacitive Thermostat - 3 Modules Black

#### RH07A01KNX-3-3M

KNX Capacitive Thermostat/Humidistat 3 Modules - Black

### Thermostat/Humidistat RGB Line Series Covers

#### 9025GT307L01-R

Single glass RESIDENTIAL display - 3 Modules - White

#### 9025GT307L01-H

Single glass HOTEL display - 3 Modules White

#### 9025GT307L03-R

Single glass RESIDENTIAL display - 3 Modules - Black

#### 9025GT307L03-H

Single glass HOTEL display - 3 Modules Black

### Custom Version | RGB Line Series

#### 9025GT307W01-R

CUSTOM single glass RESIDENTIAL - 3 Modules - White

#### 9025GT307W03-R

CUSTOM single glass RESIDENTIAL - 3 Modules - Black

#### 9025GT307W01-H


CUSTOM single glass HOTEL - 3 Modules White

#### 9025GT307W03-H

CUSTOM single glass HOTEL - 3 Modules Black

## Technical Features

<b>Mechanical data</b>	<ul style="list-style-type: none"> <li>Dimensions: (W x H x D) 96 x 96 x 36 mm</li> </ul>
<b>Mounting</b>	<ul style="list-style-type: none"> <li>British box, German box or Italian 2 modules box</li> </ul>
<b>Supply</b>	<ul style="list-style-type: none"> <li>Via bus EIB/KNX cable: 21 ÷ 32 Vdc</li> </ul>
<b>Rear Input - digital mode</b>	<ul style="list-style-type: none"> <li>For free potential contacts (dry contacts)</li> <li>Max. length of Connecting Cables ≤ 10 m (twisted cable)</li> </ul>
<b>Rear input - analog mode for temperature probe</b>	<p>For NTC temperature probe eelectron code:</p> <ul style="list-style-type: none"> <li>TS01A01ACC (range from -20°C to +100°C)</li> <li>TS01B01ACC (range from -50°C to +60°C)</li> <li>TS01D01ACC (range from -40°C to 125°C)</li> <li>Max. length of Connecting Cable: ≤ 20 m (twisted cable)</li> </ul>

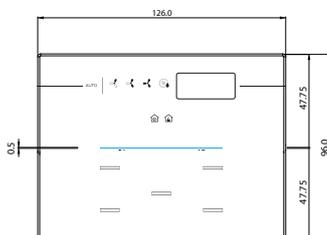

3 Modules Version

**KNX Capacitive Thermostat Boards**



**RT07A01KNX-1-3M**  
KNX capacitive thermostat - White



**RH07A01KNX-1-3M**  
KNX capacitive thermostat/humidistat - White



**RT07A01KNX-3-3M**  
KNX capacitive thermostat - Black




**RH07A01KNX-3-3M**  
KNX capacitive thermostat/humidistat - Black

**Thermostat/Humidistat RGB Line Series Covers**



**9025GT307L01-R**  
Single Glass  
RESIDENTIAL display - White



**9025GT307L01-H**  
Single Glass  
HOTEL display - White



**9025GT307L03-R**  
Single Glass  
RESIDENTIAL display - Black



**9025GT307L03-H**  
Single Glass  
HOTEL display - Black

**Custom Version — Residential | RGB Line Series**



**9025GT307W01-R**  
CUSTOM Single Glass  
RESIDENTIAL display - White



**9025GT307W03-R**  
CUSTOM Single Glass  
RESIDENTIAL display - Black

**Custom Version — Hotel | RGB Line Series**



**9025GT307W01-H**  
CUSTOM Single Glass  
HOTEL display - White



**9025GT307W03-H**  
CUSTOM Single Glass  
HOTEL display - Black

# KNX Thermostat / Humidistat



**RT07A01KNX-1**  
KNX capacitive thermostat  
White



**RH07A01KNX-1**  
KNX capacitive thermostat/humidistat  
White



**RT07A01KNX-3**  
KNX capacitive thermostat  
Black



**RH07A01KNX-3**  
KNX capacitive thermostat/humidistat  
Black



## Order Codes

### Thermostat/Humidistat KNX

#### RT07A01KNX-1

KNX Capacitive Thermostat - White

#### RH07A01KNX-1

KNX Capacitive Thermostat/Humidistat  
White

#### RT07A01KNX-3

KNX Capacitive Thermostat - Black

#### RH07A01KNX-3

KNX Capacitive Thermostat/Humidistat  
Black

### Thermostat/Humidistat Covers

#### 9025GT07B01R

Double glass RESIDENTIAL display - White

#### 9025GT07B01H

Double glass HOTEL display - White

#### 9025GT07B03R

Double glass RESIDENTIAL display - Black

#### 9025GT07B03H

Double glass HOTEL display - Black

### Custom Version Covers

#### 9025GT07D01R

CUSTOM Double glass RESIDENTIAL  
display - White

#### 9025GT07D03R

CUSTOM Double glass RESIDENTIAL  
display - Black

#### 9025GT07D01H

CUSTOM Double glass HOTEL display -  
White

#### 9025GT07D03H

CUSTOM Double glass HOTEL display -  
Black

## Thermostat/Humidistat Covers



**9025GT07B01-R**  
Double glass  
RESIDENTIAL display  
White



**9025GT07B01-H**  
Double glass  
HOTEL display  
White



**9025GT07B03-R**  
Double glass  
RESIDENTIAL display  
Black



**9025GT07B03-H**  
Double glass  
HOTEL display  
Black

## Custom Version — Residential



**9025GT07D01-R**  
CUSTOM double glass  
RESIDENTIAL display  
White



**9025GT07D03-R**  
CUSTOM double glass  
RESIDENTIAL display  
Black



## Custom Version — Hotel



**9025GT07D01-H**  
CUSTOM double glass  
HOTEL display  
White




**9025GT07D03-H**  
CUSTOM double glass  
HOTEL display  
Black

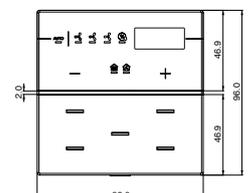

# Icons Sheet Sets

## Order Codes

- 9025ISA-1**  
Icon sheet SET A - 32 icons - White
- 9025ISB-1**  
Icon sheet SET B - 32 icons - White
- 9025ISC-1**  
Icon sheet SET C - 32 icons - White
- 9025ISD-1**  
Icon sheet SET D - 32 icons - White
- 9025ISE-1**  
Icon sheet SET E - 32 icons - White
- 9025ISF-1**  
Icon sheet SET F - 32 icons - White
- 9025ISH-1**  
Icon sheet SET H - 32 icons - White
- 9025ISA-3**  
Icon sheet SET A - 32 icons - Black
- 9025ISB-3**  
Icon sheet SET B - 32 icons - Black
- 9025ISC-3**  
Icon sheet SET C - 32 icons - Black
- 9025ISD-3**  
Icon sheet SET D - 32 icons - Black
- 9025ISE-3**  
Icon sheet SET E - 32 icons - Black
- 9025ISF-3**  
Icon sheet SET F - 32 icons - Black
- 9025ISH-3**  
Icon sheet SET H - 32 icons - Black



**9025ISA-1**  
icon sheet  
SET A | White  
32 icons




**9025ISB-1**  
icon sheet  
SET B | White  
32 icons




**9025ISC-1**  
icon sheet  
SET C | White  
32 icons



**9025ISD-1**  
icon sheet  
SET D | White  
32 icons




**9025ISE-1**  
icon sheet  
SET E | White  
32 icons




**9025ISF-1**  
icon sheet  
SET F | White  
32 icons



**9025ISH-1**  
icon sheet  
SET H | White  
32 icons



**9025ISA-3**  
icon sheet  
SET A | Black  
32 icons




**9025ISB-3**  
icon sheet  
SET B | Black  
32 icons




**9025ISC-3**  
icon sheet  
SET C | Black  
32 icons



**9025ISD-3**  
icon sheet  
SET D | Black  
32 icons



**9025ISE-3**  
icon sheet  
SET E | Black  
32 icons



**9025ISF-3**  
icon sheet  
SET F | Black  
32 icons



**9025ISH-3**  
icon sheet  
SET H | Black  
32 icons

# 9025 Multisensor Controller

## HUMIDITY - TEMPERATURE

The environmental sensor HC06A01KNX is a device of the 9025 series, it is wall-mounted and finished with a white or black glass.


The HC06A01KNX device integrates humidity and temperature sensors. The device is also equipped with a 2-way connector on the rear side that can be configured as a digital or analogue input; in fact it is possible to connect an additional NTC probe to the device (eelectron code TS01A01ACC - TS01B01ACC - TS01D01ACC not included) to obtain a second temperature measurement.

The device includes 2 double-stage thermostats for controlling two distinct areas, both with an integrated PI controller for driving heating and cooling equipment, valves, 6-way valves, 2 and 4-pipe fan coils, etc ...

The humidity sensor manages the reading of the relative humidity in the environment and allows threshold control with hysteresis of humidification and dehumidification equipments.

The device embeds 6 capacitive keys for the management of on / off commands, dimmers, shutters and blinds, execution and learning of scenarios, object sequences, local thermostat controls, etc.

It includes a RGB LED on the front side for displaying states (temperature, humidity and CO2) or other quantities available on the KNX bus.

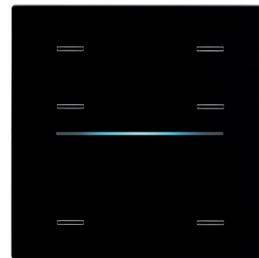

### Order Codes

#### KNX Capacitive Switch Boards

##### HC06A01KNX-3

Humidity Sensor + Thermostat - Inwall - No Display - White

##### HC06A01KNX-1

Humidity Sensor + Thermostat - Inwall - No Display - Black

#### RGB Range Covers

##### 9025GH06L01

Single glass line 6 ch. - White


##### 9025GH06L03

Single glass line 6 ch. - Black



9025GH06 L01

Single glass line 6 ch. - White



9025GH06 L03

Single glass line 6 ch. - Black

### Technical Features

<b>Mechanical data</b>	<ul style="list-style-type: none"> <li>• Dimensions: (W x H x D) 96 x 96 x 36 mm</li> </ul>
<b>Mounting</b>	<ul style="list-style-type: none"> <li>• British box, German box or Italian 2 modules box</li> </ul>
<b>Supply</b>	<ul style="list-style-type: none"> <li>• Via bus EIB/KNX cable: 21 ÷ 32 Vdc</li> </ul>
<b>Rear Input - digital mode</b>	<ul style="list-style-type: none"> <li>• For free potential contacts (dry contacts)</li> <li>• Max. length of Connecting Cables ≤ 10 m (twisted cable)</li> <li>• Voltage Scanning 3,3 Vdc (internally generated)</li> </ul>
<b>Rear input - analog mode for temperature probe</b>	<p>For NTC temperature probe eelectron code:</p> <ul style="list-style-type: none"> <li>• TS01A01ACC (range from -20°C to +100°C)</li> <li>• TS01B01ACC (range from -50°C to +60°C)</li> <li>• TS01D01ACC (range from -40°C to 125°C)</li> <li>• Max. length of Connecting Cable: ≤ 20 m (twisted cable)</li> </ul>

# 9025 Multisensor Controller

## CO<sub>2</sub> - HUMIDITY - TEMPERATURE

The environmental sensor MC06A01KNX is a device of the 9025 series, it is wall-mounted and finished with a white or black glass.

In the MC06A01KNX device there are 3 sensors available: temperature, humidity and CO<sub>2</sub>, this measure is detected by using an integrated probe specially designed to detect CO<sub>2</sub> data directly and not through calculations based on other sensors.


The device is also equipped with a 2-way connector on the rear side that can be configured as a digital or analogue input; in fact it is possible to connect an additional NTC probe to the device (eelectron code TS01A01ACC - TS01B01ACC - TS01D01ACC not included) to obtain a second temperature measurement.

The device includes 2 double-stage thermostats for controlling two distinct areas, both with an integrated PI controller for driving heating and cooling equipment, valves, 6-way valves, 2 and 4-pipe fan coils, etc ...

The humidity sensor manages the reading of the relative humidity in the environment and allows threshold control with hysteresis of humidification and dehumidification equipments.

The device embeds 6 capacitive keys for the management of on / off commands, dimmers, shutters and blinds, execution and learning of scenarios, object sequences, local thermostat controls, etc.

It includes a RGB LED on the front side for displaying states (temperature, humidity and CO<sub>2</sub>) or other quantities available on the KNX bus.

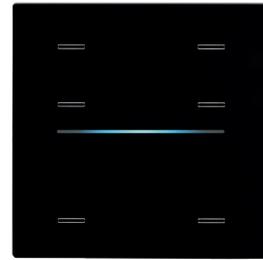

### Order Codes

#### KNX Capacitive Switch Boards

##### MC06A01KNX-1

Multisensor CO<sub>2</sub> + Humidity + Temperature  
- Inwall - No Display - White

##### MC06A01KNX-3

Multisensor CO<sub>2</sub> + Humidity + Temperature  
- Inwall - No Display - Black

#### RGB Range Covers

##### 9025GM06L01

Single glass line 6 ch. - White

##### 9025GM06L03

Single glass line 6 ch. - Black



9025GM06L01

Single glass line 6 ch. - White



9025GM06L03

Single glass line 6 ch. - Black

### Technical Features

<b>Mechanical data</b>	<ul style="list-style-type: none"> <li>• Dimensions: (W x H x D) 96 x 96 x 40 mm</li> </ul>
<b>Mounting</b>	<ul style="list-style-type: none"> <li>• British box, German box or Italian 2 modules box</li> </ul>
<b>Supply</b>	<ul style="list-style-type: none"> <li>• Via bus EIB/KNX cable: 21 ÷ 32 Vdc</li> </ul>
<b>Rear Input - digital mode</b>	<ul style="list-style-type: none"> <li>• For free potential contacts (dry contacts)</li> <li>• Max. length of Connecting Cables ≤ 10 m (twisted cable)</li> <li>• Voltage Scanning 3,3 Vdc (internally generated)</li> </ul>
<b>Rear input - analog mode for temperature probe</b>	For NTC temperature probe eelectron code: <ul style="list-style-type: none"> <li>• TS01A01ACC (range from -20°C to +100°C)</li> <li>• TS01B01ACC (range from -50°C to +60°C)</li> <li>• TS01D01ACC (range from -40°C to 125°C)</li> <li>• Max. length of Connecting Cable: ≤ 20 m (twisted cable)</li> </ul>

# 9025 Temperature Probe

The device TS01D01ACC of the 9025 series is a temperature probe connectible to KNX® devices.

The device is used in combination with the glass covers available in white (electron code 9025GS00A01) or black (electron code 9025GS00A03) variants;

The device is mounted in 2 or 3 module box and is compliant with main standards (British, German, Italian, etc).



## Technical Features

<b>Mechanical data</b>	<ul style="list-style-type: none"> <li>Dimensions: (W x H x D) 96 x 96 x 36 mm</li> </ul>
<b>Rear input - analog mode for temperature probe</b>	<p>For NTC temperature probe electron code:</p> <ul style="list-style-type: none"> <li>TS01A01ACC (range from -20°C to +100°C)</li> <li>TS01B01ACC (range from -50°C to +60°C)</li> <li>TS01D01ACC (range from -40°C to 125°C)</li> <li>Max. length of Connecting Cable: ≤ 30 m (twisted cable)</li> </ul>
<b>Environmental Specification</b>	<ul style="list-style-type: none"> <li>Operating temperature: -5 °C + 45 °C</li> <li>Storage temperature: - 20 °C + 55 °C</li> </ul>

## Order Codes

<b>TS01D01ACC-1</b> Temperature probe - White
<b>TS01D01ACC-3</b> Temperature probe - Black
<b>TS01D01ACC-1-3M</b> Temperature probe - 3 Modules - White
<b>TS01D01ACC-3-3M</b> Temperature probe - 3 Modules - Black
<b>9025GS00A01</b> Single glass - White
<b>9025GS00A03</b> Single glass - Black
<b>9025GS300A01</b> Single glass - 3 Modules - White
<b>9025GS300A03</b> Single glass - 3 Modules - Black

---

**KNX Capacitive Switch Boards**



**TS01D01ACC-1**  
Temperature probe - White



**TS01D01ACC-3**  
Temperature probe - Black



**TS01D01ACC-1-3M**  
Temperature probe - 3 Modules - White



**TS01D01ACC-3-3M**  
Temperature probe - 3 Modules - Black

---

**Single Glass Covers**



**9025GS00A01**  
Single glass - White



**9025GS00A03**  
Single glass - Black




**9025GS300A01**  
Single glass - 3 Modules - White



**9025GS300A03**  
Single glass - 3 Modules - Black

## 9025 Frames

Design frames and supports are available in 9025 glossy finish. A complement created to harmonize the aesthetics of electrical sockets and fruit holders as well. Available in PMMA and adapt with the most common European standard inwall boxes in 2, 3 and 4 modules formats.

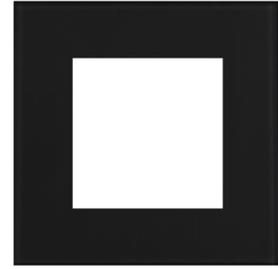

\*Compatible with 4Box®, Vitrum Design®, Biticino Living light®, Vimar Plana®, Vimar Arké® sockets.

### Order Codes

#### **AJ.19.L.02**

Support For 2 Modules Cover Frame (Pack Of 10 pcs.)\*

#### **AJ.19.L.03**

Support For 3 Modules Cover Frame (Pack Of 10 pcs.)\*

#### **AJ.19.L.04**

Support For 4 Modules Cover Frame (Pack Of 10 pcs.)\*

#### **EEBP200790001-3**

Design Frame - Black Lucid - 2 Modules - Pmma (Pack Of 10 pcs.)\*

#### **EEBP200790000-1**

Design Frame - White - 2 Modules - Pmma (Pack Of 10 pcs.)\*

#### **EEEEP300790001-3**

Design Frame - Black Lucid - 3 Modules - Pmma (Pack Of 10 pcs.)\*

#### **EEEEP300790000-1**

Design Frame - White - 3 Modules - Pmma (Pack Of 10 pcs.)\*

#### **EEQP400790001-3**


Design Frame - Black Lucid - 4 Modules - Pmma (Pack Of 10 pcs.)\*

#### **EEQP400790000-1**

Design Frame - White - 4 Modules - Pmma (Pack Of 10 pcs.)\*




AJ.19.L.02  
Support For 2 Modules Cover Frame




AJ.19.L.03  
Support For 3 Modules Cover Frame




AJ.19.L.04  
Support For 4 Modules Cover Frame



EEBP200790001-3  
Design Frame - Black Lucid - 2 Modules



EEBP200790000-1  
Design Frame - White - 2 Modules

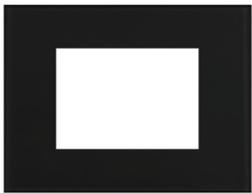

EEEP300790001-3  
Design Frame - Black Lucid - 3 Modules



EEEP300790000-1  
Design Frame - White - 3 Modules



EEQP400790001-3  
Design Frame - Black Lucid - 4 Modules



EEQP400790000-1  
Design Frame - White - 4 Modules

# 9025 Access Control

## KNX TRANSPONDER READER

The 9025 series devices dedicated to access control management are KNX® devices and use RFID - MIFARE® technology. The range includes: TR00C01KNX: Doorpanel transponder reader, TH00C01KNX: Transponder holder, TE00C01KNX: Transponder card programmer

The products are intended to be installed with the glass covers which can be customized on request.

The upper part of the glass is backlit (to illuminate the room number or a logo - both customizations on request); in the lower part there are 3 freely configurable backlit capacitive buttons.

For TR00C01KNX: 1 button (typically with bell function) and 2 LEDs for displaying the MUR and DND states.

The transponder is read by placing it in front of the reader, at a maximum distance of 30 mm. The color of the reader RGB LED bar indicates that the card has been recognized and shows different (configurable) colors for status or anomalies reporting, such as:

- Card recognized (welcome): default color Green
- Incorrect system code: color default Orange
- Unrecognized ID card: default color Red
- Wrong Card Date (validity expired): default color Yellow
- Wrong time of day (Entry forbidden time): default color Magenta
- Wrong day of the week (Entry prohibited day): default color Blue-Cyan

The reader also integrates a buzzer (which can be activated with the ETS parameter) for anomalies signaling.

The 9025 KNX® range is mounted in 2 modules box and is compliant with main standards (British, German, Italian, etc). Device is equipped with KNX communication interface.

2 Modules Version



### Order Codes

#### KNX Transponder Reader

##### TR00C01KNX-1

Transponder Reader with 3 control buttons  
White

##### TR00C01KNX-3

Transponder Reader with 3 control buttons  
Black

#### Transponder Reader RGB Line Series Covers

##### 9025PTR03L01

Single plexiglass - White

##### 9025PTR03L03

Single plexiglass - Black

##### 9025GTR03L01


Single glass - White

##### 9025GTR03L03

Single glass - Black

### Technical Features

<b>Mechanical data</b>	<ul style="list-style-type: none"> <li>• Dimensions: (W x H x D) 96 x 96 x 36 mm</li> </ul>
<b>Mounting</b>	<ul style="list-style-type: none"> <li>• British box, German box or Italian 2 modules box</li> </ul>
<b>Supply</b>	<ul style="list-style-type: none"> <li>• Via bus EIB/KNX cable: 21 ÷ 32 Vdc</li> <li>• Auxiliary supply: 12 ÷ 24 Vdc / ac</li> </ul>
<b>Rear Input - digital mode</b>	<ul style="list-style-type: none"> <li>• For free potential contacts (dry contacts)</li> <li>• Max. length of Connecting Cables ≤ 10 m (twisted cable)</li> </ul>
<b>Rear input - analog mode for temperature probe</b>	<p>For NTC temperature probe eelectron code:</p> <ul style="list-style-type: none"> <li>• TS01A01ACC (range from -20°C to +100°C)</li> <li>• TS01B01ACC (range from -50°C to +60°C)</li> <li>• TS01D01ACC (range from -40°C to 125°C)</li> <li>• Max. length of Connecting Cable: ≤ 30 m (twisted cable)</li> </ul>

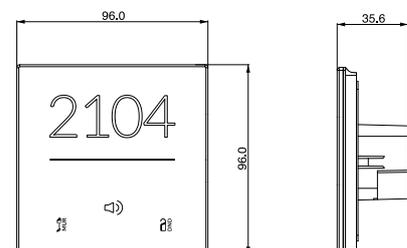

## 2 Modules Version

### KNX Transponder Reader



**TR00C01KNX-1**  
Transponder Reader with  
3 control buttons - White



**TR00C01KNX-3**  
Transponder Reader  
with 3 control buttons - Black

### Transponder Reader Covers | RGB Line Series



**9025PTR03L01**  
Single plexiglass - White



**9025PTR03L03**  
Single plexiglass - Black



**9025GTR03L01**  
Single glass - White



**9025GTR03L03**  
Single glass - Black

# 9025 Access Control

## KNX TRANSPONDER READER

The 9025 series devices dedicated to access control management are KNX® devices and use RFID - MIFARE® technology. The range includes: TR00C01KNX: Doorpanel transponder reader, TH00C01KNX: Transponder holder, TE00C01KNX: Transponder card programmer

The products are intended to be installed with the glass covers which can be customized on request.

The upper part of the glass is backlit (to illuminate the room number or a logo - both customizations on request); in the lower part there are 3 freely configurable backlit capacitive buttons.

For TR00C01KNX: 1 button (typically with bell function) and 2 LEDs for displaying the MUR and DND states.

The transponder is read by placing it in front of the reader, at a maximum distance of 30 mm. The color of the reader RGB LED bar indicates that the card has been recognized and shows different (configurable) colors for status or anomalies reporting, such as:

- Card recognized (welcome): default color Green
- Incorrect system code: color default Orange
- Unrecognized ID card: default color Red
- Wrong Card Date (validity expired): default color Yellow
- Wrong time of day (Entry forbidden time): default color Magenta
- Wrong day of the week (Entry prohibited day): default color Blue-Cyan

The reader also integrates a buzzer (which can be activated with the ETS parameter) for anomalies signaling.

The 9025 KNX® range is mounted in 3 modules box and is compliant with main standards (British, German, Italian, etc). Device is equipped with KNX communication interface.



### Order Codes

#### KNX Transponder Reader

##### TR00C01KNX-1-3M

Transponder Reader with 3 control buttons  
3 Modules - White

##### TR00C01KNX-3-3M

Transponder Reader with 3 control buttons  
3 Modules - Black

#### Transponder Reader RGB Line Series Covers

##### 9025PTR303L01

Single plexiglass - 3 Modules - White

##### 9025PTR303L03

Single plexiglass - 3 Modules - Black

##### 9025GTR303L01


Single glass - 3 Modules - White

##### 9025GTR303L03

Single glass - 3 Modules - Black

### Technical Features

<b>Mechanical data</b>	<ul style="list-style-type: none"> <li>• Dimensions: (W x H x D) 126 x 96 x 36 mm</li> </ul>
<b>Mounting</b>	<ul style="list-style-type: none"> <li>• British box, German box or Italian 2 or 3 modules box</li> </ul>
<b>Supply</b>	<ul style="list-style-type: none"> <li>• Via bus EIB/KNX cable: 21 ÷ 32 Vdc</li> <li>• Auxiliary supply: 12 ÷ 24 Vdc / ac</li> </ul>
<b>Rear Input - digital mode</b>	<ul style="list-style-type: none"> <li>• For free potential contacts (dry contacts)</li> <li>• Max. length of Connecting Cables ≤ 10 m (twisted cable)</li> </ul>
<b>Rear input - analog mode for temperature probe</b>	<p>For NTC temperature probe eelectron code:</p> <ul style="list-style-type: none"> <li>• TS01A01ACC (range from -20°C to +100°C)</li> <li>• TS01B01ACC (range from -50°C to +60°C)</li> <li>• TS01D01ACC (range from -40°C to 125°C)</li> <li>• Max. length of Connecting Cable: ≤ 30 m (twisted cable)</li> </ul>

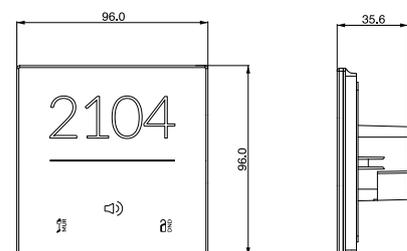

### 3 Modules Version

### KNX Transponder Reader



**TR00C01KNX-1-3M**  
Transponder Reader with 3 control buttons 3 Modules - White



**TR00C01KNX-3-3M**  
Transponder Reader with 3 control buttons 3 Modules - Black

### Transponder Reader Covers | RGB Line Series



**9025PTR303L01**  
Single plexiglass - 3 Modules - White



**9025PTR303L03**  
Single plexiglass - 3 Modules - Black



**9025GTR303L01**  
Single glass - 3 Modules - White



**9025GTR303L03**  
Single glass - 3 Modules - Black

# 9025 Access Control

## KNX TRANSPONDER HOLDER

The 9025 series devices dedicated to access control management are KNX® devices and use RFID - MIFARE® technology. The range includes: TR00C01KNX: Doorpanel transponder reader, TH00C01KNX: Transponder holder, TE00C01KNX: Transponder card programmer.

The products are intended to be installed with the glass covers which can be customized on request.

The upper part of the glass is backlit (to illuminate the room number or a logo - both customizations on request); in the lower part there are 3 freely configurable backlit capacitive buttons.

For TR00C01KNX: 1 button (typically with bell function) and 2 LEDs for displaying the MUR and DND states

For TH00C01KNX: 1 button (typically with CAMERA LIGHTS function) and 2 buttons for setting MUR and DND

The transponder is read by placing it in front of the reader, at a maximum distance of 20 mm; in the case of the transponder pocket, the card is inserted into a compartment from the top of the device. The color of the reader RGB LED bar indicates that the card has been recognized and shows different (configurable) colors for status or anomalies reporting. The reader also integrates a buzzer (which can be activated with the ETS parameter) for anomalies signaling. Device is equipped with KNX communication interface.



### Order Codes

#### KNX Transponder Holder

##### TH00C01KNX-1

Transponder Holder with 3 control buttons  
White

##### TH00C01KNX-3

Transponder Holder with 3 control buttons  
Black

#### Transponder Holder RGB Line Series Covers

##### 9025PTH03L01

Single plexiglass - White

##### 9025PTH03L03

Single plexiglass - Black

##### 9025GTH03L01


Single glass - White

##### 9025GTH03L03

Single glass - Black

### Technical Features

<b>Mechanical data</b>	<ul style="list-style-type: none"> <li>• Dimensions: (W x H x D) 96 x 96 x 41,6 mm</li> </ul>
<b>Mounting</b>	<ul style="list-style-type: none"> <li>• British box, German box or Italian 2 modules box</li> </ul>
<b>Supply</b>	<ul style="list-style-type: none"> <li>• Via bus EIB/KNX cable: 21 ÷ 32 Vdc</li> <li>• Auxiliary supply: 12 ÷ 24 Vdc / ac</li> </ul>
<b>Rear Input - digital mode</b>	<ul style="list-style-type: none"> <li>• For free potential contacts (dry contacts)</li> <li>• Max. length of Connecting Cables ≤ 10 m (twisted cable)</li> </ul>
<b>Rear input - analog mode for temperature probe</b>	<p>For NTC temperature probe eelectron code:</p> <ul style="list-style-type: none"> <li>• TS01A01ACC (range from -20°C to +100°C)</li> <li>• TS01B01ACC (range from -50°C to +60°C)</li> <li>• TS01D01ACC (range from -40°C to 125°C)</li> <li>• Max. length of Connecting Cable: ≤ 30 m (twisted cable)</li> </ul>

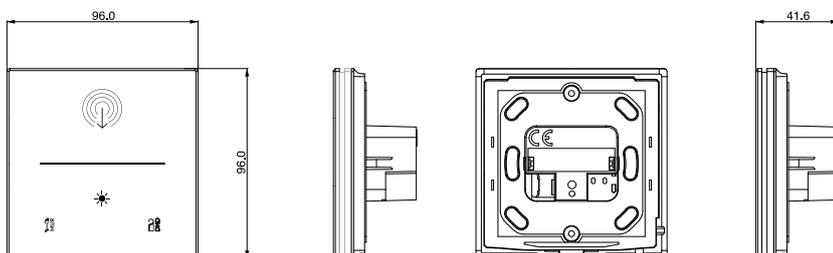

## 2 Modules Version

### KNX Transponder Holder



**TH00C01KNX-1**  
Transponder Holder with 3 control buttons - White



**TH00C01KNX-3**  
Transponder Holder with 3 control buttons - Black

### Transponder Holder Covers | RGB Line Series



**9025PTH03L01**  
Single plexiglass - White



**9025PTH03L03**  
Single plexiglass - Black



**9025GTH03L01**  
Single glass - White



**9025GTH03L03**  
Single glass - Black

# 9025 Access Control

## KNX TRANSPONDER HOLDER

The 9025 series devices dedicated to access control management are KNX® devices and use RFID - MIFARE® technology. The range includes: TR00C01KNX: Doorpanel transponder reader, TH00C01KNX: Transponder holder, TE00C01KNX: Transponder card programmer.

The products are intended to be installed with the glass covers which can be customized on request.

The upper part of the glass is backlit (to illuminate the room number or a logo - both customizations on request); in the lower part there are 3 freely configurable backlit capacitive buttons.

For TR00C01KNX: 1 button (typically with bell function) and 2 LEDs for displaying the MUR and DND states

For TH00C01KNX: 1 button (typically with CAMERA LIGHTS function) and 2 buttons for setting MUR and DND

The transponder is read by placing it in front of the reader, at a maximum distance of 20 mm; in the case of the transponder pocket, the card is inserted into a compartment from the top of the device. The color of the reader RGB LED bar indicates that the card has been recognized and shows different (configurable) colors for status or anomalies reporting. The reader also integrates a buzzer (which can be activated with the ETS parameter) for anomalies signaling. Device is equipped with KNX communication interface.



### Order Codes

#### Transponder Holder

##### TH00C01KNX-1-3M

Transponder Holder with 3 control buttons  
3 Modules - White

##### TH00C01KNX-3-3M

Transponder Holder with 3 control buttons  
3 Modules - Black

#### Transponder Holder RGB Line Series Covers

##### 9025PTR303L01

Single plexiglass - 3 Modules - White

##### 9025PTR303L03

Single plexiglass - 3 Modules - Black

##### 9025GTR303L01


Single glass - 3 Modules - White

##### 9025GTR303L03

Single glass - 3 Modules - Black

### Technical Features

<b>Mechanical data</b>	<ul style="list-style-type: none"> <li>• Dimensions: (W x H x D) 126 x 96 x 36 mm</li> </ul>
<b>Mounting</b>	<ul style="list-style-type: none"> <li>• British box, German box or Italian 2 or 3 modules box</li> </ul>
<b>Supply</b>	<ul style="list-style-type: none"> <li>• Via bus EIB/KNX cable: 21 ÷ 32 Vdc</li> <li>• Auxiliary supply: 12 ÷ 24 Vdc / ac</li> </ul>
<b>Rear Input - digital mode</b>	<ul style="list-style-type: none"> <li>• For free potential contacts (dry contacts)</li> <li>• Max. length of Connecting Cables ≤ 10 m (twisted cable)</li> </ul>
<b>Rear input - analog mode for temperature probe</b>	<p>For NTC temperature probe eelectron code:</p> <ul style="list-style-type: none"> <li>• TS01A01ACC (range from -20°C to +100°C)</li> <li>• TS01B01ACC (range from -50°C to +60°C)</li> <li>• TS01D01ACC (range from -40°C to 125°C)</li> <li>• Max. length of Connecting Cable: ≤ 30 m (twisted cable)</li> </ul>

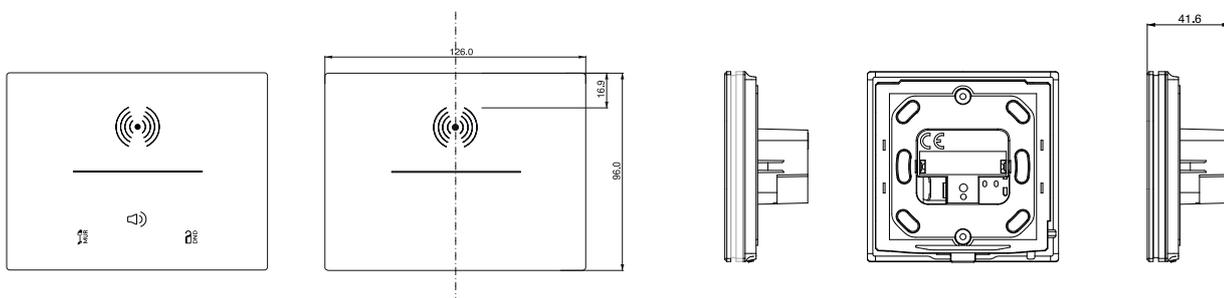

**KNX Transponder Holder**



**TH00C01KNX-1-3M**  
Transponder Holder with 3 control  
buttons 3 Modules - White



**TH00C01KNX-3-3M**  
Transponder Holder with 3 control  
buttons 3 Modules - Black

**Transponder Holder Covers | RGB Line Series**



**9025PTH303L01**  
Single plexiglass - 3 Modules - White



**9025PTH303L03**  
Single plexiglass - 3 Modules - Black



**9025GTH303L01**  
Single glass - 3 Modules - White



**9025GTH303L03**  
Single glass - 3 Modules - Black

# 9025 Access Control

## KNX TRANSPONDER ENCODER

It is a USB desktop device compatible with USB-HID specification.

It is a device designed to program cards or RFID devices used for Eelectron access control.

No drivers are required to use this device with the dedicated software module.

It's powered by the PC USB port to which is connected.



### Order Codes

#### TE00C01USB

Transponder Encoder USB - Black


### Technical Features

#### Mechanical data

- Case: plastic (PC-ABS) / Aluminum
- Dimensions: (W x H x D): 96 x 98 x 100 mm
- Weight: ca. 320 g.

#### Power Supply

- Via bus USB: 5 V DC
- Current Consumption: max 160 mA @ 5 V

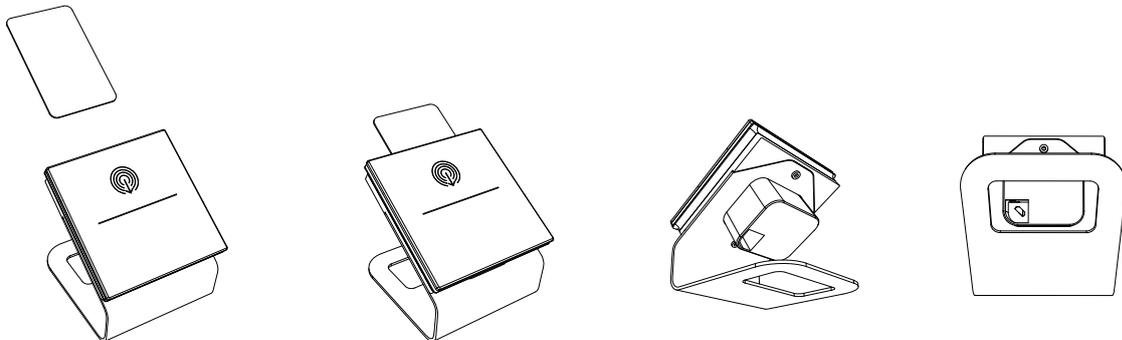

# MIFARE Accessories

## TRANSPONDER CARD MIFARE 1K

The card CD00M01TRC is based on MIFARE 1K Classic technology,



## TRANSPONDER FITBAND MIFARE 1K

CD00M04TRB is a wristband, in polyurethane, with a unique and modern design.

Comfortable, water resistant and easy to wear, the case of this product can be customized with silkscreen colour printing, and epoxy.

Ideal for access control in recreational clubs, amusement parks, spa and swimming pools, it is available in black, blue, pink and yellow.



## TRANSPONDER KEYHOLDER MIFARE 1K

The keyholder CD00M02TRK is based on MIFARE 1K Classic technology.



## Technical Features

<b>RFID Features</b>	<ul style="list-style-type: none"> <li>• Frequency: 13.56 MHz</li> </ul>
<b>Chip</b>	<ul style="list-style-type: none"> <li>• IC type: MIFARE 1K Classic EV1 (Type 4)</li> <li>• Memory size: 1024 Byte</li> <li>• UID: 4 or 7 Byte</li> <li>• Standard protocol: ISO 14443A</li> <li>• Reading distance: Up to 5 cm (dep. upon the reader)</li> </ul>
<b>Mechanical data</b>	<p><b>Card</b></p> <ul style="list-style-type: none"> <li>• Dimensions: (mm): 86x54</li> <li>• Material: PVC</li> </ul> <p><b>Fitband</b></p> <ul style="list-style-type: none"> <li>• Size (mm): 205x15   ø 55</li> <li>• Weight (g): 19</li> <li>• Material housing: Polyurethane</li> </ul> <p><b>Keyholder</b></p> <ul style="list-style-type: none"> <li>• Size (mm): 40.5x32x4.2</li> <li>• Weight (g): 6</li> <li>• Material housing: ABS</li> <li>• Attachment: Key ring</li> </ul>
<b>Customization:</b>	<p><b>Card</b></p> <ul style="list-style-type: none"> <li>• Printing: silkscreen color print, digital print, offset print, thermal printing</li> <li>• Colour: white</li> </ul> <p><b>Fitband</b></p> <ul style="list-style-type: none"> <li>• Printing: silkscreen color print, and epoxy</li> <li>• Colour: black, blue, pink, yellow</li> </ul> <p><b>Keyholder</b></p> <ul style="list-style-type: none"> <li>• Printing: epoxy, silkscreen color print</li> <li>• Colour: blue, black, green, grey, yellow, red, white</li> </ul>

## Order Codes

### CD00M02TRC

Transponder Card MIFARE 1K - 50 pcs. White

### CD00M03TRC

Transponder Card MIFARE 1K - 200 pcs. White

### CD00M02TRK

Transponder Keyholder MIFARE 1K 50 pcs.

### CD00M04TRB

Transponder Wearable (bracelet) MIFARE 1K - 50 pcs.

### CD00Q02TRC

Transponder Combo Card - MIFARE 1K 125 KHz - 50 pcs. - White

### CD00Q03TRC

Transponder Combo Card - MIFARE 1K 125 KHz - 200 pcs. - White

### CD00A02TRC

Transponder Card - 125 KHz - 50 pcs. White

### CD00A03TRC

Transponder Card - 125 KHz - 200 pcs. White

### CD00B02KNX

Transponder Card - 125 KHz - 50 pcs.

# 9025 Access Control

## KNX NUMERIC KEYPAD



The 9025 KNX® numeric keypad dedicated to access control management consists of 10-channel capacitive buttons. The product can be installed with glass covers, white or black, which show the numbers from 0 to 9 which can be backlit. Device includes a 2 stage Room Temperature Controller with integrated PI to control heating and cooling equipments, valves, 2 and 4 pipes fan coils; etc.. Device has an embedded temperature sensor and a rear 2 poles connector configurable as digital or analog input; It's possible to connect an additional NTC temperature probe (eelectron codes TS01A01ACC or TS01B01ACC - not included) to perform a direct temperature measurement. The device includes an RGB LED bar on the front side of the numeric keypad in order to visualize the recognition of the entered code and shows different colors (configurable) for status or anomalies reporting such as:

- Password recognized (welcome): default Green color
- Incorrect system code: default color Orange
- Password not recognized: default color Red
- Incorrect Date Password (validity expired): default color Yellow
- Wrong time of day (Entry prohibited time): default color Magenta
- Wrong day of the week (Entry prohibited day): default color Blue-Cyan

The numeric keypad also integrates a buzzer that can be enabled or disabled in order to give acoustic feedback when a key is pressed.

The 9025 KNX® numeric keypad is mounted in 2 or 3 modules box and is compliant with main standards (British, German, Italian, etc).

Device is equipped with KNX communication interface.

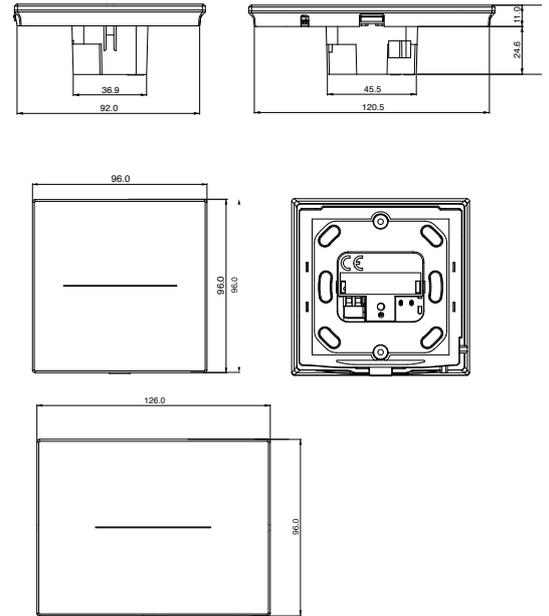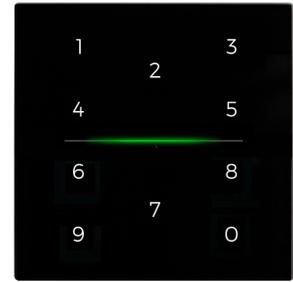

### Technical Features

<b>Mechanical data</b>	<ul style="list-style-type: none"> <li>• Dimensions (2 modules): (W x H x D): 96 x 96 x 36 mm</li> <li>• Dimensions (3 modules): (W x H x D): 126 x 96 x 36 mm</li> </ul>
<b>Mounting</b>	<ul style="list-style-type: none"> <li>• British box, German box or Italian 2 or 3 modules box</li> </ul>
<b>Supply</b>	<ul style="list-style-type: none"> <li>• Via bus USB: 5 V DC</li> <li>• max 20 mA @ 29V</li> <li>• max 24 mA @ 21V</li> <li>• (economy mode) max 12 mA @ 29V</li> </ul>
<b>Rear Input - digital mode</b>	<ul style="list-style-type: none"> <li>• For free potential contacts (dry contacts)</li> <li>• Max. length of Connecting Cables ≤ 10 m (twisted cable)</li> <li>• Voltage Scanning: 3,3 V DC (internally generated)</li> </ul>
<b>Rear input - analog mode for temperature probe</b>	<p>For NTC temperature probe eelectron code:</p> <ul style="list-style-type: none"> <li>• TS01A01ACC (range from -20°C to +100°C)</li> <li>• TS01B01ACC (range from -50°C to +60°C)</li> <li>• TS01D01ACC (range from -40°C to 125°C)</li> <li>• Max. length of Connecting Cable: ≤ 30 m (twisted cable)</li> </ul>

### Order Codes

- KP10C01KNX-1**  
KNX capacitive numeric keypad for access control - White
- KP10C01KNX-3**  
KNX capacitive numeric keypad for access control - Black
- KP10C01KNX-1-3M**  
KNX capacitive numeric keypad for access control 3 Modules - White
- KP10C01KNX-3-3M**  
KNX capacitive numeric keypad for access control - 3 Modules - Black
- 9025GKP10L01**  
Single Glass Cover - White
- 9025GKP10L03**  
Single Glass Cover - Black
- 9025GKP310L01**  
Single Glass Cover - 3 Modules - White
- 9025GKP31L03**  
Single Glass Cover - 3 Modules - Black

**KNX Capacitive Switch Boards**



**KP10C01KNX-1**  
KNX capacitive numeric keypad for access control - White



**KP10C01KNX-3**  
KNX capacitive numeric keypad for access control - Black



**KP10C01KNX-1-3M**  
KNX capacitive numeric keypad for access control 3 modules - White



**KP10C01KNX-3-3M**  
KNX capacitive numeric keypad for access control - 3 moduli - Black

**Numeric Keypad Covers | RGB Line Series**




**9025GKP10L01**  
Single Glass Cover - White



**9025GKP10L03**  
Single Glass Cover - Black



**9025GKP310L01**  
Single Glass Cover - 3 Modules - White

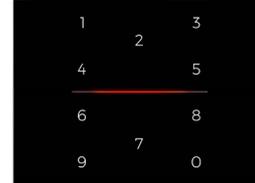



**9025GKP310L03**  
Single Glass Cover - 3 Modules - Black

# 9025

## BEDSIDE PANEL

9025 custom Bedside Panel includes the features of the Standard 9025 switch: consists of 2 – 4 – 8 – 10 channels capacitive buttons. Each button can be configured to manage on/off commands, dimming, shutters and venetians control, scene recall and control, objects sequences etc; device includes a 2 stage Room Temperature Controller with integrated PI to control heating and cooling equipments, valves, 2 and 4 pipes fan coils; etc. Device has an embedded temperature sensor and a rear 2 poles connector configurable as digital or analog input; It's possible to connect an additional NTC temperature probe (electron codes TS01A01ACC - TS01B01ACC – TS01D01ACC not included) to perform a direct temperature measurement.

The glass bedside panel, as in the CUSTOM version of the 9025 series, has the possibility of back lighting custom and interchangeable icons matching with the associated function. The product is intended to fulfill the request of the hotel market including high possibility of customization through dedicated icons set, two sockets (not included) and a minimal elegant design.

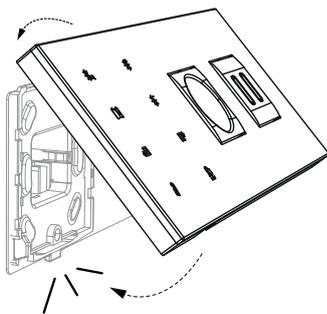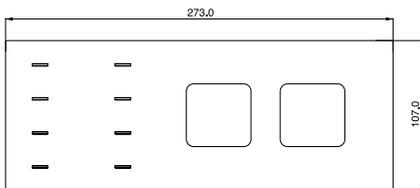

### Order Codes

#### KNX Capacitive Switch Boards

##### CS05B01KNX-1

KNX Capacitive switch - White

##### CS05B01KNX-3

KNX Capacitive switch - Black

#### Bedside Panel Plate

##### 9025GL10C01-B2R

Custom Bedside Panel Plate - 2 Sockets - Right White

##### 9025GL10C03-B2R

Custom Bedside Panel Plate - 2 Sockets - Right Black

##### 9025GL10C01-B2L

Custom Bedside Panel Plate - 2 Sockets - Left White

##### 9025GL10C03-B2L

Custom Bedside Panel Plate - 2 Sockets - Left Black

**KNX Capacitive Switch Boards**



**CS10A01KNX-1**  
Capacitive switch KNX - White



**CS10A01KNX-3**  
Capacitive switch KNX - Black

**Custom Bedside Panel Plate**



**9025GL10C01-B2R**  
Custom bedside panel plate – 2 sockets -  
Right - White



**9025GL10C03-B2R**  
Custom bedside panel plate – 2 sockets -  
Right - Black



**9025GL10C01-B2L**  
Custom bedside panel plate – 2 sockets -  
Left - White



**9025GL10C03-B2L**  
Custom bedside panel plate – 2 sockets -  
Left - Black

# 9025 Access Control

## DOOR PANEL

The KNX® 9025 capacitive doorpanel is a capacitive switch with RGB led bar; it is used in combination with the glass covers available in black or white; these cover glasses can be ordered in a specific version for the required application. The upper part of the glass can have a personalized, backlit room number; the lower part provides a key for the bell function, one for the 'do not disturb' function (DND) and one for the 'make up room' function (MUR). 2 other buttons customizable on request are available. Device includes a 2 stage Room Temperature Controller with integrated PI to control heating and cooling equipments, valves, 2 and 4 pipes fan coils; etc. Device has an embedded temperature sensor and a rear 2 poles connector configurable as digital or analog input; It's possible to connect an additional NTC temperature probe (eelectron codes TS01A01ACC - TS01B01ACC – TS01D01ACC not included) to perform a direct temperature measurement. Device has a RGB led bar on the front side in order to visualize feedbacks or other values available over the KNX bus (function available on the RGB range).



## Order Codes

### KNX Capacitive Switch Boards

#### CS05B01KNX-1

KNX Capacitive switch - White

#### CS05B01KNX-3

KNX Capacitive switch - Black

### Door Panel Covers

#### 9025GL03P01

Door panel 2 ch. - White + RGB

#### 9025GL03P03

Door panel 2 ch. - Black + RGB

## Technical Features

<b>Mechanical data</b>	<ul style="list-style-type: none"> <li>• Dimensions: (W x H x D) 96 x 96 x 36 mm</li> </ul>
<b>Mounting</b>	<ul style="list-style-type: none"> <li>• British box, German box or Italian 2 modules box</li> </ul>
<b>Rear Input - digital mode</b>	<ul style="list-style-type: none"> <li>• For free potential contacts (dry contacts)</li> <li>• Max. length of Connecting Cables ≤ 10 m (twisted cable)</li> </ul>
<b>Rear input - analog mode for temperature probe</b>	<p>For NTC temperature probe eelectron code:</p> <ul style="list-style-type: none"> <li>• TS01A01ACC (range from -20°C to +100°C)</li> <li>• TS01B01ACC (range from -50°C to +60°C)</li> <li>• TS01D01ACC (range from -40°C to 125°C)</li> <li>• Max. length of Connecting Cable: ≤ 20 m (twisted cable)</li> </ul>

---

**KNX Capacitive Switch Boards**



**CS05B01KNX-1**  
KNX Capacitive switch door panel - White



**CS05B01KNX-3**  
KNX Capacitive switch door panel - Black

---

**Door Panel RGB Line Covers**



**9025GL03P01**  
Door panel 2 ch. - Single glass - White + RGB  
DND/MUR + Bell



**9025GL03P03**  
Door panel 2 ch. - Single glass - Black + RGB  
DND/MUR + Bell

# Transponder Reader


The Synchronicity series devices dedicated to access control management are KNX devices and use RFID - MIFARE® technology.

The transponder is read by placing it in front of the reader, at a maximum distance of 20 mm; in the case of the transponder pocket, the card is inserted into a compartment from the top of the device.

The Synchronicity KNX range is mounted in 2 or 3 modules box and is compliant with main standards (British, German, Italian, etc).

Device is equipped with KNX communication interface.

The AC22D01KNX-3 external card reader is an EIB/KNX device dedicated to access control.

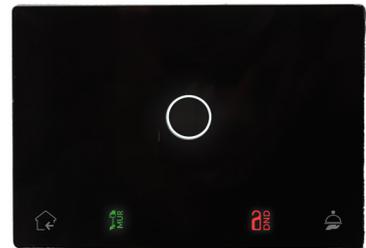

## Technical Features

<b>Mechanical data</b>	<ul style="list-style-type: none"> <li>• Dimensions: (W x H x D) 96 x 96 x 36 mm</li> </ul>
<b>Mounting</b>	<ul style="list-style-type: none"> <li>• British box, German box or Italian 2/3 modules box</li> </ul>
<b>Supply</b>	<ul style="list-style-type: none"> <li>• Via bus EIB/KNX cable: 21 ÷ 32 Vdc</li> <li>• Supplementary 12 ÷ 24 Vac/dc ± 10% 150 mA Max</li> </ul>
<b>Rear Input - digital mode</b>	<ul style="list-style-type: none"> <li>• For free potential contacts (dry contacts)</li> <li>• Max. length of Connecting Cables ≤ 10 m (twisted cable)</li> </ul>
<b>Output rate</b>	<ul style="list-style-type: none"> <li>• Max load 24 Vac/dc, 2 A</li> </ul>

## Order Codes

**TR22D01KNX-1**  
Transponder reader 13.5MHz - White

**TR22D01KNX-3**  
Transponder reader 13.5MHz - Black

**AC22D01KNX-3**  
Outdoor transponder reader 13.5MHz, 2IN/2OUT - Black

**PX10A24ACC**  
Plexi plate for Outdoor reader - White

**PX15A14ACC**  
Plexi plate for Outdoor reader - Black

# Transponder Holder

The Synchronicity series devices dedicated to access control management are KNX devices and use RFID - MIFARE® technology.

The products are intended to be installed with the plexiglass covers which can be customized on request.

The transponder is read by placing it in front of the reader, at a maximum distance of 20 mm; in the case of the transponder pocket, the card is inserted into a compartment from the top of the device.

The Synchronicity KNX range is mounted in 2 or 3 modules box and is compliant with main standards (British, German, Italian, etc).

Device is equipped with KNX communication interface.



## Technical Features

<b>Mechanical data</b>	<ul style="list-style-type: none"> <li>• Dimensions: (W x H x D) 96 x 96 x 36 mm</li> </ul>
<b>Mounting</b>	<ul style="list-style-type: none"> <li>• British box, German box or Italian 2/3 modules box</li> </ul>
<b>Supply</b>	<ul style="list-style-type: none"> <li>• Via bus EIB/KNX cable: 21 ÷ 32 Vdc</li> <li>• Supplementary 12 ÷ 24 Vac/dc ± 10% 150 mA Max</li> </ul>
<b>Rear Input - digital mode</b>	<ul style="list-style-type: none"> <li>• For free potential contacts (dry contacts)</li> <li>• Max. length of Connecting Cables ≤ 10 m (twisted cable)</li> </ul>
<b>Output rate</b>	<ul style="list-style-type: none"> <li>• Max load 24 Vac/dc, 2 A</li> </ul>

## Order Codes

**TH22D01KNX-1**  
Transponder holder 13.5Mhz - White

**TH22D01KNX-3**  
Transponder holder 13.5Mhz - Black

# eSuite Software

eSuite software is dedicated for hotel management, for the supervision of KNX environments, access control and alarms. The software can be interfaced with BMS. Client remote management can be done via Internet or Ethernet. The package is available with Embedded PC including 2 clients.

## Technical Features

- Number of pages according to installed license.
- Number of clients according to installed license
- Up to 10 profiling groups
- Unlimited users
- Advanced ETS project data import
- Interfaced to third parties PMS
- Timer management
- Alarms management



## Order Codes

### SW01F11ACS

Embedded pc with eSuite sw – full package – 0 clients - closed license - 10 Rooms

### SW01F01ACS

Embedded pc with eSuite sw – full package – 2 clients - start up license

### SW01F10ACS

Embedded pc with eSuite sw – license – cost per single room

### SW07D05KNX

Embedded rack pc with eSuite sw - full package – 2 clients - start up license

### SW00D03KNX

eSuite additional client

### SW00D04KNX

eSuite interface to management system

### SW00D04DVL

eSuite connectivity to PMS custom development




### SW00D06KNX

eSuite connectivity to Horizone & Virtual Badge applications


### SW00T05KNX

eSuite IP (tunneling) module/unit price per IP node

## eSuite Staff Experience for Staff daily operations

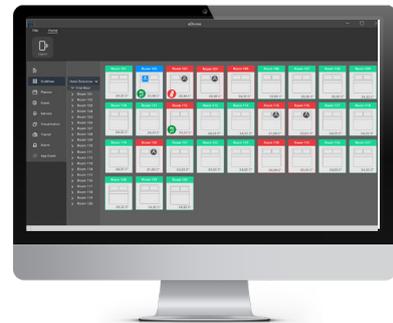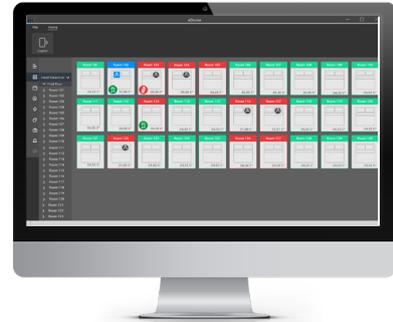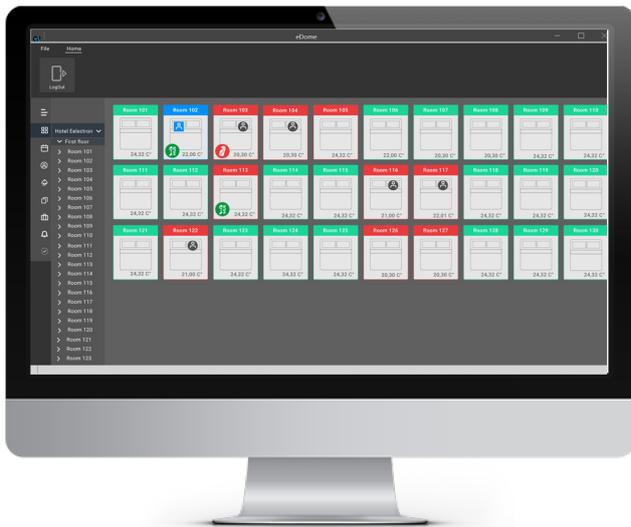

## Hotel Backoffice Applications Connectivity

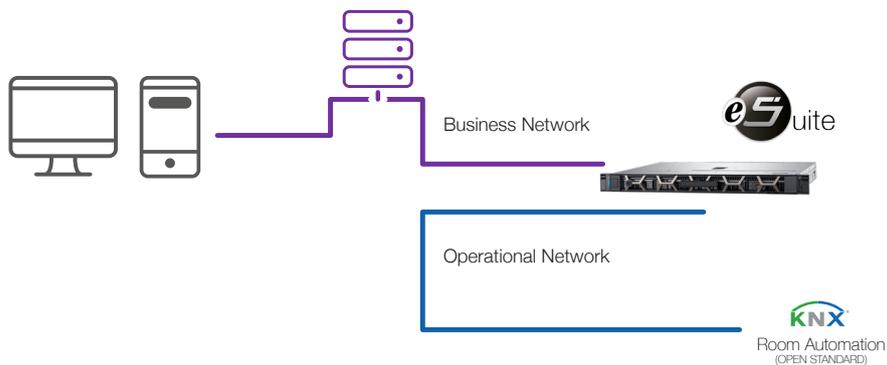

- Property Management Systems
- E-Lock Servers or in room applications
- Other IP related services

# 55x55 KNX Switch

## 4 CHANNELS + THERMOSTAT

SB40AxxKNX is a KNX tactile 4 channels push button which can be configured to manage on/off commands, dimming, shutters and venetians control, scene recall and control, sequences of 3 objects, etc. Device includes a 2 stage Room Temperature Controller with integrated PI to control heating and cooling equipments, valves, 2 and 4 pipes fan coils, etc. Device has a rear connector (2 poles) configurable as digital or analog input. It's possible to connect a NTC temperature probe (eelectron codes TS01A01ACC - TS01B01ACC - TS01D01ACC not included) to have a direct temperature measurement. SB40AxxKNX has a RGB led bar on the front side in order to visualize feedbacks or other values available over the KNX bus. SB40AxxKNX is intended to be used in British box, German box or Italian 2 modules box. Device is equipped with KNX communication interface.



### Order Codes

#### SB40A01KNXPLCR

Knx switch 4 channels + Thermostat  
55x55mm - Chromo - Plastic

#### SB40A11KNXPLBL

Knx switch 4 channels + Thermostat  
55x55mm - Black - Plastic

#### SB40A21KNXPLWH

Knx switch 4 channels + Thermostat  
55x55mm - White - Plastic

#### SB40A09KNXPLCR

Knx switch 4 channels + Thermostat  
55x55mm - Chromo - Plastic + Linemark

#### SB40A19KNXPLBL

Knx switch 4 channels + Thermostat  
55x55mm - Black - Plastic + Linemark

#### SB40A29KNXPLWH

Knx switch 4 channels + Thermostat  
55x55mm - White - Plastic + Linemark



#### SB40A01KNXMT60

Knx switch 4 channels + Thermostat  
55x55mm - Chromo + Alluminium

(Order codes are referred only to switches without frames).

### Technical Features

<b>Mechanical data</b>	<ul style="list-style-type: none"> <li>Dimensions: (H x W x D) : 55 x 55 x 37 mm</li> </ul>
<b>Mounting</b>	<ul style="list-style-type: none"> <li>British box, German box or Italian 2 modules box</li> </ul>
<b>Supply</b>	<ul style="list-style-type: none"> <li>Via bus EIB/KNX cable: 21 ÷ 32 Vdc</li> </ul>
<b>Rear Input - digital mode</b>	<ul style="list-style-type: none"> <li>For free potential contacts (dry contacts)</li> <li>Max. length of Connecting Cables ≤ 10 m (twisted cable)</li> </ul>
<b>Rear input - analog mode for temperature probe</b>	<p>For NTC temperature probe eelectron code:</p> <ul style="list-style-type: none"> <li>TS01A01ACC (range from -20°C to +100°C)</li> <li>TS01B01ACC (range from -50°C to +60°C)</li> <li>TS01D01ACC (range from -40°C to 125°C)</li> <li>Max. length of Connecting Cable: ≤ 20 m (twisted cable)</li> </ul>

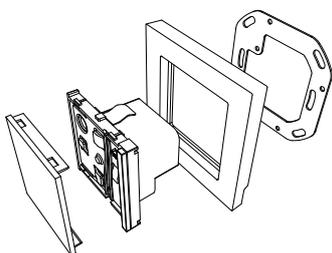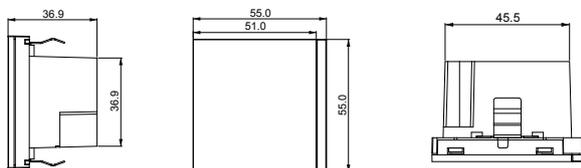

Plastic

---



Chromo  
SB40A01KNX-PLCR



Black  
SB40A11KNX-PLBL



White  
SB40A21KNX-PLWH

Plastic + Linemark

---



Chromo  
SB40A09KNX-PLCR



Black  
SB40A19KNX-PLBL



White  
SB40A29KNX-PLWH

Metal

---



Aluminium  
SB40A01KNX-MT60

# 9025 KNX Touch Panel 3,5"

EVO21

The touch panel is equipped with a 3,5 inches coloured display; dimming, status, values, lighting, shutters and timers are controlled and password protected when needed. Using the embedded temperature sensor and the embedded room temperature controller function is possible to manage valves, fancoil or other HVAC equipments. The device includes a number of pre-programmed logic including control of electrical loads with automatic power-off priority, (this feature is available in combination with eelectron KNX power measuring device). The panel 3.5 "Touch has an LED for status display and a buzzer to give sound signals with alarm function.

The device is equipped with a Micro-USB connection accessible from the front by simply removing the external cover; allows connection to the programming device for customizing icons, screensavers or logics. Similarly, a Micro-SD Card slot is available for updating the device's firmware. Available in two colours (white and black) is based on Linux OS but can be programmed using only ETS without any additional SW.

Device is equipped with KNX communication interface






## Technical Features

<b>Mechanical data</b>	<ul style="list-style-type: none"> <li>• Dimensions: (W x H x D) : 96 x 96 x 15 mm</li> </ul>
<b>Mounting</b>	<ul style="list-style-type: none"> <li>• Inwall box: 2 modules Italian, German box, Swiss box</li> </ul>
<b>Supply</b>	<ul style="list-style-type: none"> <li>• Via bus EIB/KNX cable: 21 ÷ 32 Vdc</li> <li>• Auxiliary power supply: 9 ÷ 32 Vdc</li> <li>• Current Consumption (Aux): 55 mA @24 Vdc</li> </ul>

## Order Codes

**TP35A01KNX-1**  
 Touch Panel KNX 3,5 EVO21 - White

**TP35A01KNX-3**  
 Touch Panel KNX 3,5 EVO21 - Black

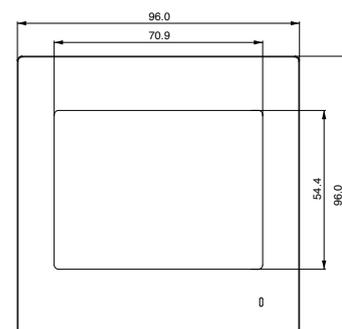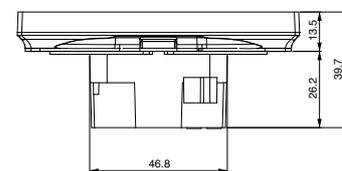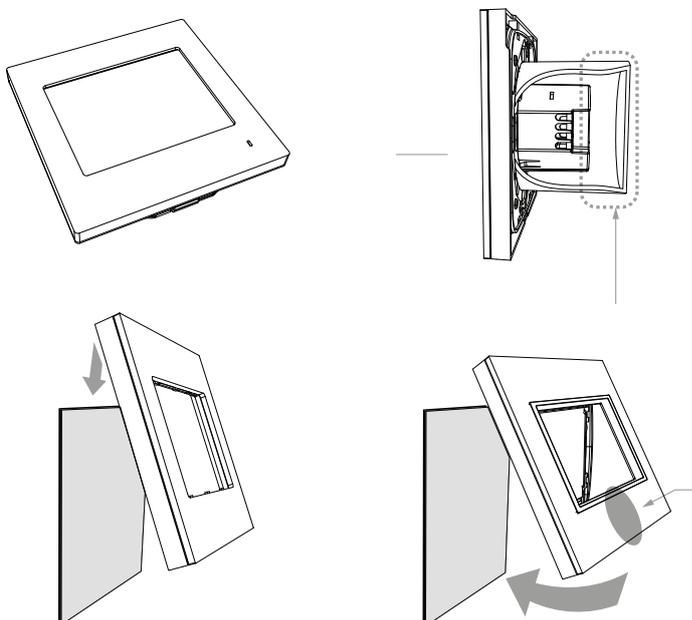

# eelecta KNX Touch Panel 3,5"

The Eelecta touch panel: powerful control in a distinctive shape. With a coloured display, dimming, status, values, lighting, shutters and timers are controlled and password protected when needed. Using the embedded temperature sensor, chrono or fancoil controlling functions are managed. DMX coloured Led or lights are controlled with the optional DMX interface, and load control with automatic cut off of prioritized functions is performed with the available power meter. Based on Linux® OS but Ets programmed, the 3.5" touch panel has Led indicator for status display and an audio signal for alarm functions and is available in three colours.



## Technical Features


<b>Mechanical data</b>	<ul style="list-style-type: none"> <li>• Dimensions: (H x W x D) : 113 x 113 x 48mm</li> </ul>
<b>Mounting</b>	<ul style="list-style-type: none"> <li>• Inwall box: 2 or 3 modules Italian, German box, Swiss box</li> </ul>
<b>Supply</b>	<ul style="list-style-type: none"> <li>• Via bus EIB/KNX cable: 21 ÷ 32 Vdc</li> <li>• Auxiliary power supply: 9 ÷ 32 Vdc</li> <li>• Current Consumption (Aux): 55 mA @24 Vdc</li> </ul>

## Order Codes

**VS00E10KNX**  
Touch Panel KNX 3,5 + Thermostat  
Ceramic White

**VS00E20KNX**  
Touch Panel KNX 3,5 + Thermostat  
Chromo

**VS00E30KNX**  
Touch Panel KNX 3,5 + Thermostat  
Black Matte

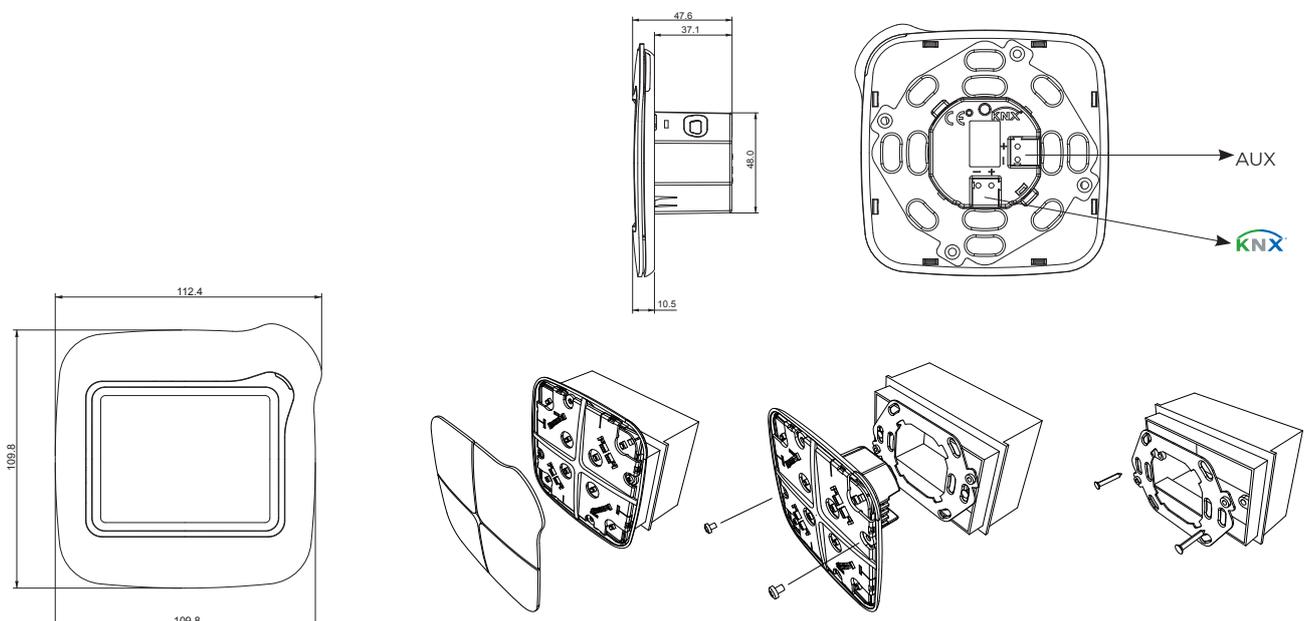

# 3025 KNX Touch Panel 3,5"

SQUARE



The 3025 Touch Panel: powerful control in a distinctive shape. With a coloured display, dimming, status, values, lighting, shutters and timers are controlled and password protected when needed. Using the embedded temperature sensor, chrono or fancoil controlling functions are managed. DMX coloured Led or lights are controlled with the optional DMX interface, and load control with automatic cut off of prioritized functions is performed with the available power meter. Based on Linux® OS but Ets programmed, the 3,5" Touch Panel has Led indicator for status display and an audio signal for alarm functions and is available in three colours.

## Technical Features

<b>Mechanical data</b>	<ul style="list-style-type: none"> <li>• Dimensions: (H x W x D): 113 x 113 x 48 mm</li> </ul>
<b>Mounting</b>	<ul style="list-style-type: none"> <li>• British box, German box or Italian 2 or 3 modules box</li> </ul>
<b>Supply</b>	<ul style="list-style-type: none"> <li>• Via bus EIB/KNX cable: 21 ÷ 32 Vdc</li> <li>• Auxiliary power supply: 9 ÷ 32 Vdc</li> </ul>

## Order Codes

### VS00G10KNX

Touch Panel KNX 3,5 SQUARE  
White Glass

### VS00G11KNX

Touch Panel KNX 3,5 SQUARE  
Ice White Glass

### VS00G30KNX

Touch Panel KNX 3,5 SQUARE  
Black Glass

### VS00P10KNX

Touch Panel KNX 3,5 SQUARE  
Plexi Glass

### VS00P20KNX

Touch Panel KNX 3,5 SQUARE  
Plexi Chromo

### VS00P15KNX

Touch Panel KNX 3,5 SQUARE  
Plexi Black

### VS00W60KNX




Touch Panel 3,5" SQUARE  
Metal

### VS00W50KNX

Touch panel 3,5" SQUARE  
Oak White

### VS00W51KNX

Touch panel 3,5" SQUARE  
Oak Black

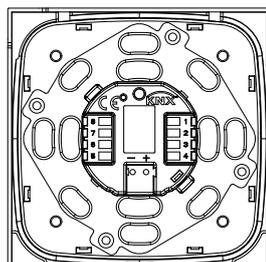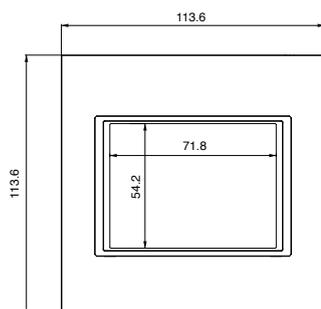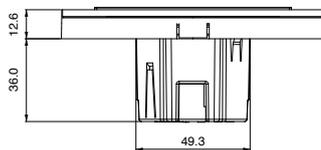

Plexiglass

---



White  
VS00P10KNX



Black  
VS00P15KNX

Glass

---



White  
VS00G10KNX



Black  
VS00G30KNX

# MiniPad Evo21

Eeecta® Minipad pushbutton range of KNX devices is divided in 4 different models based on the number of switch, input and temperature sensors provided with the device. Product has 4 (8) push buttons which can be configured to manage lights, dimmers, shutters, etc; and 4 inputs (where present) on the backside to interface free potential contacts (for example sensors, traditional buttons, etc.) It has 5 white led in the front side, each led freely configurable by ets and 2 versions have a temperature sensor included which can be configured as a room thermostat.

The device is equipped with appropriate communication interface with the bus type TP1 (twisted pair) KNX European standard, according CEI EN 50090.



## Order Codes

### MB40B1FKNX-WH

4 channels KNX - White Ceramic

### MB80C1FKNX-WH

8 channels KNX - TS/ Circular functions - White Ceramic

### MB40B3FKNX-BL









4 channels KNX - Black Matte

### MB80C3FKNX-BL

8 channels KNX - TS/ Circular functions - Black Matte

## Technical Features

<b>Mechanical data</b>	<ul style="list-style-type: none"> <li>• Dimensions (H. x W.) 90 x 90 mm</li> </ul>
<b>Mounting</b>	<ul style="list-style-type: none"> <li>• Inwall box: 2 modules Italian, German box, Swiss box</li> </ul>
<b>Supply</b>	<ul style="list-style-type: none"> <li>• Via bus EIB/KNX cable: 21 ÷ 32 Vdc</li> </ul>
<b>Rear Input - digital mode</b>	<ul style="list-style-type: none"> <li>• For free potential contacts (dry contacts)</li> <li>• Max. length of Connecting Cables <math>\leq</math> 10 m (twisted cable)</li> </ul>

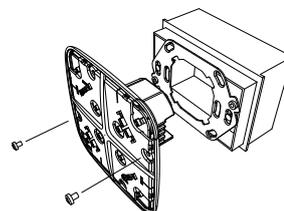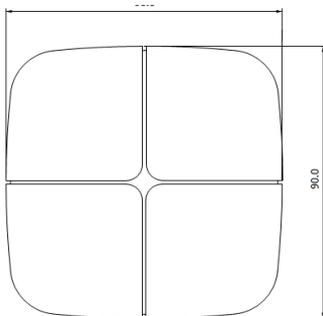

Linear Cover

---



Ceramic White-  
COAW



Black Matte  
COAA

MiniPad

---



Ceramic White - Opaline Center  
1A - WH



Black Matte - Opaline Center  
3C - BL

# Horizone Web Server

HORIZONE is a webservice specifically engineered for supervision and monitoring of Home & Building Automation systems. Based on KNX standard and suitable for integration with Modbus standard and other technologies used in intelligent buildings, alarm systems, fire and smoke detections systems, audio/video distribution systems. Compatible with operating system Mac OS X, Microsoft Windows, Apple iOS and Google Android, the configuration and use of HORIZONE takes place directly through its web interface, which can be accessed through the most popular browser on the market browser from any device (pc/mac, smartphone e tablet) or with free app available on iOS and Android store.



## SIZES

	KNX GROUP ADDRESSES	SCENES	LOGICS	PAGES	LOADS
Horizone Web Server 200 KNX group addresses	200	30	30	UNLIMITED	10
Upgrade up to 800 KNX group addresses	800	100	100	UNLIMITED	20
Upgrade up to 1400 KNX group addresses	1400	100	100	UNLIMITED	40

\*\*On demand Horizone Upgrade over 1400 KNX group addresses

## Order Codes

**IN00B02WEB**  
Web Server Horizone 200 points

**IN00B03UPG**  
Upgrade up to 800 points

**IN00B04UPG**  
Upgrade up to 1400 points

## Hardware Features

<b>Mechanical data</b>	<ul style="list-style-type: none"> <li>Dimensions: 5 DIN modules</li> </ul>
<b>Supply</b>	<ul style="list-style-type: none"> <li>Via bus EIB/KNX cable: 21 ÷ 32 Vdc</li> </ul>
<b>Aux Supply</b>	<ul style="list-style-type: none"> <li>12 ÷ 24 Vdc</li> <li>18 mA @12 V; 110 mA @24 V</li> </ul>
<b>Communication ports</b>	<ul style="list-style-type: none"> <li>KNX</li> <li>RS232 (1x) Screw connector</li> <li>RS485 (1x) Screw connector</li> <li>USB 2.0 (2x)</li> <li>LAN (1x) RJ-45 jack (10/100 Mbps)</li> </ul>


## Additional Software Modules

<b>IN00B02MBS</b>	<ul style="list-style-type: none"> <li>MODBUS Module for HORIZONE WS</li> </ul>
<b>IN00B02BEN</b>	<ul style="list-style-type: none"> <li>BENTEL Module for HORIZONE WS</li> </ul>
<b>IN00B02IES</b>	<ul style="list-style-type: none"> <li>ELMO/IESS Module for HORIZONE WS</li> </ul>
<b>IN00B02TEC</b>	<ul style="list-style-type: none"> <li>TECNOALARM Module for HORIZONE WS</li> </ul>
<b>IN00B02TUT</b>	<ul style="list-style-type: none"> <li>TUTONDO Module for HORIZONE WS</li> </ul>
<b>IN00B02VIV</b>	<ul style="list-style-type: none"> <li>VIVALDI Module for HORIZONE WS</li> </ul>
<b>IN00B02VOI</b>	<ul style="list-style-type: none"> <li>VOIP Module for HORIZONE WS</li> </ul>
<b>IN00B02SON</b>	<ul style="list-style-type: none"> <li>SONOS Module for HORIZONE WS</li> </ul>
<b>IN00B02DAT</b>	<ul style="list-style-type: none"> <li>Report and Accounting Module for HORIZONE WS</li> </ul>

## Software Features

<b>Standard technologies</b>	<ul style="list-style-type: none"> <li>KNX</li> <li>RS232 / RS485 / TCP</li> </ul>
<b>User interface</b>	<ul style="list-style-type: none"> <li>Web / HTML5</li> <li>App iOS / Android</li> </ul>
<b>Number of clients</b>	<ul style="list-style-type: none"> <li>Unlimited</li> </ul>
<b>Simultaneous connections</b>	<ul style="list-style-type: none"> <li>Up to 20</li> </ul>
<b>Features</b>	<ul style="list-style-type: none"> <li>Lighting</li> <li>HVAC</li> <li>Blinds / Shutters</li> <li>Irrigation</li> <li>Alarms</li> <li>Power consumption</li> <li>Load management</li> <li>Weather</li> <li>IP Camera</li> <li>Door intercom system (with SIP standard)</li> <li>Cloud services</li> <li>Voice control</li> <li>IFTTT</li> </ul>
<b>Advanced functions</b>	<ul style="list-style-type: none"> <li>Scenarios with parametrical wait functions</li> <li>Boolean logics</li> <li>Thresholds and values comparators</li> <li>Mathematical operations</li> <li>Scheduler</li> <li>Notifications</li> <li>Advanced logic module</li> </ul>
<b>Users and security</b>	<ul style="list-style-type: none"> <li>Unlimited users</li> <li>SSL Internet secure access</li> </ul>

# Horizon Web Server

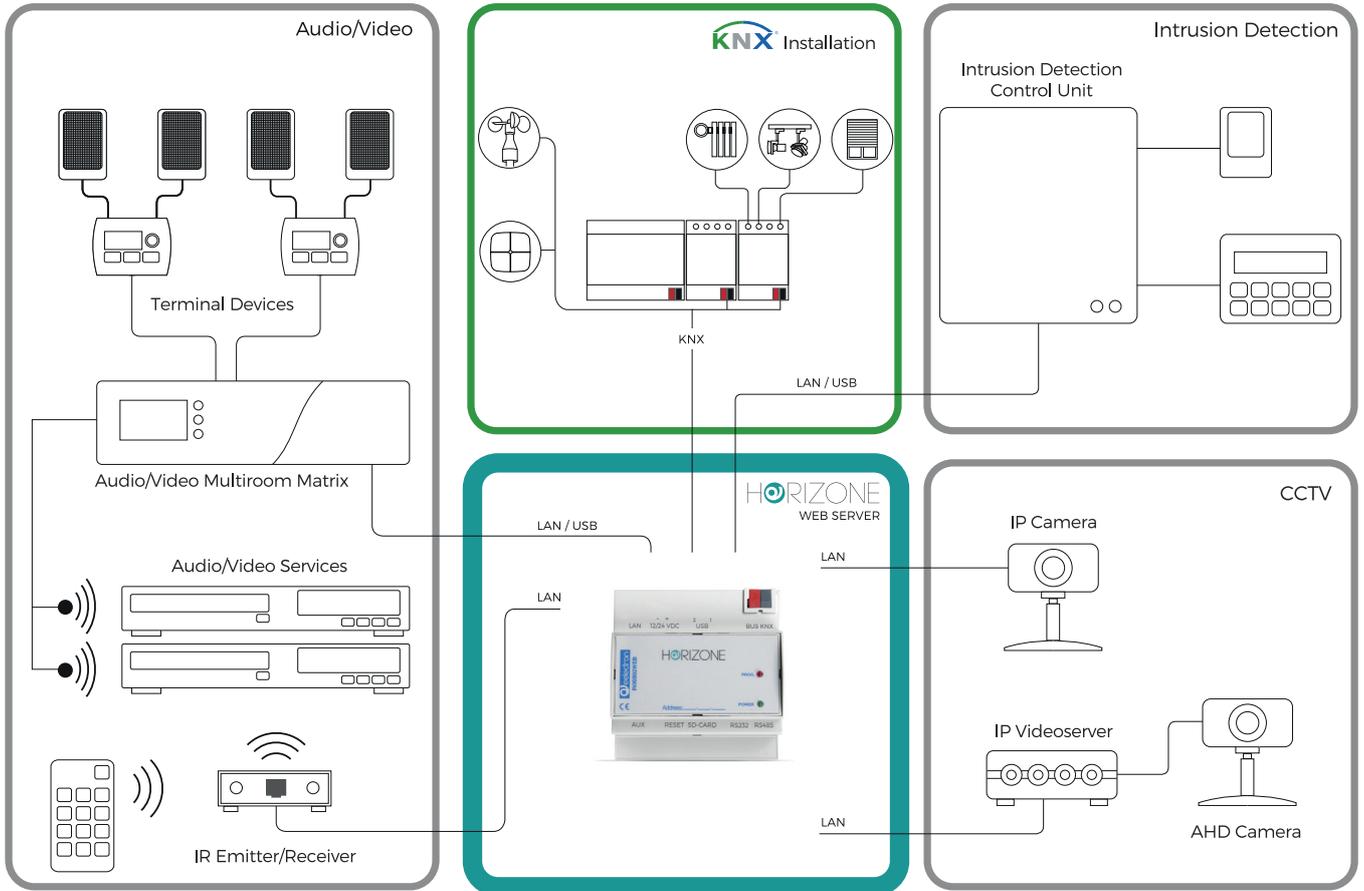

# Horizone Virtual Badge

Virtual Badge is an innovative access control system, which allows the opening of gates with your smartphone, without the need for keys or badge readers physically installed in front of each door. The management of permission of the users, and the sending of virtual access keys, is entirely manageable via app, both locally and remotely, and is therefore ideal also for unattended structures.



Virtual Badge




## Virtual Badge + Horizone Server

<b>Target</b>	<ul style="list-style-type: none"> <li>• Access Control</li> <li>• Home automation management</li> <li>• Integration of bus and technological systems</li> </ul>
<b>Technology</b>	<ul style="list-style-type: none"> <li>• KNX</li> <li>• Anti-Intrusion Systems *</li> <li>• Audio Systems *</li> <li>• IP cameras *</li> <li>• Modbus *</li> </ul>
<b>Room 1-4</b>	<ul style="list-style-type: none"> <li>• Horizone Web Server +</li> <li>• Virtual Badge License +</li> <li>• Other license if required</li> </ul>
<b>Every 4 room</b>	<ul style="list-style-type: none"> <li>• Additional Virtual Badge License</li> </ul>

## Order Codes

- IN00B02RAC-04**  
Access control module - 4 zones
- IN00B02RAC-08**  
Access control module - 8 zones
- IN00B02RAC-12**  
Access control module - 12 zones
- IN00B02RAC-16**  
Access control module - 16 zones
- IN00B02RAC-20**  
Access control module - 20 zones
- IN00B02RAC-24**  
Access control module - 24 zones
- IN00B02RAC-28**  
Access control module - 28 zones
- IN00B02RAC-30**  
Access control module - 30 zones
- IN00B02RAC-32**  
Access control module - 32 zones
- IN00B02RAC-34**  
Access control module - 34 zones
- IN00B02RAC-38**  
Access control module - 38 zones
- IN00B02RAC-40**  
Access control module - 40 zones

\* For compatibility list, see technical documentation for Horizone Web Server

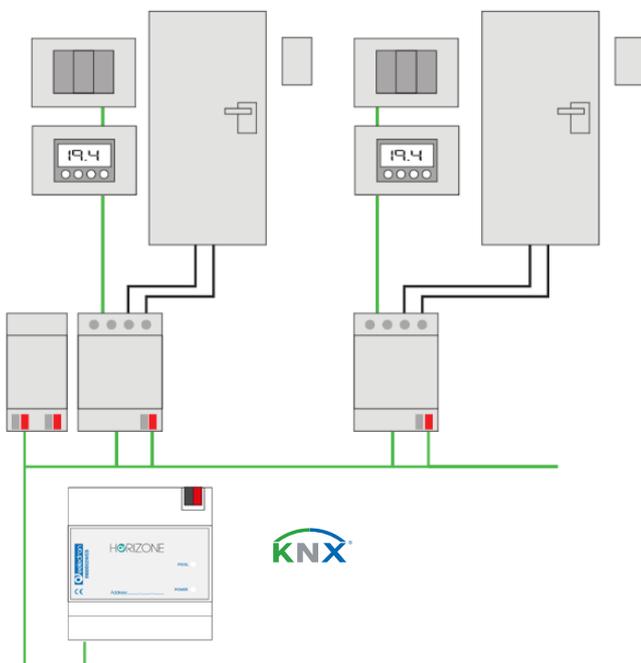

# Horizone MINI Web Server

HORIZONE MINI is a webserver specifically engineered for supervision and monitoring of Home & Building Automation systems. Based on KNX standard and suitable for integration with Modbus standard\*. Compatible with operating system Mac OS X, Microsoft Windows, Apple iOS and Google Android, the configuration and use of HORIZONE takes place directly through its web interface, which can be accessed through a the most popular browser on the market browser from any device (pc/mac, smartphone e tablet) or with free app available on iOS and Android store.

\*Only for Modbus energy meter



## Order Codes

**IN00M02WEB**  
Horizone MINI Web Server 200 points

## Software Features

<b>Standard technologies</b>	<ul style="list-style-type: none"> <li>• KNX (max 200 group addresses)</li> <li>• RS485 / TCP</li> <li>• Energy meter USB</li> </ul>
<b>User interface</b>	<ul style="list-style-type: none"> <li>• Web / HTML5</li> <li>• App iOS / Android</li> </ul>
<b>Number of clients</b>	<ul style="list-style-type: none"> <li>• Unlimited</li> </ul>
<b>Simultaneous connections</b>	<ul style="list-style-type: none"> <li>• Up to 20</li> </ul>
<b>Features</b>	<ul style="list-style-type: none"> <li>• Lighting</li> <li>• HVAC</li> <li>• Blinds / Shutters</li> <li>• Irrigation</li> <li>• Alarms</li> <li>• Energy management</li> <li>• Load management</li> <li>• Weather</li> <li>• Door intercom system (with SIP standard)</li> <li>• SONOS</li> <li>• Cloud services</li> <li>• Voice control</li> <li>• IFTTT</li> </ul>
<b>Advanced functions</b>	<ul style="list-style-type: none"> <li>• Scenarios with parametrical wait functions</li> <li>• Boolean logics</li> <li>• Thresholds and values comparators</li> <li>• Mathematical operations</li> <li>• Scheduler</li> <li>• Programmable events</li> <li>• Notifications</li> </ul>

## SIZES

	KNX GROUP ADDRESSES	SCENES	LOGICS	PAGES	LOADS
Horizone Web Server 200 KNX group addresses	200	30	30	12	10

## Hardware Features

<b>Dimensions</b>	<ul style="list-style-type: none"> <li>• 90,5 x 62 x 36 mm</li> <li>• 2 DIN rail Module</li> </ul>
<b>Aux Supply</b>	<ul style="list-style-type: none"> <li>• 12 ÷ 24 Vdc</li> <li>• 18 mA @12 V; 110 mA @24 V</li> </ul>
<b>Communication ports</b>	<ul style="list-style-type: none"> <li>• KNX</li> <li>• RS485 (1x) Screw connector</li> <li>• USB 2.0 (1x)</li> <li>• LAN (1x) RJ-45 jack (10/100 Mbps)</li> </ul>

# Energy Meter USB

## USB ENERGY METER

This is an indirect insertion single-phase energy meter for DIN rail mounting and the connection is made via USB with the Horizone webserver or Horizone Mini.

Through the user interface of the web server to which it is connected, it allows monitoring of the power, voltage and current relative to the point where it is mounted. Thanks to the amperometric clamp supplied, with opening insertion, it is possible to measure any electrical phase available in the electrical panel, without having to intervene directly in the relative wiring. To work requires a free USB port on the Horizone or Horizone Mini webserver.

## Order Codes

**PM10M01USB**  
USB Energy Meter

# IP Touch Panel 5"

Horizone IP Touch Panel is an Android based touch panel with a coloured 5" display in which can be installed third-party applications for the integration of different systems.





## Technical Features

<b>Dimensions:</b>	<ul style="list-style-type: none"> <li>• 81x132x14 mm</li> <li>• Inwall Box 2M – Ex. Bticino 502E</li> <li>• Inwall Box Round 60 Diameter – Ex. Gewiss 24232</li> <li>• Inwall Box 3M – Ex. Bticino 503E</li> </ul>
<b>Orientation</b>	<ul style="list-style-type: none"> <li>• Horizontal or Vertical</li> </ul>
<b>Supply</b>	<ul style="list-style-type: none"> <li>• POE (Power Over Ethernet)</li> </ul>
<b>Monitor</b>	<ul style="list-style-type: none"> <li>• LCD HD IPS 5"</li> </ul>
<b>Resolution</b>	<ul style="list-style-type: none"> <li>• 1280x720 px</li> </ul>
<b>Color</b>	<ul style="list-style-type: none"> <li>• 16,7 Millions Colors ( True Colors)</li> </ul>
<b>Brightness</b>	<ul style="list-style-type: none"> <li>• 400 nits</li> </ul>
<b>Touch Screen</b>	<ul style="list-style-type: none"> <li>• Capacitive with multi touch &amp; gestures support</li> </ul>
<b>Speakers</b>	<ul style="list-style-type: none"> <li>• High definition audio through incorporated amps - 2 W</li> </ul>
<b>Microphone</b>	<ul style="list-style-type: none"> <li>• Integrated – echo canceling high resolution</li> </ul>
<b>Gyroscope</b>	<ul style="list-style-type: none"> <li>• Auto survey orientation</li> </ul>
<b>Proximity</b>	<ul style="list-style-type: none"> <li>• Integrated</li> </ul>
<b>Brightness Sensor</b>	<ul style="list-style-type: none"> <li>• Integrated</li> </ul>
<b>Connectivity</b>	<ul style="list-style-type: none"> <li>• LAN 100 baseIT</li> </ul>
<b>Certification</b>	<ul style="list-style-type: none"> <li>• CE / FCC CLASS B / FCC part15 / ROHS / WEEE</li> </ul>
<b>Operating System</b>	<ul style="list-style-type: none"> <li>• Android 6</li> </ul>

## Order Codes

**WS05H10WEB**  
Horizone Touch Panel 5" - Black

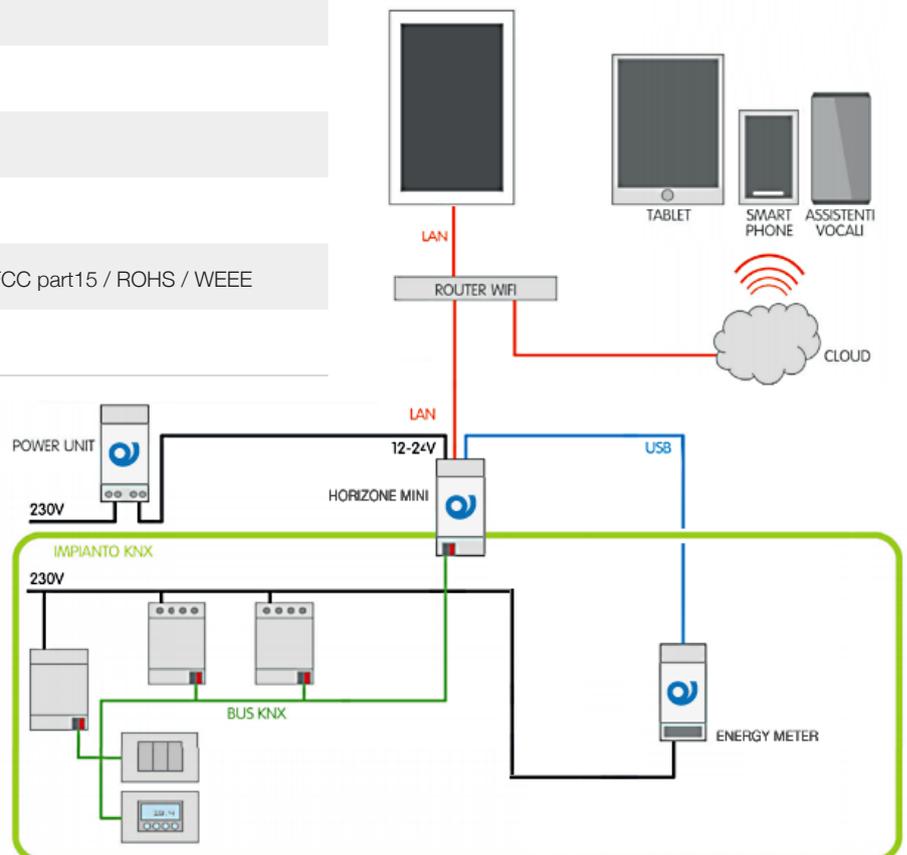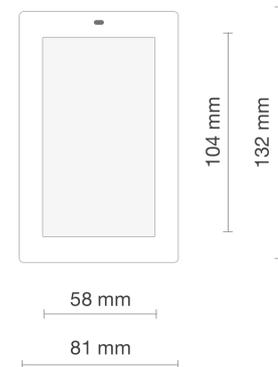

# IP Touch Panel 8"

Horzone IP Touch Panel is an Android based touch panel with a coloured 8" display in which can be installed third-party applications for the integration of different systems.




## Technical Features

<b>Dimensions:</b>	<ul style="list-style-type: none"> <li>• 224x149x16</li> <li>• Inwall Box 154x98x69 mm – Ex. Bticino 16204</li> </ul>
<b>Orientation</b>	<ul style="list-style-type: none"> <li>• Horizontal or Vertical</li> </ul>
<b>Supply</b>	<ul style="list-style-type: none"> <li>• POE (Power Over Ethernet)</li> </ul>
<b>Type</b>	<ul style="list-style-type: none"> <li>• LCD HD IPS 8"</li> </ul>
<b>Resolution</b>	<ul style="list-style-type: none"> <li>• 1280x720 px</li> </ul>
<b>Color</b>	<ul style="list-style-type: none"> <li>• 16,7 Millions Colors ( True Colors)</li> </ul>
<b>Brightness</b>	<ul style="list-style-type: none"> <li>• 400 nits</li> </ul>
<b>Touch Screen</b>	<ul style="list-style-type: none"> <li>• Capacitive with multi touch &amp; gestures support</li> </ul>
<b>Speakers</b>	<ul style="list-style-type: none"> <li>• High definition audio through incorporated amps - 2 W</li> </ul>
<b>Microphone</b>	<ul style="list-style-type: none"> <li>• Integrated – echo canceling high resolution</li> </ul>
<b>Gyroscope</b>	<ul style="list-style-type: none"> <li>• Auto survey orientation</li> </ul>
<b>Proximity</b>	<ul style="list-style-type: none"> <li>• Integrated</li> </ul>
<b>Brightness Sensor</b>	<ul style="list-style-type: none"> <li>• Integrated</li> </ul>
<b>Connectivity</b>	<ul style="list-style-type: none"> <li>• LAN 100 baseT</li> </ul>
<b>Certification</b>	<ul style="list-style-type: none"> <li>• CE / FCC CLASS B / FCC part15 / ROHS / WEEE</li> </ul>
<b>Operating System</b>	<ul style="list-style-type: none"> <li>• Android 6</li> </ul>

## Order Codes

**WS05H10WEB**  
Horzone Touch Panel 8" - Black

**WS05H20WEB**  
Horzone Touch Panel 8" - White

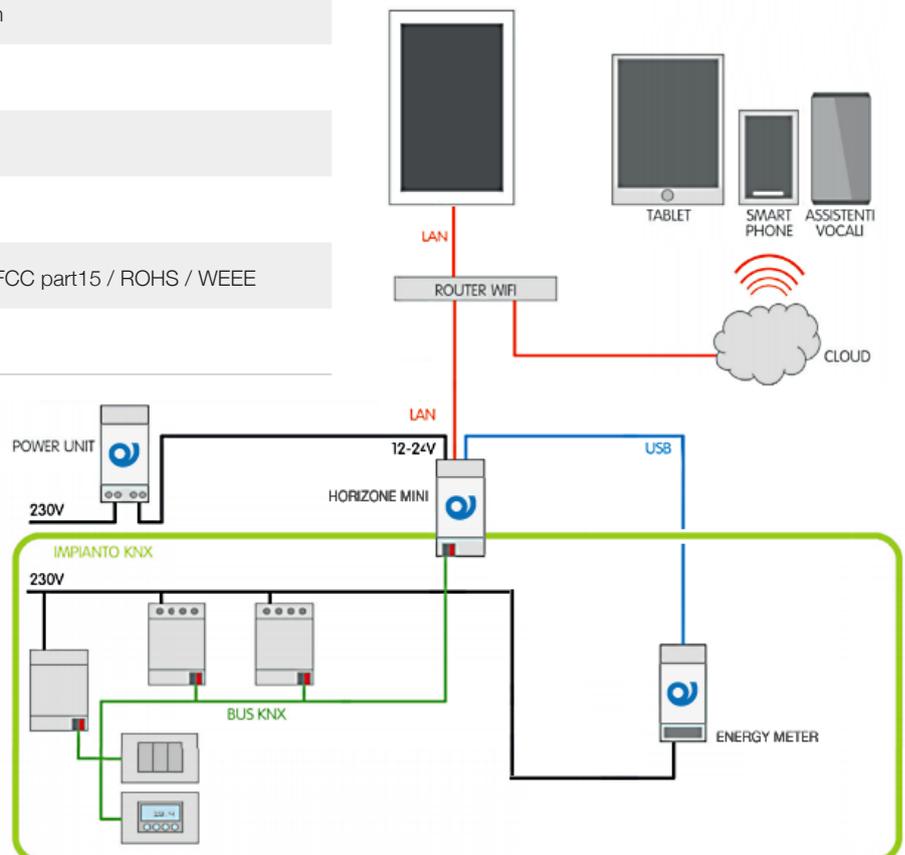



# Actuators



Lighting Management  
Dimming, DALI, DMX  
Climate Control  
Shutters Management  
Sensors  
Metering  
System Components  
Interfaces



Actuators, Dimmers, Presence Detectors, System components

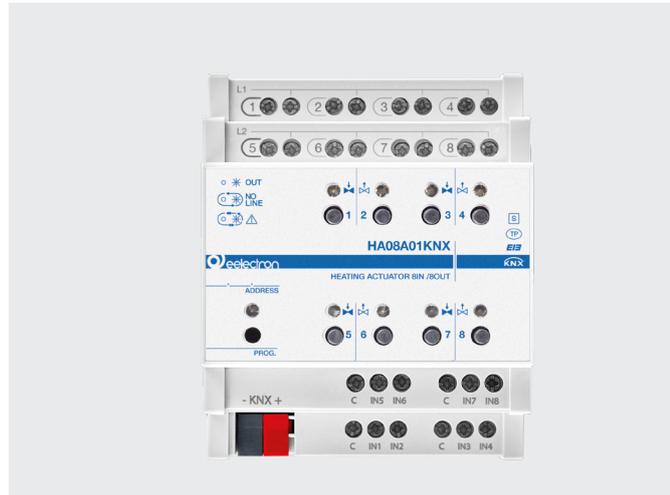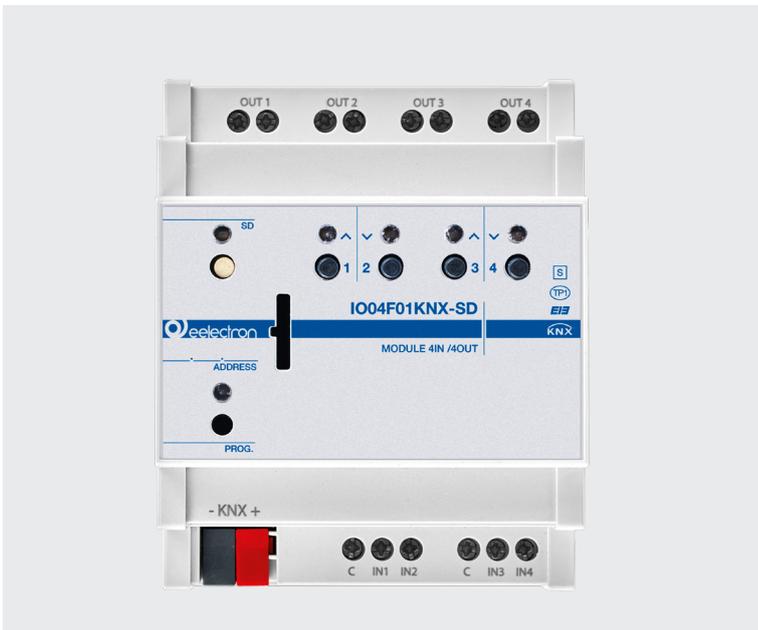

Universal actuator  
16 IN / 16 OUT with  
manual control

Universal actuator  
4 IN / 4 OUT with  
manual control

Heating actuator  
8 IN / 8 OUT with  
manual control

Universal actuator  
16 OUT with  
manual control

DALI Gateway TW  
2 CH

Multi Sensor




# Inwall Module

3 IN / 2 OUT

IO32D01KNX module includes: 2 digital inputs, 1 analog input, 2 relay outputs (bistable).

Digital inputs are intended to be connected to free potential contacts and can interface sensors, conventional push buttons, etc; they can be used for on/off controls, dimming, shutter control, scene recall and control, sequences of 3 objects. Analog input, can manage one temperature probe (with On/Off threshold) or one thermostats to control heating and cooling equipments, valves, 2 and 4 pipes fan coils; etc. Analog input, alternatively to the temperature sensor, can manage a Infrared Receiver (IRX) in order to forward to the bus up to 8 functions coming from a Infrared Remote Control (IRC) with on/off commands, scenes, sequences of 2 objects, dimmers and shutters. Outputs include switching functions with timed delays, stair-case functions, scene recall, lock or logic functions.

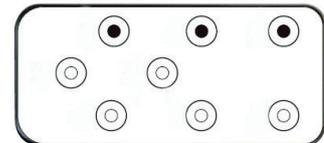

## Technical Features

<b>Mechanical data</b>	<ul style="list-style-type: none"> <li>Dimensions: (Ø x H) 52 x 28 mm</li> </ul>
<b>Mounting</b>	<ul style="list-style-type: none"> <li>Inwall</li> </ul>
<b>Supply</b>	<ul style="list-style-type: none"> <li>Via bus EIB/KNX cable: 21 ÷ 32 Vdc</li> </ul>
<b>Input - digital mode</b>	<ul style="list-style-type: none"> <li>For free potential contacts (dry contacts)</li> <li>Max. length of Connecting Cables ≤ 30 m (twisted cable)</li> </ul>
<b>Input - analog mode for temperature probe</b>	<ul style="list-style-type: none"> <li>For NTC temperature probe eelectron code:</li> <li>TS01A01ACC (range from -20°C to +100°C)</li> <li>TS01B01ACC (range from -50°C to +60°C)</li> <li>TS01D01ACC (range from -40°C to 125°C)</li> <li>Max. length of Connecting Cable: ≤ 20 m (twisted cable)</li> </ul>
<b>Input - analog mode for Infrared Receiver (IRX)</b>	<ul style="list-style-type: none"> <li>These accessories must be used:</li> <li>IR01A01ACC (IRX with cable and connector)</li> <li>RC80A01IRC (IR remote control 8 channels)</li> </ul>
<b>Output rate</b>	<ul style="list-style-type: none"> <li>10 A cos φ 1 - 230 Vac</li> <li>Max capacitance @230 V: 21 µF 5.000 cycles</li> <li>Incandescent lamps max load: 1500 W 50.000 cycles</li> <li>Fluorescent lamps max load: 6 x18 W 25.000 cycles</li> <li>Halogen lamps max load: 500 W 50.000 cycles</li> <li>Gas discharge lamps max load: 200 W 25.000 cycles</li> </ul>

## Order Codes

**IO32D01KNX**  
Inwall Actuator 3 IN / 2 OUT

**IR00A01ACC**  
IRX Cabling

**RC80A01IRC**  
IRC Device

# Universal Module

4 IN / 4 OUT PLUS — F Series

Device IO04F01KNX is a DIN rail EIB / KNX actuators with 4 relay outputs that can be configured as:

- 4 outputs for light / load control
- 4 channels for valve in PWM (solenoid actuators)
- 2 channels for roller shutter / venetian control
- 2 channels for 3-point valve control
- 1 fan coil actuators 2-pipes

The device also includes 4 inputs that can be connected to pushbuttons, switches, or be configured as outputs to activate individual signaling LEDs (eelectron code LD00A01ACC / LD00A11ACC) and can be used for on / off, dimming, shutters or venetian blinds / scenarios, sequences, step-by-step commands, etc. 4 inputs (of the 16) are configurable as analogue for the connection of NTC temperature probes (see probes eelectron code TS00A01ACC / TS00B01ACC) with which to send 4 temperature measurements on the bus and manage a simple on / off controls (e.g. thermo furniture).

It is also possible to enable 4 complete thermostat modules; each thermostat module manages 2 stages with integrated PI controller for driving heating and cooling equipment, valves, 2 and 4-pipe fan coils, etc.

Version IO04F01KNX-SD includes a microSD card reader includes a microSD card with which you can save the programming of the device to be able to restore it on an identical device in order to avoid programming in field or to allow a fast restore in case of failure.



## Technical Features

<b>Mechanical data</b>	<ul style="list-style-type: none"> <li>• Dimensions: 4 DIN modules</li> </ul>
<b>Supply</b>	<ul style="list-style-type: none"> <li>• Via bus EIB/KNX cable: 21 ÷ 32 Vdc</li> </ul>
<b>Input - digital mode</b>	<ul style="list-style-type: none"> <li>• For free potential contacts (dry contacts)</li> <li>• Max. length of Connecting Cables ≤ 30 m (twisted cable)</li> </ul>
<b>Input - analog mode for temperature probe</b>	<ul style="list-style-type: none"> <li>• For NTC temperature probe eelectron code:</li> <li>• TS01A01ACC (range from -20°C to +100°C)</li> <li>• TS01B01ACC (range from -50°C to +60°C)</li> <li>• TS01D01ACC (range from -40°C to 125°C)</li> <li>• Max. length of Connecting Cable: ≤ 20 m (twisted cable)</li> </ul>
<b>Output rate</b>	<ul style="list-style-type: none"> <li>• 16 A cos φ 1 - 230 Vac</li> <li>• 8 A cos φ 0.6 - 230 Vac</li> <li>• Max current relay output: 16 A/16 AX (140 μF)</li> <li>• Max peak current: 165 A / 20 ms</li> <li>• Incandescent lamps: max 10 A</li> <li>• Motors e motor reduction units: max 10 A</li> <li>• Fluorescent lamps (max 140 μF) max 3 A (700 W)</li> <li>• Electronic ballast: max 6 A</li> <li>• LED's lamps drivers: always check that the maximum peak current drawn by led power supply is lower than maximum peak current allowed for the relay</li> </ul>

## Order Codes

### IO04F01KNX

Universal Actuator 4 IN / 4 OUT Plus

### IO04F01KNX-SD

Universal Actuator 4 IN / 4 OUT + SD Card

# Universal Module

8 IN / 8 OUT PLUS — F Series

Device IO08F01KNX is a DIN rail EIB / KNX actuators with 8 relay outputs that can be configured as:

- 8 outputs for light / load control
- 8 channels for valve in PWM (solenoid actuators)
- 4 channels for roller shutter / venetian control
- 4 channels for 3-point valve control
- 2 fan coil actuators 2-pipes

It is also possible to combine 2 or 3 relays with logic interlock for 4-pipe / 3-speed fan coil control or combine groups of relays (up to 8) for special function using logic interlock .

The device also includes 8 inputs that can be connected to pushbuttons, switches, or be configured as outputs to activate individual signaling LEDs (eelectron code LD00A01ACC / LD00A11ACC) and can be used for on / off, dimming, shutters or venetian blinds / scenarios, sequences, step-by-step commands, etc. 4 inputs (of the 8) are configurable as analogue for the connection of NTC temperature probes (see probes eelectron code TS00A01ACC / TS00B01ACC) with which to send 4 temperature measurements on the bus and manage a simple on / off controls (e.g. thermo furniture).

It is also possible to enable 2 complete thermostat modules; each thermostat module manages 2 stages with integrated PI controller for driving heating and cooling equipment, valves, 2 and 4-pipe fan coils, etc.

Version IO08F01KNX-SD includes a microSD card reader includes a microSD card with which you can save the programming of the device to be able to restore it on an identical device in order to avoid programming in field or to allow a fast restore in case of failure.



## Technical Features

<b>Mechanical data</b>	<ul style="list-style-type: none"> <li>• Dimensions: 4 DIN modules</li> </ul>
<b>Supply</b>	<ul style="list-style-type: none"> <li>• Via bus EIB/KNX cable: 21 ÷ 32 Vdc</li> </ul>
<b>Input - digital mode</b>	<ul style="list-style-type: none"> <li>• For free potential contacts (dry contacts)</li> <li>• Max. length of Connecting Cables ≤ 30 m (twisted cable)</li> </ul>
<b>Input - analog mode for temperature probe</b>	<ul style="list-style-type: none"> <li>• For NTC temperature probe eelectron code:</li> <li>• TS01A01ACC (range from -20°C to +100°C)</li> <li>• TS01B01ACC (range from -50°C to +60°C)</li> <li>• TS01D01ACC (range from -40°C to 125°C)</li> <li>• Max. length of Connecting Cable: ≤ 20 m (twisted cable)</li> </ul>
<b>Output rate</b>	<ul style="list-style-type: none"> <li>• 16 A cos φ 1 - 230 Vac</li> <li>• 8 A cos φ 0.6 - 230 Vac</li> <li>• Max current relay output: 16 A/16 AX (140 μF)</li> <li>• Max peak current: 165 A / 20 ms</li> <li>• Incandescent lamps: max 10 A</li> <li>• Motors e motor reduction units: max 10 A</li> <li>• Fluorescent lamps (max 140 μF) max 3 A (700 W)</li> <li>• Electronic ballast: max 6 A</li> <li>• LED's lamps drivers: always check that the maximum peak current drawn by led power supply is lower than maximum peak current allowed for the relay</li> </ul>

## Order Codes

**IO08F01KNX**  
Universal Actuator 8 IN / 8 OUT Plus

**IO08F01KNX-SD**  
Universal Actuator 8 IN / 8 OUT + SD Card

# Universal Module

12 IN / 12 OUT PLUS — F Series

Device IO12F01KNX is a DIN rail EIB / KNX actuators with 12 relay outputs that can be configured as:

- 12 outputs for light / load control
- 12 channels for valve in PWM (solenoid actuators)
- 6 channels for roller shutter / venetian control
- 6 channels for 3-point valve control
- 3 fan coil actuators 2-pipes / 2 fan coil actuators 4-pipes

The device also includes 12 inputs that can be connected to pushbuttons, switches, or be configured as outputs to activate individual signaling LEDs (eelectron code LD00A01ACC / LD00A11ACC) and can be used for on / off, dimming, shutters or venetian blinds / scenarios, sequences, step-by-step commands, etc. 4 inputs (of the 12) are configurable as analogue for the connection of NTC temperature probes (see probes eelectron code TS00A01ACC / TS00B01ACC) with which to send 4 temperature measurements on the bus and manage a simple on / off controls (e.g. thermo furniture).

It is also possible to enable 3 complete thermostat modules; each thermostat module manages 2 stages with integrated PI controller for driving heating and cooling equipment, valves, 2 and 4-pipe fan coils, etc.

Version IO12F01KNX-SD includes a microSD card reader includes a microSD card with which you can save the programming of the device to be able to restore it on an identical device in order to avoid programming in field or to allow a fast restore in case of failure.



## Technical Features

<b>Mechanical data</b>	<ul style="list-style-type: none"> <li>• Dimensions: 6 DIN modules</li> </ul>
<b>Supply</b>	<ul style="list-style-type: none"> <li>• Via bus EIB/KNX cable: 21 ÷ 32 Vdc</li> </ul>
<b>Input - digital mode</b>	<ul style="list-style-type: none"> <li>• For free potential contacts (dry contacts)</li> <li>• Max. length of Connecting Cables ≤ 30 m (twisted cable)</li> </ul>
<b>Input - analog mode for temperature probe</b>	<ul style="list-style-type: none"> <li>• For NTC temperature probe eelectron code:</li> <li>• TS01A01ACC (range from -20°C to +100°C)</li> <li>• TS01B01ACC (range from -50°C to +60°C)</li> <li>• TS01D01ACC (range from -40°C to 125°C)</li> <li>• Max. length of Connecting Cable: ≤ 20 m (twisted cable)</li> </ul>
<b>Output rate</b>	<ul style="list-style-type: none"> <li>• 16 A cos φ 1 - 230 Vac</li> <li>• 8 A cos φ 0.6 - 230 Vac</li> <li>• Max current relay output: 16 A/16 AX (140 μF)</li> <li>• Max peak current: 165 A / 20 ms</li> <li>• Incandescent lamps: max 10 A</li> <li>• Motors e motor reduction units: max 10 A</li> <li>• Fluorescent lamps (max 140 μF) max 3 A (700 W)</li> <li>• Electronic ballast: max 6 A</li> <li>• LED's lamps drivers: always check that the maximum peak current drawn by led power supply is lower than maximum peak current allowed for the relay</li> </ul>

## Order Codes

**IO08F01KNX**  
Universal Actuator 12 IN / 12 OUT Plus

**IO08F01KNX-SD**  
Universal Actuator 12 IN / 12 OUT + SD Card

# Universal Module

16 IN / 16 OUT PLUS — F Series

Device IO16F01KNX is a DIN rail EIB / KNX actuators with 16 relay outputs that can be configured as:

- 16 outputs for light / load control
- 16 channels for valve in PWM (solenoid actuators)
- 8 channels for roller shutter / venetian control
- 8 channels for 3-point valve control
- 4 fan coil actuators 2-pipes

It is also possible to combine 2 or 3 relays with logic interlock for 4-pipe / 3-speed fan coil control or combine groups of relays (up to 8) for special function using logic interlock .

The device also includes 16 inputs that can be connected to pushbuttons, switches, or be configured as outputs to activate individual signaling LEDs (eelectron code LD00A01ACC / LD00A11ACC) and can be used for on / off, dimming, shutters or venetian blinds / scenarios, sequences, step-by-step commands, etc. 4 inputs (of the 16) are configurable as analogue for the connection of NTC temperature probes (see probes eelectron code TS00A01ACC / TS00B01ACC) with which to send 4 temperature measurements on the bus and manage a simple on / off controls (e.g. thermo furniture). It is also possible to enable 2 complete thermostat modules if inputs 3 ÷ 8 and 11 ÷ 16 are not used; each thermostat module manages 2 stages with integrated PI controller for driving heating and cooling equipment, valves, 2 and 4-pipe fan coils, etc.

Version IO16F01KNX-SD includes a microSD card reader includes a microSD card reader with which you can save the programming of the device to be able to restore it on an identical device in order to avoid programming in field or to allow a fast restore in case of failure.



## Technical Features

<b>Mechanical data</b>	<ul style="list-style-type: none"> <li>• Dimensions: 8 DIN modules</li> </ul>
<b>Supply</b>	<ul style="list-style-type: none"> <li>• Via bus EIB/KNX cable: 21 ÷ 32 Vdc</li> </ul>
<b>Input - digital mode</b>	<ul style="list-style-type: none"> <li>• For free potential contacts (dry contacts)</li> <li>• Max. length of Connecting Cables ≤ 30 m (twisted cable)</li> </ul>
<b>Input - analog mode for temperature probe</b>	<ul style="list-style-type: none"> <li>• For NTC temperature probe eelectron code:</li> <li>• TS01A01ACC (range from -20°C to +100°C)</li> <li>• TS01B01ACC (range from -50°C to +60°C)</li> <li>• TS01D01ACC (range from -40°C to 125°C)</li> <li>• Max. length of Connecting Cable: ≤ 20 m (twisted cable)</li> </ul>
<b>Output rate</b>	<ul style="list-style-type: none"> <li>• 16 A cos φ 1 - 230 Vac</li> <li>• 8 A cos φ 0.6 - 230 Vac</li> <li>• Max current relay output: 16 A/16 AX (140 μF)</li> <li>• Max peak current: 165 A / 20 ms</li> <li>• Incandescent lamps: max 10 A</li> <li>• Motors e motor reduction units: max 10 A</li> <li>• Fluorescent lamps (max 140 μF) max 3 A (700 W)</li> <li>• Electronic ballast: max 6 A</li> <li>• LED's lamps drivers: always check that the maximum peak current drawn by led power supply is lower than maximum peak current allowed for the relay</li> </ul>

## Order Codes

**IO16F01KNX**  
Universal Actuator 16 IN / 16 OUT Plus

**IO16F01KNX-SD**  
Universal Actuator 16 IN / 16 OUT + SD Card

# Module 4 Digital Inputs

4 IN — F Series

The BI04F01KNX device is equipped with 4 inputs for interfacing dry contacts, for example sensors, switch buttons, etc.

Inputs functions are: on / off control, dimmers, roller shutters and scene recall, etc.

Short and long pressure management, switching, sequences are possible. The lines can be monitored using an end of line resistor (EOL) of 1.8KΩ [1/8W] value which allows the device to manage sensors with a higher level of safety such as magnetic contacts, motion detectors.

The pulse counter function is also available for counting the pulses detectable on each input. One of the 4 inputs can be configured as analogue for the connection of NTC temperature probes (see eelectron probes code TS00A01ACC / TS00B01ACC) with which to send the temperature measurement on the bus or manage a complete thermostat module. The thermostat manages 2 stages with an integrated PI controller for controlling heating and cooling equipment, valves, 2 and 4-pipe fan coils, etc. Two of the 4 inputs can be configured as “smart sensor” for the connection of ‘plug-in sensor’ (see SM03E01ACC CO<sub>2</sub> - temperature, SM03E02ACC VOC - temperature - eCO<sub>2</sub>). On the front panel there is a LED to display the status of each input.

The device integrates the “Virtual Holder Logic”; the field of application is the hotel room: through a magnetic sensor installed on the door and connected to a digital input, accurate presence information is managed. The presence detection solution can deduce the presence of people in the room using one or more dedicated sensors. It also detects an unexpected presence and is able to differentiate more behaviors.

Moreover, 10 logic blocks are available to implement simple expressions with logical or threshold operator or complex expressions with algebraic and conditional operators; It is possible to use predefined algorithms as proportional controls of temperature and humidity or dew point calculation.



## Technical Features

<b>Mechanical data</b>	<ul style="list-style-type: none"> <li>• Dimensions: 4 DIN modules</li> </ul>
<b>Supply</b>	<ul style="list-style-type: none"> <li>• Via bus EIB/KNX cable: 21 ÷ 32 Vdc</li> <li>• Auxiliary supply: 230 Vac</li> </ul>
<b>Input - digital mode</b>	<ul style="list-style-type: none"> <li>• For free potential contacts (dry contacts)</li> <li>• Max. length of Connecting Cables ≤ 100 m (twisted cable)</li> </ul>
<b>Input - analog mode for temperature probe</b>	<p>For NTC temperature probe eelectron code:</p> <ul style="list-style-type: none"> <li>• TS01A01ACC (range from -20°C to +100°C)</li> <li>• TS01B01ACC (range from -50°C to +60°C)</li> <li>• Max. length of Connecting Cable: ≤ 30 m (twisted cable)</li> </ul>

## Order Codes

**BI04F01KNX**  
Din Module 4 Digital Inputs

# Module 8 Digital Inputs

8 IN — F Series

The BI08F01KNX device is equipped with 8 inputs for interfacing dry contacts, for example sensors, switch buttons, etc.

Inputs functions are: on / off control, dimmers, roller shutters and scene recall, etc.

Short and long pressure management, switching, sequences are possible. The lines can be monitored using an end of line resistor (EOL) of 1.8KΩ [1/8W] value which allows the device to manage sensors with a higher level of safety such as magnetic contacts, motion detectors.

The pulse counter function is also available for counting the pulses detectable on each input. One of the 8 inputs can be configured as analogue for the connection of NTC temperature probes (see eelectron probes code TS00A01ACC / TS00B01ACC) with which to send the temperature measurement on the bus or manage a complete thermostat module. The thermostat manages 2 stages with an integrated PI controller for controlling heating and cooling equipment, valves, 2 and 4-pipe fan coils, etc. Two of the 4 inputs can be configured as “smart sensor” for the connection of ‘plug-in sensor’ (see SM03E01ACC CO<sub>2</sub> - temperature, SM03E02ACC VOC - temperature - eCO<sub>2</sub>). On the front panel there is a LED to display the status of each input.

The device integrates the “Virtual Holder Logic”; the field of application is the hotel room: through a magnetic sensor installed on the door and connected to a digital input, accurate presence information is managed. The presence detection solution can deduce the presence of people in the room using one or more dedicated sensors. It also detects an unexpected presence and is able to differentiate more behaviors.

Moreover, 10 logic blocks are available to implement simple expressions with logical or threshold operator or complex expressions with algebraic and conditional operators; It is possible to use predefined algorithms as proportional controls of temperature and humidity or dew point calculation.



## Technical Features

<b>Mechanical data</b>	<ul style="list-style-type: none"> <li>• Dimensions: 4 DIN modules</li> </ul>
<b>Supply</b>	<ul style="list-style-type: none"> <li>• Via bus EIB/KNX cable: 21 ÷ 32 Vdc</li> <li>• Auxiliary supply: 230 Vac</li> </ul>
<b>Input - digital mode</b>	<ul style="list-style-type: none"> <li>• For free potential contacts (dry contacts)</li> <li>• Max. length of Connecting Cables ≤ 100 m (twisted cable)</li> </ul>
<b>Input - analog mode for temperature probe</b>	<p>For NTC temperature probe eelectron code:</p> <ul style="list-style-type: none"> <li>• TS01A01ACC (range from -20°C to +100°C)</li> <li>• TS01B01ACC (range from -50°C to +60°C)</li> <li>• Max. length of Connecting Cable: ≤ 30 m (twisted cable)</li> </ul>

## Order Codes

**BI08F01KNX**  
Din Module 8 Digital Inputs

# Module 16 Digital Inputs

16 IN – F Series

Device 16 Input Module BI16F01KNX is an EIB/ KNX DIN rail mounting device useful to interface commands (e.g. push buttons) for any kind of applications. The device is equipped with 16 binary inputs. Inputs can be connected to conventional switching devices (potential free), e.g. push buttons, switches, floating contacts, for switching functions with pulse edge evaluation (e.g. rising or falling edge, toggle...).

Inputs can be configured with ETS SW as output to drive Leds. Inputs can be used for on/off commands, dimming, shutter control, scene recall and control; outputs include switching function, scene recall and control logic function.

Device is equipped with KNX communication interface.



## Technical Features

<b>Mechanical data</b>	<ul style="list-style-type: none"> <li>• Dimensions: 8 DIN modules</li> </ul>
<b>Supply</b>	<ul style="list-style-type: none"> <li>• Via bus EIB/KNX cable: 21 ÷ 32 Vdc</li> <li>• Auxiliary supply: 230 Vac</li> </ul>
<b>Input - digital mode</b>	<ul style="list-style-type: none"> <li>• For free potential contacts (dry contacts)</li> <li>• Max. length of Connecting Cables ≤ 100 m (twisted cable)</li> </ul>

## Order Codes

**BI16F01KNX**  
Din Module 16 Digital Inputs

# Universal Module

4 OUT - PLUS — F Series

Device BO04F01KNX is a DIN rail EIB / KNX actuators with 4 relay outputs that can be configured as:

- 4 outputs for light / load control
- 4 channels for valve in PWM (solenoid actuators)
- 2 channels for roller shutter / venetian control
- 2 channels for 3-point valve control
- 1 fan coil actuators 2-pipes

Version BO04F01KNX-SD includes a microSD card reader with which you can save the programming of the device to be able to restore it on an identical device in order to avoid programming in field or to allow a fast restore in case of failure.



## Technical Features

<b>Mechanical data</b>	<ul style="list-style-type: none"> <li>• Dimensions: 4 DIN modules</li> </ul>
<b>Supply</b>	<ul style="list-style-type: none"> <li>• Via bus EIB/KNX cable: 21 ÷ 32 Vdc</li> </ul>
<b>Output rate</b>	<ul style="list-style-type: none"> <li>• 16 A cos φ 1 - 230 Vac</li> <li>• 8 A cos φ 0.6 - 230 Vac</li> <li>• Max current relay output: 16 A/16 AX (140 μF)</li> <li>• Max peak current: 165 A / 20 ms</li> <li>• Incandescent lamps: max 10 A</li> <li>• Motors e motor reduction units: max 10 A</li> <li>• Fluorescent lamps (max 140 μF) max 3 A (700 W)</li> <li>• Electronic ballast: max 6 A</li> <li>• LED's lamps drivers: always check that the maximum peak current drawn by led power supply is lower than maximum peak current allowed for the relay</li> </ul>

## Order Codes

**BO04F01KNX**  
Universal Actuator 4 OUT Plus

**BO04F01KNX - SD**  
Universal Actuator 4 OUT + SD Card

# Universal Module


8 OUT - PLUS — F Series

Device BO08F01KNX is a DIN rail EIB / KNX actuators with 8 relay outputs that can be configured as:

- 8 outputs for light / load control
- 8 channels for valve in PWM (solenoid actuators)
- 4 channels for roller shutter / venetian control
- 4 channels for 3-point valve control
- 2 fan coil actuators 2-pipes

It is also possible to combine 2 or 3 relays with logic interlock for 4-pipe / 3-speed fan coil control or combine groups of relays (up to 8) for special function using logic interlock .

Version BO08F01KNX-SD includes a microSD card reader with which you can save the programming of the device to be able to restore it on an identical device in order to avoid programming in field or to allow a fast restore in case of failure.

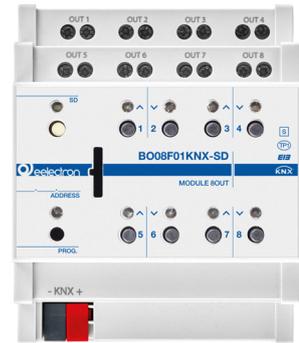

## Technical Features

<b>Mechanical data</b>	<ul style="list-style-type: none"> <li>• Dimensions: 4 DIN modules</li> </ul>
<b>Supply</b>	<ul style="list-style-type: none"> <li>• Via bus EIB/KNX cable: 21 ÷ 32 Vdc</li> </ul>
<b>Output rate</b>	<ul style="list-style-type: none"> <li>• 16 A cos <math>\varphi</math> 1 - 230 Vac</li> <li>• 8 A cos <math>\varphi</math> 0.6 - 230 Vac</li> <li>• Max current relay output: 16 A/16 AX (140 <math>\mu</math>F)</li> <li>• Max peak current: 165 A / 20 ms</li> <li>• Incandescent lamps: max 10 A</li> <li>• Motors e motor reduction units: max 10 A</li> <li>• Fluorescent lamps (max 140 <math>\mu</math>F) max 3 A (700 W)</li> <li>• Electronic ballast: max 6 A</li> <li>• LED's lamps drivers: always check that the maximum peak current drawn by led power supply is lower than maximum peak current allowed for the relay</li> </ul>

## Order Codes

- BO08F01KNX**  
Universal Actuator 8 OUT Plus
- BO08F01KNX - SD**  
Universal Actuator 8 OUT + SD Card

# Universal Module

12 OUT - PLUS — F Series

Device BO12F01KNX is a DIN rail EIB / KNX actuators with 16 relay outputs that can be configured as:

- 12 outputs for light / load control
- 12 channels for valve in PWM (solenoid actuators)
- 6 channels for roller shutter / venetian control
- 6 channels for 3-point valve control
- 3 fan coil actuators 2-pipes / 2 fan coil actuators 4-pipes

It is also possible to combine 2 or 3 relays with logic interlock for 4-pipe / 3-speed fan coil control or combine groups of relays (up to 6) for special function using logic interlock.

Version BO12F01KNX-SD includes a microSD Card reader includes a microSD card reader with which you can save the programming of the device to be able to restore it on an identical device in order to avoid programming in field or to allow a fast restore in case of failure.



## Technical Features

<b>Mechanical data</b>	<ul style="list-style-type: none"> <li>• Dimensions: 6 DIN modules</li> </ul>
<b>Supply</b>	<ul style="list-style-type: none"> <li>• Via bus EIB/KNX cable: 21 ÷ 32 Vdc</li> </ul>
<b>Output rate</b>	<ul style="list-style-type: none"> <li>• 16 A cos <math>\varphi</math> 1 - 230 Vac</li> <li>• 8 A cos <math>\varphi</math> 0.6 - 230 Vac</li> <li>• Max current relay output: 16 A/16 AX (140 <math>\mu</math>F)</li> <li>• Max peak current: 165 A / 20 ms</li> <li>• Incandescent lamps: max 10 A</li> <li>• Motors e motor reduction units: max 10 A</li> <li>• Fluorescent lamps (max 140 <math>\mu</math>F) max 3 A (700 W)</li> <li>• Electronic ballast: max 6 A</li> <li>• LED's lamps drivers: always check that the maximum peak current drawn by led power supply is lower than maximum peak current allowed for the relay</li> </ul>

## Order Codes

**BO12F01KNX**  
Universal Actuator 12 OUT Plus

**BO12F01KNX - SD**  
Universal Actuator 12 OUT + SD Card

# Universal Module

16 OUT - PLUS — F Series

Device BO16F01KNX is a DIN rail EIB / KNX actuators with 16 relay outputs that can be configured as:

- 16 outputs for light / load control
- 16 channels for valve in PWM (solenoid actuators)
- 8 channels for roller shutter / venetian control
- 8 channels for 3-point valve control
- 4 fan coil actuators 2-pipes

It is also possible to combine 2 or 3 relays with logic interlock for 4-pipe / 3-speed fan coil control or combine groups of relays (up to 8) for special function using logic interlock .

Version BO16F01KNX-SD includes a microSD Card reader includes a microSD card reader with which you can save the programming of the device to be able to restore it on an identical device in order to avoid programming in field or to allow a fast restore in case of failure.



## Technical Features

<b>Mechanical data</b>	<ul style="list-style-type: none"> <li>• Dimensions: 8 DIN modules</li> </ul>
<b>Supply</b>	<ul style="list-style-type: none"> <li>• Via bus EIB/KNX cable: 21 ÷ 32 Vdc</li> </ul>
<b>Output rate</b>	<ul style="list-style-type: none"> <li>• 16 A cos <math>\phi</math> 1 - 230 Vac</li> <li>• 8 A cos <math>\phi</math> 0.6 - 230 Vac</li> <li>• Max current relay output: 16 A/16 AX (140 <math>\mu</math>F)</li> <li>• Max peak current: 165 A / 20 ms</li> <li>• Incandescent lamps: max 10 A</li> <li>• Motors e motor reduction units: max 10 A</li> <li>• Fluorescent lamps (max 140 <math>\mu</math>F) max 3 A (700 W)</li> <li>• Electronic ballast: max 6 A</li> <li>• LED's lamps drivers: always check that the maximum peak current drawn by led power supply is lower than maximum peak current allowed for the relay</li> </ul>

## Order Codes

- BO16F01KNX**  
Universal Actuator 16 OUT Plus
- BO16F01KNX - SD**  
Universal Actuator 16 OUT + SD Card

# Universal Module


## 24 OUT - PLUS — F Series

Device BO24F01KNX is a DIN rail EIB / KNX actuators with 16 relay outputs that can be configured as:

- 24 outputs for light / load control
- 24 channels for valve in PWM (solenoid actuators)
- 12 channels for roller shutter / venetian control
- 12 channels for 3-point valve control
- 6 fan coil actuators 2-pipes / 4 fan coil actuators 4-pipes

It is also possible to combine 3,4 or 5 relays with logic interlock for 4-pipe / 3-speed fan coil control or combine groups of relays (up to 6) for special function using logic interlock .

Version BO24F01KNX-SD includes a microSD Card reader includes a microSD card reader with which you can save the programming of the device to be able to restore it on an identical device in order to avoid programming in field or to allow a fast restore in case of failure.

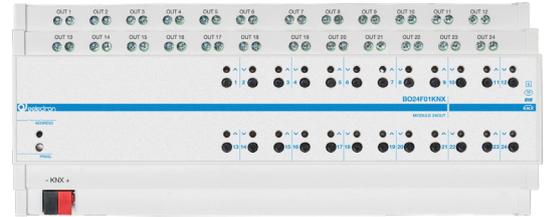

### Technical Features

<b>Mechanical data</b>	<ul style="list-style-type: none"> <li>• Dimensions: 12 DIN modules</li> </ul>
<b>Supply</b>	<ul style="list-style-type: none"> <li>• Via bus EIB/KNX cable: 21 ÷ 32 Vdc</li> </ul>
<b>Output rate</b>	<ul style="list-style-type: none"> <li>• 16 A cos <math>\phi</math> 1 - 230 Vac</li> <li>• 8 A cos <math>\phi</math> 0.6 - 230 Vac</li> <li>• Max current relay output: 16 A/16 AX (140 <math>\mu</math>F)</li> <li>• Max peak current: 165 A / 20 ms</li> <li>• Incandescent lamps: max 10 A</li> <li>• Motors e motor reduction units: max 10 A</li> <li>• Fluorescent lamps (max 140 <math>\mu</math>F) max 3 A (700 W)</li> <li>• Electronic ballast: max 6 A</li> <li>• LED's lamps drivers: always check that the maximum peak current drawn by led power supply is lower than maximum peak current allowed for the relay</li> </ul>

### Order Codes

- BO24F01KNX**  
Universal Actuator 12 OUT Plus
- BO24F01KNX - SD**  
Universal Actuator 12 OUT + SD Card

# Universal Module

## 4 OUT — K Series

The device BO04K01KNX is a DIN actuator with 16A – 230 V AC relay outputs for controlling loads or shutters and blinds, it has 4 relay outputs and they can be configured in different ways:

- Every single output configured independently to control lights or generic loads
- Outputs configured in pairs to manage shutters, blinds, etc. ... (equipped with mechanical end position)

8 logic blocks are available to implement simple expressions with logical or threshold operator or complex expressions with algebraic and conditional operators Device is equipped with KNX communication interface.



### Technical Features

<b>Mechanical data</b>	<ul style="list-style-type: none"> <li>• Dimensions: 4 DIN modules</li> </ul>
<b>Supply</b>	<ul style="list-style-type: none"> <li>• Via bus EIB/KNX cable: 21 ÷ 32 Vdc</li> </ul>
<b>Output rate</b>	<ul style="list-style-type: none"> <li>• 16 A cos φ 1 - 230 Vac</li> <li>• 8 A cos φ 0.6 - 230 Vac</li> <li>• Max current relay output: 16 A cos φ 1 - 250 Vac</li> <li>• Max peak current: 117 A (TV-8 rating)</li> <li>• Incandescent lamps: max 5 A</li> <li>• Motors e motor reduction units: max 3 A</li> <li>• Tungsten: max 8 A</li> <li>• Electronic ballast: max 8 A</li> <li>• LED's lamps drivers: always check that the maximum peak current drawn by led power supply is lower than maximum peak current allowed for the relay</li> </ul>

### Order Codes

**BO04K01KNX**  
Universal Actuator 4 OUT

# Universal Module

## 8 OUT — K Series

The device BO08K01KNX is a DIN actuator with 16A – 230 V AC relay outputs for controlling loads or shutters and blinds. It has 8 relay outputs and they can be configured in different ways:

- Every single output configured independently to control lights or generic loads
- Outputs configured in pairs to manage shutters, blinds, etc. ... (equipped with mechanical end position)

8 logic blocks are available to implement simple expressions with logical or threshold operator or complex expressions with algebraic and conditional operators Device is equipped with KNX communication interface



### Technical Features

<b>Mechanical data</b>	<ul style="list-style-type: none"> <li>• Dimensions: 6 DIN modules</li> </ul>
<b>Supply</b>	<ul style="list-style-type: none"> <li>• Via bus EIB/KNX cable: 21 ÷ 32 Vdc</li> </ul>
<b>Output rate</b>	<ul style="list-style-type: none"> <li>• 16 A cos <math>\varphi</math> 1 - 230 Vac</li> <li>• 8 A cos <math>\varphi</math> 0.6 - 230 Vac</li> <li>• Max current relay output: 16 A cos <math>\varphi</math> 1 - 250 Vac</li> <li>• Max peak current: 117 A (TV-8 rating)</li> <li>• Incandescent lamps: max 5 A</li> <li>• Motors e motor reduction units: max 3 A</li> <li>• Tungsten: max 8 A</li> <li>• Electronic ballast: max 8 A</li> <li>• LED's lamps drivers: always check that the maximum peak current drawn by led power supply is lower than maximum peak current allowed for the relay</li> </ul>

### Order Codes

**BO08K01KNX**  
Universal Actuator 8 OUT

# Universal Module

12 OUT – K Series

The device BO12K01KNX is a DIN actuator with 16A – 230 V AC relay outputs for controlling loads or shutters and blinds. It has 12 relay outputs and they can be configured in different ways:

- Every single output configured independently to control lights or generic loads
- Outputs configured in pairs to manage shutters, blinds, etc. ... (equipped with mechanical end position)

8 logic blocks are available to implement simple expressions with logical or threshold operator or complex expressions with algebraic and conditional operators Device is equipped with KNX communication interface



## Technical Features

<b>Mechanical data</b>	<ul style="list-style-type: none"> <li>• Dimensions: 8 DIN modules</li> </ul>
<b>Supply</b>	<ul style="list-style-type: none"> <li>• Via bus EIB/KNX cable: 21 ÷ 32 Vdc</li> </ul>
<b>Output rate</b>	<ul style="list-style-type: none"> <li>• 16 A cos <math>\varphi</math> 1 - 230 Vac</li> <li>• 8 A cos <math>\varphi</math> 0.6 - 230 Vac</li> <li>• Max current relay output: 16 A cos <math>\varphi</math> 1 - 250 Vac</li> <li>• Max peak current: 117 A (TV-8 rating)</li> <li>• Incandescent lamps: max 5 A</li> <li>• Motors e motor reduction units: max 3 A</li> <li>• Tungsten: max 8 A</li> <li>• Electronic ballast: max 8 A</li> <li>• LED's lamps drivers: always check that the maximum peak current drawn by led power supply is lower than maximum peak current allowed for the relay</li> </ul>

## Order Codes

**BO12K01KNX**  
Universal Actuator 12 OUT

# Universal Dimmer

1 CHANNEL 700 W - MASTER AND SLAVE

DM01D01KNX is a KNX power dimmer 1-channel acting as a Master Dimmer to which you can connect up to two Slave Modules (cod. DM01D01ACC) with identical characteristics to the Master power dimmer and connected to it by a local two wires bus.

Dimmer DM01D01KNX can be used in one of the following configurations:

**Trailing Edge:** The dimmer turns off part of the final part of the waveform of the input voltage resulting in reduced lamp output. This load regulation is used for resistive or capacitive loads (typically halogen lamps with electronic transformer or incandescent lamps).

**Leading Edge:** The dimmer turns off part of the initial part of the waveform of the input voltage, resulting in reduced lamp output. This load regulation is used for inductive loads (typically ferromagnetic transformers or toroidal).

The three channels are independent and can therefore operate on different phases of the same three phase systems respecting the limit of 230 Vac between phase and neutral.



## Technical Features

<b>Mechanical data</b>	<ul style="list-style-type: none"> <li>• Dimensions: 4 DIN modules</li> </ul>
<b>Supply</b>	<ul style="list-style-type: none"> <li>• Via bus EIB/KNX cable: 21 ÷ 32 Vdc</li> <li>• Input power supply: 230 Vac 50/60 Hz</li> </ul>
<b>Connections</b>	<ul style="list-style-type: none"> <li>• Power supply &amp; load cable: max 2,5 mm<sup>2</sup></li> <li>• Local bus length: max 2 m between 2 modules</li> </ul>
<b>Output rate</b>	<ul style="list-style-type: none"> <li>• Incandescent or halogen lamps: 20-700 W</li> <li>• Ferromagnetic transformer 20-700 VA</li> <li>• Electronic transformer: 20-700 VA</li> <li>• Dimmable LED Lamps: Max 160 W</li> <li>• Compact fluorescent lamps (ESL/CFL): Max 160 W</li> </ul>

## Order Codes

**DM01D01KNX**  
Universal Dimmer 1 Channel 700 W  
Master

**DM01D01ACC**  
Universal Dimmer 1 Channel 700 W  
Slave

# Universal Dimmer

2 CHANNELS X 300 W

DM02A02KNX is a KNX universal power dimmer 2 channels with automatic identification of load type and with settable parameters to optimize control of different lamps like LED, incandescent and halogen, CFL dimmable lights, low voltage lamps with electronic or ferromagnetic transformer.

The 2 channels can be used independently or combined in pair to drive higher power loads; always respect the maximum power values indicated in the table of this instruction sheet and check in the handbook how to configure the outputs as combined in ETS. To define the maximum load and in particular the maximum number of lamps that can be connected, the DimmerLoadTester software is available; with it is possible to analyze the peak absorption of a single lamp and calculate the maximum number of lamps that can be connected.

Load control is possible in leading and trailing edge.



## Technical Features

<b>Mechanical data</b>	• Dimensions: 4 DIN modules		
<b>Supply</b>	• Via bus EIB/KNX cable: 21 ÷ 32 Vdc • Input power supply: 230 Vac 50/60 Hz		
<b>Output rate</b>		Single	Paired
	Incandescent or halogen lamps (230 V~ 50/60 Hz) 300 W 600 W RC LIN	300 W	600 W
	Ferromagnetic transformer (Halogen lamps 12/24 V ~ 50/60 Hz) 200 VA 400 VA L (1) LIN	200 VA	400 VA
	Electronic transformers (Halogen lamps 12/24 V ~ 50/60 Hz)	60 VA	100 VA
	Dimmable LED lamps (230 V~ 50/60 Hz) - L	60 W	100 W
	Dimmable LED lamps (230 V~ 50/60 Hz) - RC	120 W	200 W
	Compact Fluorescent Lamps (ESL/CFL)	60 W	100 W

## Order Codes

**DM02A02KNX**  
Universal DIN Dimmer 2 Channels x 300 W


# Universal Dimmer

4 CHANNELS X 300 W

DM04A02KNX is a KNX universal power dimmer 4-channels with automatic identification of load type and with settable parameters to optimize control of different lamps like LED, incandescent and halogen, CFL dimmable lights, low voltage lamps with electronic or ferromagnetic transformer.

The 4 channels can be used independently or combined in pair (1+2 and 3+4) to drive higher power loads; always respect the maximum power values indicated in the table of this instruction sheet and check in the handbook how to configure the outputs as combined in ETS. To define the maximum load and in particular the maximum number of lamps that can be connected, the DimmerLoadTester software is available; with it is possible to analyze the peak absorption of a single lamp and calculate the maximum number of lamps that can be connected.

Load control is possible in leading and trailing edge.

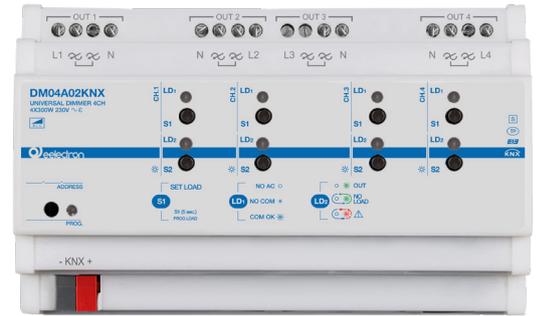

## Technical Features

<b>Mechanical data</b>	• Dimensions: 8 DIN modules		
<b>Supply</b>	<ul style="list-style-type: none"> <li>• Via bus EIB/KNX cable: 21 ÷ 32 Vdc</li> <li>• Input power supply: 230 Vac 50/60 Hz</li> </ul>		
<b>Output rate</b>		Single	Paired
	Incandescent or halogen lamps (230 V~ 50/60 Hz) 300 W 600 W RC LIN	300 W	600 W
	Ferromagnetic transformer (Halogen lamps 12/24 V ~ 50/60 Hz) 200 VA 400 VA L (1) LIN	200 VA	400 VA
	Electronic transformers (Halogen lamps 12/24 V ~ 50/60 Hz)	60 VA	100 VA
	Dimmable LED lamps (230 V~ 50/60 Hz) - L	60 W	100 W
	Dimmable LED lamps (230 V~ 50/60 Hz) - RC	120 W	200 W
	Compact Fluorescent Lamps (ESL/CFL)	60 W	100 W

## Order Codes

**DM04A02KNX**  
 Universal DIN Dimmer 4 Channels x 300 W


# Led Dimmer

## CV LED DIMMER 4 CHANNELS KNX

DL04A01KNX is a dimming actuator for LED in DC with constant voltage (CV). The device allows to drive 4 independent channels or 1 RGB channel and 1 single color channel or 1 channel RGBW. Module can be powered from 12 to 48 Vdc and consequently can manage the outputs (LED strips) with voltage from 12 to 48 Vdc. The device includes a 16 A relay, suitable for switching capacitive loads, that allows a complete shutdown of the external power supply when all loads are switched off (for example at night) ensuring the maximization of the energy saving.

Available functions include block, logic, scenes, color sequences, etc.

Device is equipped with KNX communication interface.

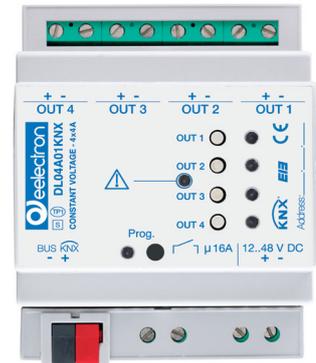

### Technical Features

<b>Mechanical data</b>	<ul style="list-style-type: none"> <li>• Dimensions: 4 DIN modules</li> </ul>
<b>Supply</b>	<ul style="list-style-type: none"> <li>• From KNX bus 21 ÷ 32 Vdc SELV</li> <li>• AUX input to supply LED's : 12 ÷ 48 Vdc ± 10%</li> <li>• Current Consumption ≤16 A</li> </ul>
<b>Output rate</b>	<ul style="list-style-type: none"> <li>• Max output for each channel: 4 A</li> <li>• PWM frequency: 200 / 260 / 400 Hz</li> </ul>
<b>Hardware protection</b>	<ul style="list-style-type: none"> <li>• Over current</li> <li>• Over temperature</li> <li>• Reverse Polarity</li> </ul>

### Order Codes

**DL04A01KNX**  
Led Dimmer CH 4 Channels KNX

# Dimmer

4 CHANNELS X 1-10 V

DM04D01KNX is a KNX 4 channel dimmer with switching and brightness setting for lamps with operating devices with 1-10 V interface.

- Manual switching of the relays is independent of the Bus
- Switching of capacitive loads and the resulting high switchon currents
- Flexible assignment of control inputs to switching outputs, e.g. to control RGBW lamps
- Operation of the switching outputs as a switching actuator
- Connection of various external conductors
- No additional power supply necessary
- Feedback of switching state and brightness value
- Switch position display
- Burnin function for fluorescent lamps
- Switchon and dimming behaviour can be set
- Time functions: switchon delay, switchoff, delay, staircase lighting timer with run-on time
- Integration into light scenes
- Operating hours counter



## Technical Features

<b>Mechanical data</b>	<ul style="list-style-type: none"> <li>• Dimensions: 4 DIN modules</li> </ul>
<b>Supply</b>	<ul style="list-style-type: none"> <li>• Via bus EIB/KNX cable: 21 ÷ 32 Vdc</li> </ul>
<b>Output rate</b>	<ul style="list-style-type: none"> <li>• Fluorescent lamps 16 AX</li> <li>• Minimum switching current 100 mA</li> <li>• Switch on current 150 µs 600 A</li> <li>• Switch on current 600 µs 300 A</li> <li>• Ohmic load 3680 W</li> <li>• Capacitive load 16 A / 200 µF</li> <li>• Incandescent lamps 3680 W</li> <li>• HV halogen lamps 3680 W</li> <li>• LV halogen lamps with inductive transformer 2000 VA</li> <li>• LV halogen lamps with Tronic transformer 2500 W</li> <li>• Fluorescent lamps T5/T8 uncompensated 3680 W</li> <li>• Parallel compensated 2500 W / 200 µF</li> <li>• Twinlamp circuit 3680 W / 200 µF</li> <li>• Compact fluorescent lamps uncompensated 3680 W</li> <li>• Parallel compensated 2500 W / 200 µF</li> <li>• Mercury vapour lamps uncompensated 3680 W</li> <li>• Parallel compensated 3680 W / 200 µF</li> </ul>

## Order Codes

**DM04D01KNX**  
4 Channels x 1-10 V

# Valves / Loads Actuator

8 IN / 4 + 4 OUT

The HA88B01KNX device is EIB/KNX DIN rail actuator with 16 A - 230 Vac relay outputs; the device also include inputs for dry contacts (potential-free).

The outputs can be configured as:

- 4 outputs for light / load control
- 8 (4) channels for valve control in ON / OFF or PWM
- 4 (2) channels for 3-points valve control
- 1 fan coil actuators 2-pipes with 3 speeds
- 1 fan coil actuators 4-pipes with 3 speeds

Inputs from 1 to 4 can be configured as outputs to activate single signaling LEDs (see eelectron leds code LD00A01ACC / LD00A11ACC) or can be configured as analogue inputs for the connection of NTC temperature probes (see eelectron probes code TS00A01ACC / TS00B01ACC ) with which to send 4 temperature measurements on the bus or to manage 4 complete thermostat modules.

Each thermostat module manages 2 stages with an integrated PI controller for controlling heating and cooling equipment, valves, 2 and 4 pipe fan coils, etc. Additional 4 thermostat modules are available in the device for a total of 8. Moreover, 4 logic blocks are available to implement simple expressions with logical/threshold operator or complex expressions with algebraic and conditional operators; It's possible to use predefined algorithms as proportional controls of temperature and humidity or dew point calculation. Device is equipped with KNX communication interface and is intended for installation on DIN rail in LV distribution cabinets.



## Technical Features

<b>Mechanical data</b>	<ul style="list-style-type: none"> <li>• Dimensions: 4 DIN modules</li> </ul>
<b>Supply</b>	<ul style="list-style-type: none"> <li>• Via bus EIB/KNX cable: 21 ÷ 32 Vdc</li> </ul>
<b>Input - digital mode</b>	<ul style="list-style-type: none"> <li>• For free potential contacts (dry contacts)</li> <li>• Max. length of Connecting Cables ≤ 30 m (twisted cable)</li> </ul>
<b>Input - analog mode for temperature probe</b>	<p>For NTC temperature probe eelectron code:</p> <ul style="list-style-type: none"> <li>• TS01A01ACC (range from -20°C to +100°C)</li> <li>• TS01B01ACC (range from -50°C to +60°C)</li> <li>• TS01D01ACC (range from -40°C to 125°C)</li> <li>• Max. length of Connecting Cable: ≤ 30 m (twisted cable)</li> </ul>
<b>Output rate - triac</b>	<ul style="list-style-type: none"> <li>• 24 ÷ 230 Vac 50/60 Hz</li> </ul>
<b>Output rate - relay</b>	<ul style="list-style-type: none"> <li>• 16 A cos φ 1 - 230 Vac</li> <li>• 8 A cos φ 0.6 - 230 Vac</li> <li>• Max current relay output: 16 A/16 AX (140 μF)</li> <li>• Max peak current: 165 A / 20 ms</li> <li>• Incandescent lamps: max 10 A</li> <li>• Motors e motor reduction units: max 10 A</li> <li>• Fluorescent lamps (max 140 μF) max 3A (700 W)</li> <li>• Electronic ballast: max 6 A</li> <li>• LED's lamps drivers: always check that the maximum peak current drawn by led power supply is lower than maximum peak current allowed for the relay</li> </ul>

## Order Codes

**HA88B01KNX**  
Valves / Loads Actuator  
8 IN / 4 + 4 OUT

# Fan Coil Controller

Universal Fancoil Controller 0-10 V

The TC57A01KNX device is a DIN rail EIB / KNX actuator for fan coil control with 3 x 0-10 V outputs and 3x16 A relays. Two 0-10 V outputs are dedicated to proportional valves, variable fan speeds can be controlled with a third 0-10 V output or with 3 relays on board. If the 3 relays are not used for speeds, they can switch lights or other loads. An analogue input is also available for reading 0-10 V or 4-20 mA signals in order to interface temperature, humidity or CO<sub>2</sub> probes; the third 0-10 V output can also be configured as analog input. Five digital inputs are available for dry contact reading for the connection of buttons, window contacts, alarms; Two inputs can be connected to NTC temperature probes (eelectron codes TS00A01ACC and TS00B01ACC).

The internal logic can manage a 2-4 tube fan coil with an internal 2-stage PI algorithm. A sophisticated parameterization allows its use in modern systems that require a differentiation of the behaviour between speed and valves (independent regulation differentials), ventilation to avoid air stratification, logics for efficient maintenance of comfort and energy saving.



## Technical Features

<b>Mechanical data</b>	<ul style="list-style-type: none"> <li>• Dimensions: 6 DIN modules</li> </ul>
<b>Supply</b>	<ul style="list-style-type: none"> <li>• Via bus EIB/KNX cable: 21 ÷ 32 Vdc</li> </ul>
<b>Input - digital mode</b>	<ul style="list-style-type: none"> <li>• For free potential contacts (dry contacts)</li> <li>• Max. length of Connecting Cables ≤ 30 m (twisted cable)</li> </ul>
<b>Input - analog mode for temperature probe</b>	For NTC temperature probe eelectron code: <ul style="list-style-type: none"> <li>• TS01A01ACC (range from -20°C to +100°C)</li> <li>• TS01B01ACC (range from -50°C to +60°C)</li> <li>• TS01D01ACC (range from -40°C to 125°C)</li> <li>• Max. length of Connecting Cable: ≤ 30m (twisted cable)</li> </ul>
<b>Input - analog mode for general purpose</b>	<ul style="list-style-type: none"> <li>• 0 - 10 V / 4 - 20 mA</li> </ul>
<b>Output rate - relay</b>	<ul style="list-style-type: none"> <li>• 16 A cos φ 1 - 230 Vac</li> <li>• 8 A cos φ 0.6 - 230 Vac</li> <li>• Resistive load: max 16 A</li> <li>• Incandescent lamps: max 8 A</li> <li>• Fluorescent lamps (max 140 μF) max 3 A (700 W)</li> </ul>
<b>Output rate - analog mode for general purpose</b>	<ul style="list-style-type: none"> <li>• 0 - 10 V, max 2.5 mA</li> </ul>

## Order Codes

**TC57A01KNX**  
 Universal Fan Coil Controller  
 3 X 0-10 V | 5 IN - 3 OUT

# Fan Coil Controller Plus

Universal Fancoil Controller Plus 4 X 0-10 V | 5 IN - 3 OUT

The TC57B01KNX device is a DIN rail EIB / KNX actuator for fan coil control with 4 x 0-10 V outputs and 3x16 A relays. Two 0-10 V outputs are dedicated to proportional valves, variable fan speeds can be controlled with a third 0-10 V output or with 3 relays on board. If the 3 relays are not used for speeds, they can switch lights or other loads. An analogue input (IN 5) is also available for reading 0-10 V or 4-20 mA signals in order to interface temperature, humidity or CO<sub>2</sub> probes; the fourth 0-10 V output can also be configured as analog input. Five digital inputs are available for dry contact reading for the connection of buttons, window contacts, alarms; Two inputs can be connected to NTC temperature probes (eelectron codes TS00A01ACC and TS00B01ACC).

The internal logic can manage a 2-4 tube fan coil with an internal 2-stage PI algorithm. A sophisticated parameterization allows its use in modern systems that require a differentiation of the behaviour between speed and valves (independent regulation differentials), ventilation to avoid air stratification, logics for efficient maintenance of comfort and energy saving.



## Technical Features

<b>Mechanical data</b>	<ul style="list-style-type: none"> <li>• Dimensions: 6 DIN modules</li> </ul>
<b>Supply</b>	<ul style="list-style-type: none"> <li>• Via bus EIB/KNX cable: 21 ÷ 32 Vdc</li> </ul>
<b>Input - digital mode</b>	<ul style="list-style-type: none"> <li>• For free potential contacts (dry contacts)</li> <li>• Max. length of Connecting Cables ≤ 30 m (twisted cable)</li> </ul>
<b>Input - analog mode for temperature probe</b>	For NTC temperature probe eelectron code: <ul style="list-style-type: none"> <li>• TS01A01ACC (range from -20°C to +100°C)</li> <li>• TS01B01ACC (range from -50°C to +60°C)</li> <li>• TS01D01ACC (range from -40°C to 125°C)</li> <li>• Max. length of Connecting Cable: ≤ 30m (twisted cable)</li> </ul>
<b>Input - analog mode for general purpose</b>	<ul style="list-style-type: none"> <li>• 0 - 10 V / 4 - 20 mA</li> </ul>
<b>Output rate - relay</b>	<ul style="list-style-type: none"> <li>• 16 A cos φ 1 - 230 Vac</li> <li>• 8 A cos φ 0.6 - 230 Vac</li> <li>• Resistive load: max 16 A</li> <li>• Incandescent lamps: max 8 A</li> <li>• Fluorescent lamps (max 140 μF) max 3 A (700 W)</li> </ul>
<b>Output rate - analog mode for general purpose</b>	<ul style="list-style-type: none"> <li>• 0 - 10 V, max 2.5 mA</li> </ul>

## Order Codes

**TC57B01KNX**  
 Universal Fan Coil Controller Plus  
 4 X 0-10 V | 5 IN - 3 OUT

# Heating Actuator


4 IN / 4 OUT

The HA04A01KNX device is a EIB/KNX DIN rail actuators for electrothermal valves with 4 Triac outputs at 24 ÷ 230 Vac; the devices include 4 inputs for dry (potential-free) contacts. The outputs can be configured as:

- 4 channels for valve control in ON / OFF or PWM
- 2 channels for 3-points valve control

Inputs can be connected to buttons or switches (potential-free) and can be used for on / off commands, dimming, shutters or blinds / scenarios, sequences, step commands, etc. Inputs from 1 to 4 can be configured as outputs to activate single signalling LEDs (see eelectron leds code LD00A01ACC / LD00A11ACC) or can be configured as analogue inputs for the connection of NTC temperature probes (see eelectron probes code TS00A01ACC / TS00B01ACC ) with which to send 4 temperature measurements on the bus or to manage 4 complete thermostat modules. Each thermostat module manages 2 stages with an integrated PI controller for controlling heating and cooling equipment, valves, 2 and 4 pipe fan coils, etc. Additional 4 thermostat modules are available in the device for a total of 8. Moreover, 8 logic blocks are available to implement simple expressions with logical/threshold operator or complex expressions with algebraic and conditional operators; It's possible to use predefined algorithms as proportional controls of temperature and humidity or dew point calculation.

Device is equipped with KNX communication interface and is intended for installation on DIN rail in LV distribution cabinets.

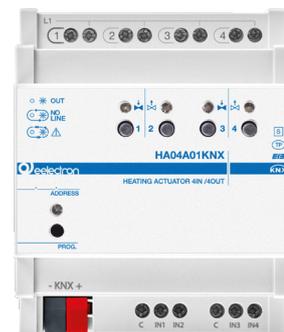

## Technical Features

<b>Mechanical data</b>	<ul style="list-style-type: none"> <li>• Dimensions: 4 DIN Modules</li> </ul>
<b>Supply</b>	<ul style="list-style-type: none"> <li>• Via bus EIB/KNX cable: 21 ÷ 32 Vdc</li> </ul>
<b>Input - digital mode</b>	<ul style="list-style-type: none"> <li>• For free potential contacts (dry contacts)</li> <li>• Max. length of Connecting Cables ≤ 30 m (twisted cable)</li> </ul>
<b>Input - analog mode for temperature probe</b>	For NTC temperature probe eelectron code: <ul style="list-style-type: none"> <li>• TS01A01ACC (range from -20°C to +100°C)</li> <li>• TS01B01ACC (range from -50°C to +60°C)</li> <li>• TS01D01ACC (range from -40°C to 125°C)</li> <li>• Max. length of Connecting Cable: ≤ 30 m (twisted cable)</li> </ul>
<b>Output rate - triac</b>	<ul style="list-style-type: none"> <li>• 24 ÷ 230 Vac 50/60 Hz</li> </ul>

## Order Codes

**HA04A01KNX**  
Actuator for Electrothermal Valves 4  
Inputs / 4 Outputs

# Heating Actuator


8 IN / 8 OUT

The HA08A01KNX device is a EIB/KNX DIN rail actuators for electrothermal valves with 8 Triac outputs at 24 ÷ 230 Vac; the devices include 8 inputs for dry (potential-free) contacts. The outputs can be configured as:

- 8 channels for valve control in ON / OFF or PWM
- 4 channels for 3-points valve control

Inputs can be connected to buttons or switches (potential-free) and can be used for on / off commands, dimming, shutters or blinds / scenarios, sequences, step commands, etc. Inputs from 1 to 4 can be configured as outputs to activate single signaling LEDs (see eelectron leds code LD00A01ACC / LD00A11ACC) or can be configured as analogue inputs for the connection of NTC temperature probes (see eelectron probes code TS00A01ACC / TS00B01ACC ) with which to send 4 temperature measurements on the bus or to manage 4 complete thermostat modules. Each thermostat module manages 2 stages with an integrated PI controller for controlling heating and cooling equipment, valves, 2 and 4 pipe fan coils, etc. Additional 4 thermostat modules are available in the device for a total of 8. Moreover, 8 logic blocks are available to implement simple expressions with logical/threshold operator or complex expressions with algebraic and conditional operators; It's possible to use predefined algorithms as proportional controls of temperature and humidity or dew point calculation.

Device is equipped with KNX communication interface and is intended for installation on DIN rail in LV distribution cabinets.

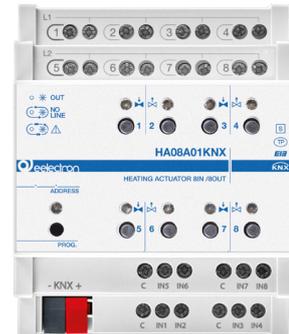

## Technical Features

<b>Mechanical data</b>	<ul style="list-style-type: none"> <li>• Dimensions: 4 DIN Modules</li> </ul>
<b>Supply</b>	<ul style="list-style-type: none"> <li>• Via bus EIB/KNX cable: 21 ÷ 32 Vdc</li> </ul>
<b>Input - digital mode</b>	<ul style="list-style-type: none"> <li>• For free potential contacts (dry contacts)</li> <li>• Max. length of Connecting Cables ≤ 30 m (twisted cable)</li> </ul>
<b>Input - analog mode for temperature probe</b>	For NTC temperature probe eelectron code: <ul style="list-style-type: none"> <li>• TS01A01ACC (range from -20°C to +100°C)</li> <li>• TS01B01ACC (range from -50°C to +60°C)</li> <li>• TS01D01ACC (range from -40°C to 125°C)</li> <li>• Max. length of Connecting Cable: ≤ 30 m (twisted cable)</li> </ul>
<b>Output rate - triac</b>	<ul style="list-style-type: none"> <li>• 24 ÷ 230 Vac 50/60 Hz</li> </ul>

## Order Codes

### HA08A01KNX

Actuator for Electrothermal Valves 8 Inputs / 8 Outputs

# Motorized valve drive

The device VD21A01KNX is a motorized valve drive for heating or cooling valves; Screw onto valve head. The valve drive is matched to standard valve base types using an M30×1.5 connection. In the basic setting, the valve drive fits the valve bases of make Heimeier. Adapters must be used for valve bases of other manufacturers. No function guarantee can be accepted for this.

## Product characteristics

- Integrated temperature sensor
- Room temperature control
- Mechanical display of the valve stroke
- Automatic detection of the valve stroke
- An input, which can be used as a binary input
- Use in heating circuit distributor possible
- Integrated bus coupling unit
- Valve protection function



## Technical Features

<b>Mechanical data</b>	<ul style="list-style-type: none"> <li>• L×A×H 76×47×85 mm</li> </ul>
<b>Supply</b>	<ul style="list-style-type: none"> <li>• Via bus EIB/KNX cable: 21 ÷ 32 Vdc</li> </ul>
<b>Connecting cable</b>	<ul style="list-style-type: none"> <li>• Cable type: J-YY 1×2×0,6 mm</li> <li>• Cable length: 1 m</li> <li>• Total length per line: 30 m</li> <li>• Number of drives per line: 30</li> </ul>
<b>Connection cable, binary input/ remote sensor</b>	<ul style="list-style-type: none"> <li>• Poll voltage, extension inputs: approx. 3,3 V</li> <li>• Cable length: 10 m</li> <li>• Single stranded: 0,08 ... 1,5 mm<sup>2</sup></li> <li>• Finely stranded without conductor sleeve: 0,08 mm<sup>2</sup> ... 1,0 mm<sup>2</sup></li> <li>• Finely stranded with conductor sleeve: 0,14 mm<sup>2</sup> ... 0,5 mm<sup>2</sup></li> </ul>


## Order Codes

**VD21A01KNX**  
Motorized valve drive

# Analog / Digital Interface

ANALOG / DIGITAL MODULE 8 INPUT - 4 LED OUTPUT - 4 THERMOSTATS

AD84C01KNX module includes 4 digital inputs to interface dry contacts and 4 analog or digital inputs for dry contacts or temperature sensors and 4 LED outputs. Digital inputs can interface sensors, traditional buttons, etc; 4 low voltage/current outputs can drive LED for synoptics panels or switches. Inputs 5 ÷ 8, set as analog inputs, can enable up to 4 temperature probes (with On/Off threshold) or 4 thermostats to control heating and cooling equipments, valves, 2 and 4 pipes fan coils; etc. Device is equipped with KNX communication interface.

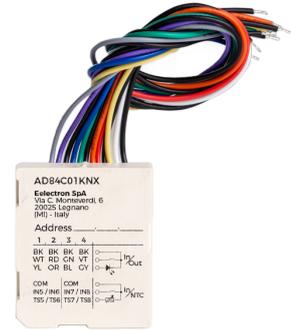

## Technical Features

<b>Mechanical data</b>	<ul style="list-style-type: none"> <li>Dimensions: (H x W x D) : 43 x 36 x 24 mm</li> </ul>
<b>Mounting</b>	<ul style="list-style-type: none"> <li>Inwall</li> </ul>
<b>Supply</b>	<ul style="list-style-type: none"> <li>Via bus EIB/KNX cable: 21 ÷ 32 Vdc</li> </ul>
<b>Input - digital mode</b>	<ul style="list-style-type: none"> <li>For free potential contacts (dry contacts)</li> <li>Max. length of Connecting Cables ≤ 30 m (twisted cable)</li> </ul>
<b>Input - analog mode for temperature probe</b>	For NTC temperature probe eelectron code: <ul style="list-style-type: none"> <li>TS01A01ACC (range from -20°C to +100°C)</li> <li>TS01B01ACC (range from -50°C to +60°C)</li> <li>TS01D01ACC (range from -40°C to 125°C)</li> <li>Max. length of Connecting Cable: ≤ 30 m (twisted cable)</li> </ul>
<b>Output rate - LED</b>	For LED use Eelectron LED code: <ul style="list-style-type: none"> <li>LD00A01ACC / LD00A11ACC) 0.5 mA / 3.3 V</li> </ul>

## Order Codes

### AD84C01KNX

Analog / Digital Module 8 Input - 4 Led Output - 4 Thermostats

# Push Button Interface

2 IN - 2 OUT LED / 4 IN - 4 OUT LED / 6 IN - 2 OUT LED

The device is dedicated to interface dry contacts with 2,4 or 6 input channels, such as sensors, conventional push buttons and 2 or 4 low voltage/current output channels to drive LED signal indicator lamps. These devices are extremely compact size (only 34 x 34 x 11 mm) and can also be used in installations where the inwall space available is reduced.

The digital inputs can interface sensors, traditional buttons, etc; the 4 low-voltage output channels can drive LEDs for synoptic panels or switches. Outputs can drive low voltage LED; if possible use high-efficiency LED Eelectron cod. LD00A01ACC (blue color) or LD00A11ACC (white color).

There are also 8 blocks of logic functions freely configurable by ETS (6 blocks available on IO62D01KNX). Device is equipped with KNX communication interface.



## Technical Features

<b>Mechanical data</b>	<ul style="list-style-type: none"> <li>• Dimensions: (H x W x D) : 34 x 34 x 11 mm</li> </ul>
<b>Mounting</b>	<ul style="list-style-type: none"> <li>• Inwall</li> </ul>
<b>Supply</b>	<ul style="list-style-type: none"> <li>• Via bus EIB/KNX cable: 21 ÷ 32 Vdc</li> </ul>
<b>Input - digital mode</b>	<ul style="list-style-type: none"> <li>• For free potential contacts (dry contacts)</li> <li>• Max. length of Connecting Cables ≤ 30 m (twisted cable)</li> </ul>
<b>Output rate - LED</b>	For LED use Eelectron LED code: <ul style="list-style-type: none"> <li>• LD00A01ACC / LD00A11ACC 0.5 mA / 3.3 V</li> </ul>

## Order Codes

### IO22D01KNX

Push Button interface inwall 2 in - 2 led out module

### IO44D01KNX

Push Button interface inwall 4 in - 4 led out module

### IO62D01KNX

Push Button interface inwall 6 in - 2 led out module

# DALI Gateway

KNX - DALI

The DALI Gateway is an interface between a KNX installation and a DALI lighting system (Digital Addressable Lighting Interface). The DALI Gateway allows the switching and dimming of a maximum of 64 lights with a DALI operating device (e.g. electronic ballast). Up to 6 different addressing types of the DALI Gateway allow group orientated and individually-addressable control of DALI lights via KNX telegrams. This allows the integration of room-specific light controls, for example, of open-plan offices, multipurpose spaces, production facilities, training and conference rooms into the higher-level of KNX building management.

Depending on the configuration, up to 32 independent DALI groups are available for group addressing. For alternative control, these can be supplemented with 64 individually-addressable DALI device channels, as necessary. Optionally, master control of all connected DALI components is possible (broadcast). This means that there is no need to commission DALI, the lighting systems with few functions can be started up quickly and easily (simplified configuration without DALI commissioning).

The DALI Gateway is supplied completely via the mains voltage connection and makes the DALI system voltage (typically 16 Vdc) available. The device is designed for mounting on DIN rails.



## Technical Features

<b>Mechanical data</b>	<ul style="list-style-type: none"> <li>• Dimensions: 4 DIN modules</li> </ul>
<b>Supply</b>	<ul style="list-style-type: none"> <li>• Via bus EIB/KNX cable: 21 ÷ 32 Vdc</li> <li>• Auxiliary supply: 110 ÷ 240 Vac (50/60 Hz)</li> </ul>
<b>Output</b>	<ul style="list-style-type: none"> <li>• Control of up to 64 DALI devices</li> <li>• Automatic ECG replacement</li> <li>• Individual, group or central addressing</li> <li>• Emergency lighting management</li> <li>• Effect control for dynamic lighting effects or colour games</li> <li>• Manual operation of the DALI groups</li> <li>• Disabling function for each DALI group</li> <li>• Operating hours counter</li> </ul>

## Order Codes

**IC00P01DAL**  
Gateway KNX/DALI

# DALI Gateway

KNX - DALI

The DALI Gateway is an interface between a KNX installation and a DALI lighting system (Digital Addressable Lighting Interface). The DALI Gateway allows the switching and dimming of a maximum of 64 lights with a DALI operating device (e.g. electronic ballast). Up to 6 different addressing types of the DALI Gateway allow group orientated and individually-address control of DALI lights via KNX telegrams. This allows the integration of room-specific light controls, for example, of open-plan offices, multipurpose spaces, production facilities, training and conference rooms into the higher-level of KNX building management.

Depending on the configuration, up to 32 independent DALI groups are available for group addressing. For alternative control, these can be supplemented with 64 individually-addressable DALI device channels, as necessary. Optionally, master control of all connected DALI components is possible (broadcast). This means that there is no need to commission DALI, the lighting systems with few functions can be started up quickly and easily (simplified configuration without DALI commissioning).

The DALI Gateway is supplied completely via the mains voltage connection and makes the DALI system voltage (typically 16 Vdc) available. The device is designed for mounting on DIN rails.



## Technical Features

<b>Mechanical data</b>	<ul style="list-style-type: none"> <li>• Dimensions: 4 DIN modules</li> </ul>
<b>Supply</b>	<ul style="list-style-type: none"> <li>• Via bus EIB/KNX cable: 21 ÷ 32 Vdc</li> <li>• Auxiliary supply: 110 ÷ 240 Vac (50/60 Hz)</li> </ul>
<b>Output</b>	<ul style="list-style-type: none"> <li>• Control of up to 64 DALI devices</li> <li>• Automatic ECG replacement</li> <li>• Individual, group or central addressing</li> <li>• Emergency lighting management</li> <li>• Effect control for dynamic lighting effects or colour games</li> <li>• Manual operation of the DALI groups</li> <li>• Disabling function for each DALI group</li> <li>• Operating hours counter</li> </ul>

## Order Codes

**IC00P02DAL**  
Gateway KNX/DALI - tunable white

# DALI Gateway

KNX - DALI - 2 CHANNELS

The DALI Gateway is an interface between a KNX installation and a DALI lighting system (Digital Addressable Lighting Interface). The DALI Gateway allows the switching and dimming of a maximum of 64 lights with a DALI operating device (e.g. electronic ballast). Up to 6 different addressing types of the DALI Gateway allow group orientated and individually-addressable control of DALI lights via KNX telegrams. This allows the integration of room-specific light controls, for example, of open-plan offices, multipurpose spaces, production facilities, training and conference rooms into the higher-level of KNX building management.

Depending on the configuration, up to 32 independent DALI groups are available for group addressing. For alternative control, these can be supplemented with 64 individually-addressable DALI device channels, as necessary. Optionally, master control of all connected DALI components is possible (broadcast). This means that there is no need to commission DALI, the lighting systems with few functions can be started up quickly and easily (simplified configuration without DALI commissioning).

The DALI Gateway is supplied completely via the mains voltage connection and makes the DALI system voltage (typically 16 Vdc) available. The device is designed for mounting on DIN rails.



## Technical Features

<b>Mechanical data</b>	<ul style="list-style-type: none"> <li>• Dimensions: 4 DIN modules</li> </ul>
<b>Supply</b>	<ul style="list-style-type: none"> <li>• Via bus EIB/KNX cable: 21 ÷ 32 Vdc</li> <li>• Auxiliary supply: 110 ÷ 240 Vac (50/60 Hz)</li> </ul>
<b>Output</b>	<ul style="list-style-type: none"> <li>• Control of up to 64 DALI devices</li> <li>• Automatic ECG replacement</li> <li>• Individual, group or central addressing</li> <li>• Emergency lighting management*</li> <li>• Effect control for dynamic lighting effects or colour games</li> <li>• Manual operation of the DALI groups</li> <li>• Disabling function for each DALI group</li> <li>• Operating hours counter</li> </ul>

## Order Codes

**IC02D01DAL**  
Gateway KNX DALI TW 2 Ch

# DMX Gateway

KNX - DMX

Interface between KNX bus and DMX512 bus. Combines devices for building automation with control devices dedicated to lighting and special effects. One-way gateway that receives telegrams from the KNX bus and data bus to DMX512. Scenarios of all 512 channels can be configured and managed with KNX group addresses.



## Technical Features

<b>Mechanical data</b>	<ul style="list-style-type: none"> <li>• Dimensions: 6 DIN modules</li> </ul>
<b>Supply</b>	<ul style="list-style-type: none"> <li>• Via bus EIB/KNX cable: 21 ÷ 32 Vdc</li> <li>• Auxiliary supply: 9-30 Vdc, 100 mA, separated</li> </ul>
<b>Output</b>	<ul style="list-style-type: none"> <li>• DMX / RS485 bus</li> </ul>

## Order Codes

**IC00B01DMX**  
Gateway KNX-DMX

# Weather Station Plus

KNX

Measurement and evaluation of weather data: Wind speed, Wind direction, Precipitation, Brightness, Global radiation Twilight, Temperature, Relative air humidity and Air pressure

- Installation on the outside of buildings, preferable in the roof and facade area
- Operation with additional power supply
- Product characteristics
- Integrated GPS/GLONASS receiver for automated positioning
- Calculation of additional weather data: Absolute air humidity, chill temperature, comfort
- Function for shading control
- Integrated KNX bus coupling unit
- Measurement data acquisition and limit value monitoring
- Software logic modules for linking events
- Integrated heating



## Technical Features

<b>Mechanical data</b>	<ul style="list-style-type: none"> <li>• Dimensions: ØxH 130x68 mm</li> </ul>
<b>Supply</b>	<ul style="list-style-type: none"> <li>• Via bus EIB/KNX cable: 21 ÷ 32 Vdc</li> <li>• Auxiliary power supply: 21 ÷ 32 Vadc, Current consumption 100 ÷ 400 mA (dependent on the weather)</li> </ul>
<b>Degree of protection</b>	<ul style="list-style-type: none"> <li>• IP44</li> </ul>

## Order Codes

**WS00A01KNX**  
Weather Station Plus KNX

# KNX Basic Presence Detector


The BASIC version of Eelectron presence detectors range is suitable for ceiling mounting up to 4 m height.

Presence detection, based on a passive infrared sensor has 5 independently configurable channels with different functions that can be activated.

The device has a rear connector with 3 digital inputs that can be connected to buttons or switches free of potential and used for on / off commands, dimming, shutters or blinds / scenarios, sequences, step commands, etc. One of the 3 inputs can be configured as analogue for the connection of NTC temperature probes (see eelectron probes code TS00A01ACC / TS00B01ACC) with which to send the temperature measurement on the bus.

12 logic blocks are available to implement simple expressions with logical or threshold operator or complex expressions with algebraic and conditional operators.

The device also integrates the "Virtual Holder Logic"; the field of application is the hotel room: through a magnetic sensor installed on the door and connected to a digital input (also to the sensor itself), accurate presence information is managed. The presence detection solution can deduce the presence of people in the room using one or more dedicated sensors. It also detects an unexpected presence and is able to differentiate more behaviors.

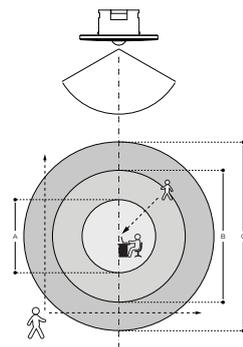

Detection range

BASIC - STANDARD - MULTI - SPACE			
h	A	B	C
2.5 m	3.8 m	7.0 m	10.0 m
3.0 m	4.0 m	8.0 m	12.0 m
3.5 m	5.0 m	9.0 m	13.0 m
4.0 m	6.0 m	11.0 m	14.0 m

- A | Person working at the desk
- B | Person moving towards the sensor
- C | Person moving sideways with respect to the sensor

## Technical Features

<b>Mechanical data</b>	<ul style="list-style-type: none"> <li>Dimensions: Ø x H 81 x 37 mm</li> </ul>
<b>Mounting</b>	<ul style="list-style-type: none"> <li>Ceiling mounting, flush-mounted, surface installation</li> </ul>
<b>Supply</b>	<ul style="list-style-type: none"> <li>Via bus EIB/KNX cable: 21 ÷ 32 Vdc</li> </ul>
<b>Input - digital mode</b>	<ul style="list-style-type: none"> <li>For free potential contacts (dry contacts)</li> <li>Max. length of Connecting Cables ≤ 30 m (twisted cable)</li> </ul>
<b>Input - analog mode for temperature probe</b>	For NTC temperature probe eelectron code: <ul style="list-style-type: none"> <li>TS01A01ACC (range from -20°C to +100°C)</li> <li>TS01B01ACC (range from -50°C to +60°C)</li> <li>TS01D01ACC (range from -40°C to 125°C)</li> <li>Max. length of Connecting Cable: ≤ 30 m (twisted cable)</li> </ul>

## Order Codes

- PD00E00KNX**  
KNX Presence detector Basic
- PD00E00KNX-3**  
KNX Presence detector Basic - Black
- PD00E00ACC**  
Surface mounting enclosure
- PD00E00ACC-3**  
Surface mounting enclosure - Black
- PD00E01ACC**  
Box mounting frame
- PD00E03ACC**  
Swiss box mounting frame - White
- PD00E03ACC-3**  
Swiss box mounting frame - Black

# KNX Standard Presence Detector


WITH LIGHTING CONTROL

The STANDARD version of Eelectron presence detectors range is suitable for ceiling mounting up to 4 m height and includes a brightness sensor for environmental lighting control. Presence detection, based on a passive infrared sensor, has 5 independently configurable channels with different functions that can be activated: presence with or without brightness control and with automatic or semi-automatic detection; constant brightness independent or presence dependent with automatic or semi-automatic activation.

The device has a rear connector with 3 digital inputs that can be connected to buttons or switches free of potential and used for on / off commands, dimming, shutters or blinds / scenarios, sequences, step commands, etc. One of the 3 inputs can be configured as analogue for the connection of NTC temperature probes (see eelectron probes code TS00A01ACC / TS00B01ACC) with which to send the temperature measurement on the bus. 12 logic blocks are available to implement simple expressions with logical or threshold operator or complex expressions with algebraic and conditional operators.

The device also integrates the "Virtual Holder Logic"; the field of application is the hotel room: through a magnetic sensor installed on the door and connected to a digital input (also to the sensor itself), accurate presence information is managed. The presence detection solution can deduce the presence of people in the room using one or more dedicated sensors. It also detects an unexpected presence and is able to differentiate more behaviors.

The device manages the ambient lighting based on the measured illuminance; it is also possible to enable the logic called "Circadian Rhythm" with which brightness and color temperature are imposed on the basis of predefined curves or on the basis of the real position of the sun during the day with respect to a terrestrial coordinate.

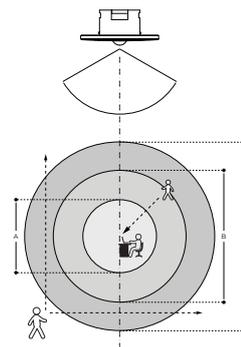

Detection range

BASIC - STANDARD - MULTI - SPACE			
h	A	B	C
2.5 m	3.8 m	7.0 m	10.0 m
3.0 m	4.0 m	8.0 m	12.0 m
3.5 m	5.0 m	9.0 m	13.0 m
4.0 m	6.0 m	11.0 m	14.0 m

- A | Person working at the desk
- B | Person moving towards the sensor
- C | Person moving sideways with respect to the sensor

## Technical Features

<b>Mechanical data</b>	<ul style="list-style-type: none"> <li>Dimensions: Ø x H 81 x 37 mm</li> </ul>
<b>Mounting</b>	<ul style="list-style-type: none"> <li>Ceiling mounting, flush-mounted, surface installation</li> </ul>
<b>Supply</b>	<ul style="list-style-type: none"> <li>Via bus EIB/KNX cable: 21 ÷ 32 Vdc</li> </ul>
<b>Input - digital mode</b>	<ul style="list-style-type: none"> <li>For free potential contacts (dry contacts)</li> <li>Max. length of Connecting Cables ≤ 30 m (twisted cable)</li> </ul>
<b>Input - analog mode for temperature probe</b>	For NTC temperature probe eelectron code: <ul style="list-style-type: none"> <li>TS01A01ACC (range from -20°C to +100°C)</li> <li>TS01B01ACC (range from -50°C to +60°C)</li> <li>TS01D01ACC (range from -40°C to 125°C)</li> <li>Max. length of Connecting Cable: ≤ 30 m (twisted cable)</li> </ul>

## Order Codes

- PD00E01KNX**  
KNX Presence detector Standard with lighting control
- PD00E01KNX-3**  
KNX Presence detector Standard with lighting control - Black
- PD00E00ACC**  
Surface mounting enclosure
- PD00E00ACC-3**  
Surface mounting enclosure - Black
- PD00E01ACC**  
Box mounting frame
- PD00E03ACC**  
Swiss box mounting frame - White
- PD00E03ACC-3**  
Swiss box mounting frame - Black

# KNX High Bay Presence Detector

WITH LIGHTING CONTROL

The HIGH BAY version of Eelectron presence detectors range is suitable for ceiling mounting up to 16 m height and includes a brightness sensor for environmental lighting control. Presence detection, based on a passive infrared sensor, has 5 independently configurable channels with different functions that can be activated: presence with or without brightness control and with automatic or semi-automatic detection; constant brightness independent or presence dependent with automatic or semi-automatic activation.

The device has a rear connector with 3 digital inputs that can be connected to buttons or switches free of potential and used for on / off commands, dimming, shutters or blinds / scenarios, sequences, step commands, etc. One of the 3 inputs can be configured as analogue for the connection of NTC temperature probes (see eelectron probes code TS00A01ACC / TS00B01ACC) with which to send the temperature measurement on the bus. 12 logic blocks are available to implement simple expressions with logical or threshold operator or complex expressions with algebraic and conditional operators.

The device also integrates the "Virtual Holder Logic"; the field of application is the hotel room: through a magnetic sensor installed on the door and connected to a digital input (also to the sensor itself), accurate presence information is managed. The presence detection solution can deduce the presence of people in the room using one or more dedicated sensors. It also detects an unexpected presence and is able to differentiate more behaviors.

The device manages the ambient lighting based on the measured illuminance; it is also possible to enable the logic called "Circadian Rhythm" with which brightness and color temperature are imposed on the basis of predefined curves or on the basis of the real position of the sun during the day with respect to a terrestrial coordinate.



Detection range

h	∅
5 m	6 m
12 m	14 m
16 m	19 m

## Technical Features

<b>Mechanical data</b>	<ul style="list-style-type: none"> <li>• Dimensions: ∅ × H 81 x 37 mm</li> </ul>
<b>Mounting</b>	<ul style="list-style-type: none"> <li>• Ceiling mounting, flush-mounted, surface installation</li> </ul>
<b>Supply</b>	<ul style="list-style-type: none"> <li>• Via bus EIB/KNX cable: 21 ÷ 32 Vdc</li> </ul>
<b>Input - digital mode</b>	<ul style="list-style-type: none"> <li>• For free potential contacts (dry contacts)</li> <li>• Max. length of Connecting Cables ≤ 30 m (twisted cable)</li> </ul>
<b>Input - analog mode for temperature probe</b>	For NTC temperature probe eelectron code: <ul style="list-style-type: none"> <li>• TS01A01ACC (range from -20°C to +100°C)</li> <li>• TS01B01ACC (range from -50°C to +60°C)</li> <li>• TS01D01ACC (range from -40°C to 125°C)</li> <li>• Max. length of Connecting Cable: ≤ 30 m (twisted cable)</li> </ul>

## Order Codes

### PD00E09KNX

KNX High bay presence detector with lighting control

### PD00E09KNX-3

KNX High bay presence detector with lighting control - Black

### PD00E00ACC

Surface mounting enclosure

### PD00E00ACC-3

Surface mounting enclosure - Black

### PD00E01ACC

Box mounting frame

### PD00E03ACC

Swiss box mounting frame - White

### PD00E03ACC-3

Swiss box mounting frame - Black

# KNX Multi.Sensor Presence Detector

WITH LIGHTING CONTROL, TEMPERATURE, HUMIDITY, SOUND SENSOR


The MULTI.SENSOR of Eelectron presence detectors range is suitable for ceiling mounting up to 4 m height. The device includes a brightness sensor for environmental lighting control, humidity and temperature sensors with the relative control algorithms and a sound sensor that can be used in rooms with parts not totally visible to the infrared sensor.

Presence detection, based on a passive infrared sensor, has 5 independently configurable channels with different functions that can be activated: presence with or without brightness control and with automatic or semi-automatic detection; constant brightness independent or presence dependent with automatic or semi-automatic activation.

The device has a rear connector with 3 digital inputs that can be connected to buttons or switches free of potential and used for on / off commands, dimming, shutters or blinds / scenarios, sequences, step commands, etc. One of the 3 inputs can be configured as analogue for the connection of NTC temperature probes (see eelectron probes code TS00A01ACC / TS00B01ACC) with which to send the temperature measurement on the bus or manage a complete thermostat module. The thermostat manages 2 stages with an integrated PI controller for controlling heating and cooling equipment, valves, 2 and 4-pipe fan coils, etc.

The humidity sensor manages the measurement of the ambient relative humidity and allows the control with thresholds and hysteresis of humidification and dehumidification equipments.

12 logic blocks are available to implement simple expressions with logical or threshold operator or complex expressions with algebraic and conditional operators. The device also integrates the "Virtual Holder Logic"; the field of application is the hotel room: through a magnetic sensor installed on the door and connected to a digital input (also to the sensor itself), accurate presence information is managed. The presence detection solution can deduce the presence of people in the room using one or more dedicated sensors. It also detects an unexpected presence and is able to differentiate more behaviors. The device manages the ambient lighting based on the measured illuminance; it is also possible to enable the logic called "Circadian Rhythm" with which brightness and color temperature are imposed on the basis of predefined curves or on the basis of the real position of the sun during the day with respect to a terrestrial coordinate.

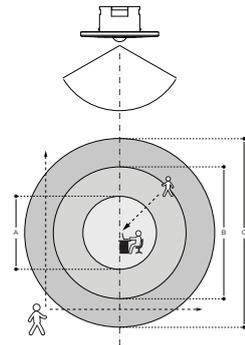

	BASIC	STANDARD	MULTI	SPACE
h	A	B	C	
2.5 m	3.8 m	7.0 m	10.0 m	
3.0 m	4.0 m	8.0 m	12.0 m	
3.5 m	5.0 m	9.0 m	13.0 m	
4.0 m	6.0 m	11.0 m	14.0 m	

- A | Person working at the desk
- B | Person moving towards the sensor
- C | Person moving sideways with respect to the sensor

Technical Features	
<b>Mechanical data</b>	<ul style="list-style-type: none"> <li>• Dimensions: Ø x H 81 x 37 mm</li> </ul>
<b>Mounting</b>	<ul style="list-style-type: none"> <li>• Ceiling mounting, flush-mounted, surface installation</li> </ul>
<b>Supply</b>	<ul style="list-style-type: none"> <li>• Via bus EIB/KNX cable: 21 ÷ 32 Vdc</li> </ul>
<b>Input - digital mode</b>	<ul style="list-style-type: none"> <li>• For free potential contacts (dry contacts)</li> <li>• Max. length of Connecting Cables ≤ 30 m (twisted cable)</li> </ul>
<b>Input - analog mode for temperature probe</b>	For NTC temperature probe eelectron code: <ul style="list-style-type: none"> <li>• TS01A01ACC (range from -20°C to +100°C)</li> <li>• TS01B01ACC (range from -50°C to +60°C)</li> <li>• TS01D01ACC (range from -40°C to 125°C)</li> <li>• Max. length of Connecting Cable: ≤ 30 m (twisted cable)</li> </ul>

## Order Codes


- PD00E02KNX**  
KNX Presence detector Multi.Sensor - lighting control, temperature, humidity, sound sensor
- PD00E02KNX-3**  
KNX Presence detector Multi.Sensor - lighting control, temperature, humidity, sound sensor - Black
- PD00E00ACC**  
Surface mounting enclosure
- PD00E00ACC-3**  
Surface mounting enclosure - Black
- PD00E01ACC**  
Box mounting frame
- SM03E01ACC**  
Slave sensor CO<sub>2</sub> + Temperature
- SM03E01ACC-3**  
Slave sensor CO<sub>2</sub> + Temperature - Black
- PD00E03ACC**  
Swiss box mounting frame - White
- PD00E03ACC-3**  
Swiss box mounting frame - Black

# KNX Space Presence Detector

WITH LIGHTING CONTROL, TEMPERATURE, HUMIDITY, SOUND SENSOR, UTILIZATION RANGE AND OCCUPANCY

The SPACE sensor of Eelectron presence detectors range is suitable for ceiling mounting up to 4 m height. The device includes a brightness sensor for environmental lighting control, humidity and temperature sensors with the relative control algorithms and a sound sensor that can be used in rooms with parts not totally visible to the infrared sensor. Presence detection, based on a passive infrared sensor, has 5 independently configurable channels with different functions that can be activated: presence with or without brightness control and with automatic or semi-automatic detection; constant brightness independent or presence dependent with automatic or semi-automatic activation. The device has a rear connector with 3 digital inputs that can be connected to buttons or switches free of potential and used for on / off commands, dimming, shutters or blinds / scenarios, sequences, step commands, etc. One of the 3 inputs can be configured as analogue for the connection of NTC temperature probes (see eelectron probes code TS00A01ACC / TS00B01ACC) with which to send the temperature measurement on the bus or manage a complete thermostat module. The thermostat manages 2 stages with an integrated PI controller for controlling heating and cooling equipment, valves, 2 and 4-pipe fan coils, etc. The humidity sensor manages the measurement of the ambient relative humidity and allows the control with thresholds and hysteresis of humidification and dehumidification equipments. 12 logic blocks are available to implement simple expressions with logical or threshold operator or complex expressions with algebraic and conditional operators. The device also integrates the "Virtual Holder Logic"; the field of application is the hotel room: through a magnetic sensor installed on the door and connected to a digital input (also to the sensor itself), accurate presence information is managed. The presence detection solution can deduce the presence of people in the room using one or more dedicated sensors. It also detects an unexpected presence and is able to differentiate more behaviors. The device manages the ambient lighting based on the measured illuminance; it is also possible to enable the logic called "Circadian Rhythm" with which brightness and color temperature are imposed on the basis of predefined curves or on the basis of the real position of the sun during the day with respect to a terrestrial coordinate.

To further integrate presence detection, the **Utilization function** can enable functionalities for mapping space status and related usage/availability i.e. space occupancy and % of utilization rates and can be used to create dashboards, analytics, etc. Moreover, the integrated **Occupancy function** detects useful data for the processing of information related to the intensity of the activity of occupants within the monitored areas allowing the generation of a "heat map" of the building areas.

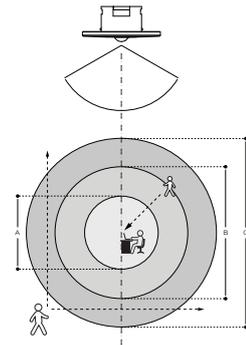

BASIC - STANDARD - MULTI - SPACE			
h	A	B	C
2.5 m	3.8 m	7.0 m	10.0 m
3.0 m	4.0 m	8.0 m	12.0 m
3.5 m	5.0 m	9.0 m	13.0 m
4.0 m	6.0 m	11.0 m	14.0 m

- A | Person working at the desk
- B | Person moving towards the sensor
- C | Person moving sideways with respect to the sensor

## Technical Features

<b>Mechanical data</b>	<ul style="list-style-type: none"> <li>• Dimensions: Ø x H 81 x 37 mm</li> </ul>
<b>Mounting</b>	<ul style="list-style-type: none"> <li>• Ceiling mounting, flush-mounted, surface installation</li> </ul>
<b>Supply</b>	<ul style="list-style-type: none"> <li>• Via bus EIB/KNX cable: 21 ÷ 32 Vdc</li> </ul>
<b>Input - digital mode</b>	<ul style="list-style-type: none"> <li>• For free potential contacts (dry contacts)</li> <li>• Max. length of Connecting Cables ≤ 30 m (twisted cable)</li> </ul>
<b>Input - analog mode for temperature probe</b>	For NTC temperature probe eelectron code: <ul style="list-style-type: none"> <li>• TS01A01ACC (range from -20°C to +100°C)</li> <li>• TS01B01ACC (range from -50°C to +60°C)</li> <li>• TS01D01ACC (range from -40°C to 125°C)</li> <li>• Max. length of Connecting Cable: ≤ 30 m (twisted cable)</li> </ul>

## Order Codes

### PD00E03KNX

KNX Presence detector Space - lighting control, temperature, humidity, sound sensor, utilization range and occupancy

### PD00E03KNX-3

KNX Presence detector Space - lighting control, temperature, humidity, sound sensor, utilization range and occupancy - Black

### PD00E00ACC

Surface mounting enclosure

### PD00E00ACC-3

Surface mounting enclosure - Black

### PD00E01ACC

Box mounting frame

### SM03E01ACC

Slave sensor CO<sub>2</sub> + Temperature

### SM03E01ACC-3

Slave sensor CO<sub>2</sub> + Temperature - Black

### PD00E03ACC

Swiss box mounting frame - White

### PD00E03ACC-3

Swiss box mounting frame - Black


# KNX Wide Range Presence Detector

WITH LIGHTING CONTROL

The device KNX Wide Range (PD00E20KNX) is an extended range presence and motion sensor suitable for use in indoor environments where a wide range coverage is required. It is equipped with a rear connector with 2 digital inputs that can be connected to potential-free buttons or switches and used for on / off, dimming, rolling shutters or blinds / scenarios, sequences, step-by-step commands, etc. The second input can be configured as analog for the connection of NTC temperature probes (see probes eelectron code TS00A01ACC / TS00B01ACC) to send the temperature measurement on the bus or manage a complete thermostat module. The thermostat manages 2 stages with integrated PI controller for driving heating and cooling equipment, valves, 2 and 4 pipe fan coils, etc.

Presence detection, based on a passive infrared sensor, has 5 independently configurable channels with different functions that can be activated: presence with or without brightness control and with automatic or semi-automatic detection; constant brightness independent or presence dependent with automatic or semi-automatic activation. The PD00E20KNX Wide Range sensor uses 3 distinct sensing elements; by means of the ETS parameterization it is possible to assign different behaviors to the different elements.

Moreover, 12 logic blocks are available to implement simple expressions with logical or threshold operator or complex expressions with algebraic and conditional operators; It's possible to use predefined algorithms as proportional controls of temperature and humidity or dew point calculation. The device also integrates the "Virtual Holder Logic" and it is also possible to enable the logic called "Circadian Rhythm".

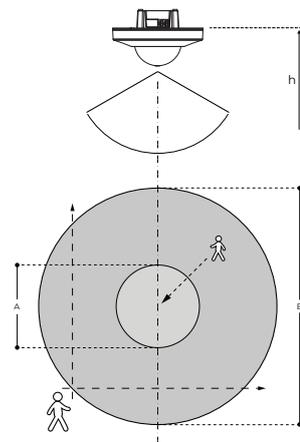

A	h = 2.5 m	B	h = 2.5 m
	ø = 7 m		ø = 24 m

A | Person working at the desk  
B | Person moving towards the sensor

## Technical Features

<b>Mechanical data</b>	<ul style="list-style-type: none"> <li>• Dimensions: Ø x H 105 x 66.5 mm</li> </ul>
<b>Mounting</b>	<ul style="list-style-type: none"> <li>• Ceiling mounting, flush-mounted, surface installation</li> </ul>
<b>Supply</b>	<ul style="list-style-type: none"> <li>• Via bus EIB/KNX cable: 21 ÷ 32 Vdc</li> </ul>
<b>Input - digital mode</b>	<ul style="list-style-type: none"> <li>• For free potential contacts (dry contacts)</li> <li>• Max. length of Connecting Cables ≤ 30 m (twisted cable)</li> </ul>
<b>Input - analog mode for temperature probe</b>	<p>For NTC temperature probe eelectron code:</p> <ul style="list-style-type: none"> <li>• TS01A01ACC (range from -20°C to +100°C)</li> <li>• TS01B01ACC (range from -50°C to +60°C)</li> <li>• TS01D01ACC (range from -40°C to 125°C)</li> <li>• Max. length of Connecting Cable: ≤ 30 m (twisted cable)</li> </ul>

## Order Codes

- PD00E20KNX**  
KNX Wide Range Presence detector - lighting control
- PD00E20KNX-3**  
KNX Wide Range Presence detector - lighting control - Black
- PD00E00ACC**  
Surface mounting enclosure
- PD00E00ACC-3**  
Surface mounting enclosure - Black
- PD00E01ACC**  
Box mounting frame
- SM03E01ACC**  
Slave sensor CO<sub>2</sub> + Temperature
- SM03E01ACC-3**  
Slave sensor CO<sub>2</sub> + Temperature - Black
- PD00E03ACC**  
Swiss box mounting frame - White
- PD00E03ACC-3**  
Swiss box mounting frame - Black


# KNX Corridor Presence Detector

WITH LIGHTING CONTROL

The device KNX Corridor (PD00E21KNX) is an extended range presence and motion sensor for corridors suitable for use in indoor environments where a wide range coverage is required. It is equipped with a rear connector with 2 digital inputs that can be connected to potential-free buttons or switches and used for on / off, dimming, rolling shutters or blinds/scenarios, sequences, step-by-step commands, etc. The second input can be configured as analog for the connection of NTC temperature probes (see probes eelectron code TS00A01ACC / TS00B01ACC) to send the temperature measurement on the bus or manage a complete thermostat module. The thermostat manages 2 stages with integrated PI controller for driving heating and cooling equipment, valves, 2 and 4 pipe fan coils, etc.

Presence detection, based on a passive infrared sensor, has 5 independently configurable channels with different functions that can be activated: presence with or without brightness control and with automatic or semi-automatic detection; constant brightness independent or presence dependent with automatic or semi-automatic activation. The PD00E21KNX Wide Range sensor uses 2 distinct sensing elements; by means of the ETS parameterization it is possible to assign different behaviors to the different elements.

Moreover, 12 logic blocks are available to implement simple expressions with logical or threshold operator or complex expressions with algebraic and conditional operators; It's possible to use predefined algorithms as proportional controls of temperature and humidity or dew point calculation. The device also integrates the "Virtual Holder Logic" and it is also possible to enable the logic called "Circadian Rhythm".

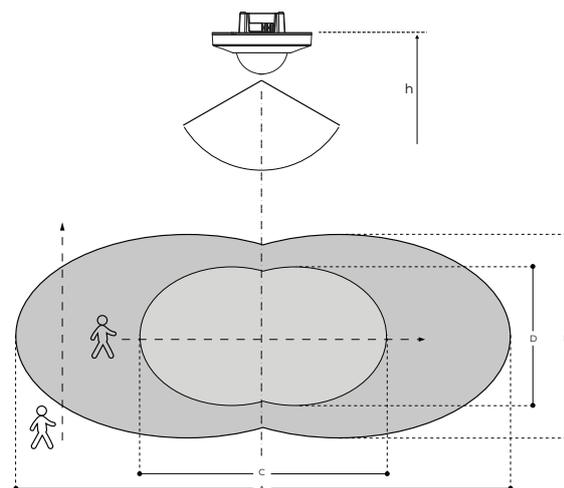

A	40 m	B	5 m
h	2.5 m	h	2.5 m
C	16 m	D	3 m
h	2.5 m	h	2.5 m

## Technical Features

<b>Mechanical data</b>	<ul style="list-style-type: none"> <li>Dimensions: Ø × H 105 x 66.5 mm</li> </ul>
<b>Mounting</b>	<ul style="list-style-type: none"> <li>Ceiling mounting, flush-mounted, surface installation</li> </ul>
<b>Supply</b>	<ul style="list-style-type: none"> <li>Via bus EIB/KNX cable: 21 ÷ 32 Vdc</li> </ul>
<b>Input - digital mode</b>	<ul style="list-style-type: none"> <li>For free potential contacts (dry contacts)</li> <li>Max. length of Connecting Cables ≤ 30 m (twisted cable)</li> </ul>
<b>Input - analog mode for temperature probe</b>	<p>For NTC temperature probe eelectron code:</p> <ul style="list-style-type: none"> <li>TS01A01ACC (range from -20°C to +100°C)</li> <li>TS01B01ACC (range from -50°C to +60°C)</li> <li>TS01D01ACC (range from -40°C to 125°C)</li> <li>Max. length of Connecting Cable: ≤ 30 m (twisted cable)</li> </ul>

## Order Codes

- PD00E21KNX**  
KNX Corridor Presence detector - lighting control
- PD00E21KNX-3**  
KNX Corridor Presence detector - lighting control - Black
- PD00E00ACC**  
Surface mounting enclosure
- PD00E00ACC-3**  
Surface mounting enclosure - Black
- PD00E01ACC**  
Box mounting frame
- SM03E01ACC**  
Slave sensor CO<sub>2</sub> + Temperature
- SM03E01ACC-3**  
Slave sensor CO<sub>2</sub> + Temperature - Black
- PD00E03ACC**  
Swiss box mounting frame - White
- PD00E03ACC-3**  
Swiss box mounting frame - Black

# Conventional Presence Detector

## 2 CH. CEILING MOUNTING PIR DETECTOR

The device is a ceiling flush mount PIR detector. The load will be switched on automatically when the movement is detected and the ambient light level is below the Lux setting value. Until there is no movement detected and the pre-set delay time has been expired, load will be switched off automatically. User can pre-set the desired Lux and Time values by VR or IR setting for automatic control lighting on / off with low initial cost and great energy saving potential. Can also be used in many different places for automation control. It can be widely used in home, office, conference room, classrooms, hotel, corridor, underground parking lots, etc.



### Technical Features

<b>Mechanical data</b>	<ul style="list-style-type: none"> <li>• Dimensions: (H x W x D): 64x80x80 mm</li> </ul>
<b>Mounting</b>	<ul style="list-style-type: none"> <li>• Ceiling mounting, surface installation</li> </ul>
<b>Range</b>	<ul style="list-style-type: none"> <li>• Up to Ø12 m at height of 2.5 m</li> <li>• Operating temperature: 20° C to +50° C</li> </ul>
<b>Output rate CH1 - for lighting</b>	<ul style="list-style-type: none"> <li>• Incandescent Lamp: Max. 2000 W</li> <li>• AC Halogen Lamp: Max. 1000 W</li> <li>• LV Halogen Lamp: Max. 1000 VA / 600 W (traditional Max. 1000VA / 900 W (electronics))</li> <li>• Fluorescent Lamp: <ul style="list-style-type: none"> <li>- Max. 1000 VA / 600 W (uncompensated)</li> <li>- Max. 900 VA / 100 µF</li> <li>- 25 x (1 x 18 W); 12 x (2 x 18 W);</li> <li>- 15 x (1 x 36 W); 7 x (2 x 36 W);</li> <li>- 10 x (1 x 58 W); 5 x (2 x 58 W)</li> </ul> </li> <li>• LED Lamp : Max. 400 W</li> <li>• Energy Saving Lamp: Max. 600 VA / 400 W (include CFL and PL lamp)</li> </ul>
<b>Output rate CH2 - for Automation Control</b>	<ul style="list-style-type: none"> <li>• (Lux is invalid): <ul style="list-style-type: none"> <li>- Max. 5 A (cos φ = 1) for 250 Vac</li> <li>- Max. 5 A for 30 Vdc</li> <li>- Max. 1 A (cos φ = 0.4) for 250 Vac</li> </ul> </li> </ul>

### Order Codes

#### PD02X01CON

2 Ch. ceiling mounting PIR detector  
230V AC – ø 12m

#### PD02X01ACC

Surface mounting enclosure

#### PD02X02CON

2 Ch. ceiling mounting PIR detector  
230V AC – ø 24 m

# Plug In Sensor CO<sub>2</sub> + Temperature

The code SM03E01ACC identifies the accessory of the devices code:  
 PD00E02KNX – KNX MULTI presence detector – lighting, temperature, humidity, sound. PD00E03KNX – KNX Space presence detector- lighting, temperature, humidity, sound , occupancy and utilization.  
 PD00E20KNX – wide range presence detector with lighting control.  
 PD00E21KNX – presence detector for corridor with lighting control.

This accessory includes a temperature probe (range from -5 ° C to +50 ° C) and a CO<sub>2</sub> sensor.



## Technical Features

<b>Mechanical data</b>	<ul style="list-style-type: none"> <li>• Dimensions: Ø × H 81 x 37 mm</li> </ul>
<b>Mounting</b>	<ul style="list-style-type: none"> <li>• Ceiling mounting, flush-mounted, surface installation</li> </ul>
<b>Supply</b>	<ul style="list-style-type: none"> <li>• Aux supply: 9 ÷ 32 Vdc 9 ÷ 24 Vac</li> </ul>
<b>Input - digital mode</b>	<ul style="list-style-type: none"> <li>• For free potential contacts (dry contacts)</li> <li>• Max. length of Connecting Cables ≤ 30 m (twisted cable)</li> </ul>
<b>Input - analog mode for temperature probe</b>	<p>For NTC temperature probe eelectron code:</p> <ul style="list-style-type: none"> <li>• TS01A01ACC (range from -20°C to +100°C)</li> <li>• TS01B01ACC (range from -50°C to +60°C)</li> <li>• TS01D01ACC (range from -40°C to 125°C)</li> <li>• Max. length of Connecting Cable: ≤ 30 m (twisted cable)</li> </ul>

## Order Codes

- SM03E01ACC**  
Slave sensor CO<sub>2</sub> + Temperature
- SM03E01ACC-3**  
Slave sensor CO<sub>2</sub> + Temperature - Black
- PD00E00ACC**  
Surface mounting enclosure
- PD00E00ACC-3**  
Surface mounting enclosure - Black
- PD00E01ACC**  
Box mounting frame
- PD00E03ACC**  
Swiss box mounting frame - White
- PD00E03ACC-3**  
Swiss box mounting frame - Black

# Plug In Sensor VOC + CO<sub>2</sub> + eCO<sub>2</sub> + Temperature

The code SM03E02ACC identifies the accessory of the devices code:  
 PD00E02KNX – KNX MULTI presence detector – lighting, temperature, humidity, sound. PD00E03KNX – KNX Space presence detector- lighting, temperature, humidity, sound , occupancy and utilization.  
 PD00E20KNX – wide range presence detector with lighting control.  
 PD00E21KNX – presence detector for corridor with lighting control.

This accessory includes a temperature probe (range from -5 ° C to + 50 ° C) and a CO<sub>2</sub> sensor.



## Technical Features

<b>Mechanical data</b>	<ul style="list-style-type: none"> <li>• Dimensions: Ø x H 81 x 37 mm</li> </ul>
<b>Mounting</b>	<ul style="list-style-type: none"> <li>• Ceiling mounting, flush-mounted, surface installation</li> </ul>
<b>Supply</b>	<ul style="list-style-type: none"> <li>• Aux supply: 9 ÷ 32 Vdc 9 ÷ 24 Vac</li> </ul>
<b>Input - digital mode</b>	<ul style="list-style-type: none"> <li>• For free potential contacts (dry contacts)</li> <li>• Max. length of Connecting Cables ≤ 30 m (twisted cable)</li> </ul>
<b>Input - analog mode for temperature probe</b>	<p>For NTC temperature probe eelectron code:</p> <ul style="list-style-type: none"> <li>• TS01A01ACC (range from -20°C to +100°C)</li> <li>• TS01B01ACC (range from -50°C to +60°C)</li> <li>• TS01D01ACC (range from -40°C to 125°C)</li> <li>• Max. length of Connecting Cable: ≤ 30 m (twisted cable)</li> </ul>

## Order Codes

- SM03E02ACC**  
Slave sensor CO<sub>2</sub> + Temperature
- SM03E02ACC-3**  
Slave sensor CO<sub>2</sub> + Temperature - Black
- PD00E00ACC**  
Surface mounting enclosure
- PD00E00ACC-3**  
Surface mounting enclosure - Black
- PD00E01ACC**  
Box mounting frame
- PD00E03ACC**  
Swiss box mounting frame - White
- PD00E03ACC-3**  
Swiss box mounting frame - Black

# Energy Meter

## SINGLE PHASE - MID

The device PM10E02IRE – Single-phase Digital Energy meter – Direct connection 80 A integrates all the measurement functions necessary to monitor a single-phase electrical installation:

- 0.25-5 (80) A, Class B, 230 VAC 50 Hz, -25 °C ÷ +55 °C, 4 Quadrants, 2 Tariffs
- Active Energy Class B (according to EN-50470) and Reactive Energy Class 2 (according to IEC 62053-23)
- Direct connected (up to 80 A)
- Backlighted LCD display and 3 push-button keys (to read Energies, V, I, PF, F, P, Q and to configure some parameters)
- Display with 8 digits.
- Self supplied (by the input voltage itself)
- DIN modules width (36 mm)
- 2 Tariffs controlled by a 230 VAC digital input
- 2 S0 standard low voltage pulse outputs MID certified



### Technical Features

<b>Mechanical data</b>	<ul style="list-style-type: none"> <li>• Dimensions: 2 DIN Modules (PM10E02IRE)</li> <li>• Dimensions: 1 DIN Module (PM00A00IRI)</li> </ul>
<b>Supply</b>	<ul style="list-style-type: none"> <li>• Via bus EIB/KNX cable: 21 ÷ 32 Vdc</li> <li>• Operating supply voltage range: 92 ÷ 276 Vac</li> <li>• Reference current 5 A / max current 63A / min. current 0.25 A / starting current 0.015 A</li> <li>• Nominal frequency 50 Hz / frequency range: 45 ÷ 65 Hz</li> <li>• Max Power consumption (voltage circuit) &lt; 2VA (1 W)</li> </ul>
<b>Functionality</b>	<ul style="list-style-type: none"> <li>• Connection to single-phase network (2-wires)</li> <li>• Tariff for active and reactive energy: n° 2 - T1 / T2</li> </ul>
<b>Overload capability</b>	<ul style="list-style-type: none"> <li>• Permanent voltage 276 Vac / temporary (1 s) 300 Vac</li> <li>• Permanent current 63 A / temporary (10 ms) 1890 A</li> </ul>
<b>Protective class</b>	Class II

### Order Codes

#### PM10E02IRE

Single-phase Digital Energy meter – Direct connection 80 A – MID

#### PM00A00IRI

EIB-KNX interface

# Energy Meter

ENERGY METER **THREE-PHASE ENERGY METER 80 A – MID**

ENERGY METER **THREE PHASE WITH EXTERNAL TA 1-5A – MID**

Devices provide all relevant measures for the evaluation of an electrical network: I, U, PF, F, THD%, Powers (displayed for each phase and 3 phase), and Imported/Exported Active/Reactive Energies.

- Direct connection (80 A)
- Current range 0.25-5(80) A
- 2 tariffs and with IR lateral communication available
- 2 S0 Pulse outputs MID certified

Devices are intended to be installed on DIN rail.



## Technical Features

<b>Mechanical data</b>	<ul style="list-style-type: none"> <li>• Dimensions: 4 DIN Modules</li> <li>• Dimensions: 1 DIN Module</li> </ul>
<b>Supply</b>	<ul style="list-style-type: none"> <li>• Via bus EIB/KNX cable: 21 ÷ 32 Vdc</li> <li>• Reference voltage Line to Neutral: 230 Vac</li> <li>• Reference voltage Line to Line: 400 Vac</li> <li>• Operating supply voltage range: 92 ÷ 276 / 160 ÷ 480 Vac</li> <li>• cod. <b>PM30E01IRE</b>: reference current 5 A / maximum current 63 A / minimum current 0.25 A / starting current 0.015 A</li> <li>• cod. <b>PM30E02IRE</b>: reference current 1 A / maximum current 6 A / minimum current 0.01 A / starting current 0.001 A</li> <li>• cod. <b>PM30E02IRE</b>: max CT ratio 10000/5 A or 2000/1 A; ratio adjusting step 5 or 1 A</li> <li>• Nominal frequency 50 A / frequency range: 45 ÷ 65 Hz</li> <li>• Max Power consumption (voltage circuit) ≤2 VA (0.6 W)</li> </ul>
<b>Functionality</b>	<ul style="list-style-type: none"> <li>• Connection to three-phase network (4-wires)</li> <li>• Tariff for active energy: n° 2 - T1 / T2</li> </ul>
<b>Overload capability</b>	<p><b>Voltage:</b></p> <ul style="list-style-type: none"> <li>• continuous phase-phase 480 Vac</li> <li>• 1 second phase-phase 800 Vac</li> <li>• cod. <b>PM30E01IRE</b>: continuous phase-N 276 Vac</li> <li>• cod. <b>PM30E02IRE</b>: continuous phase-N 800 Vac</li> <li>• 1 second phase-N 300 Vac</li> </ul> <p><b>Current:</b></p> <ul style="list-style-type: none"> <li>• cod. <b>PM30E01IRE</b>: <ul style="list-style-type: none"> <li>- continuous 80 A</li> <li>- 10ms 2400 A</li> </ul> </li> <li>• cod. <b>PM30E02IRE</b>: <ul style="list-style-type: none"> <li>- continuous 6 A</li> <li>- 0,5 ms 120 A</li> </ul> </li> </ul>

## Order Codes

### PM30E01IRE

Three-phase Digital Energy Meter Direct connection 80 A – MID

### PM30E02IRE

Three-phase Digital Energy Meter with external TA 1-5 A – MID

### PM00A00IRI

EIB-KNX interface

# KNX Time / Astronomical Master

ES01A00KNX is a digital electronic switch for time management of electrical utilities. It allows time programming (daily, weekly or yearly) or astronomical. ES01A00KNX can control 9 different channels on bus KNX. The programming of channel 1 is also replicated on the relay located on the device. Each channel can be associated with a different programming (time or astronomical). ES01A00KNX also offers the possibility of connecting via BUS a GPS module, ES01A00ACC (available as an accessory), which allows the acquisition of the time and the position through the satellite system, ensuring greater accuracy over time. The backup battery allows you to keep the settings even in case of blackout and can be replaced through the cover (sealable).



## Technical Features

<b>Mechanical data</b>	<ul style="list-style-type: none"> <li>• Dimensions: 3 DIN Modules</li> </ul>
<b>Supply</b>	<ul style="list-style-type: none"> <li>• Via bus EIB/KNX cable: 21 ÷ 32 Vdc</li> <li>• Auxiliary supply: 115 ÷ 230 Vac 50/60 Hz</li> </ul>
<b>Output rate</b>	<ul style="list-style-type: none"> <li>• Capacity at 250 Vac 16 A</li> <li>• Lamp loads</li> <li>• Incandescent lamps 2000 W</li> <li>• Fluorescent lamps (compensated) 250 VA</li> <li>• Low voltage halogen lamps 11000 VA</li> <li>• Halogen lamps at 240 V 2000 W</li> <li>• Low consumption lamps (CFL) 200 VA</li> <li>• Low consumption lamps (Downlights) 200 VA</li> <li>• LED 25 VA</li> </ul>

## Order Codes

**ES01A00KNX**  
KNX time/astronomical master

**ES01A00ACC**  
Additional GPS module

# Bridge

## KNX BRIDGE WITH IP INTERFACE AND POWER SUPPLY

The IPSBA01KNX device integrates a KNX power supply with auxiliary output with a total current of 640mA, and an IP interface, allowing KNX installations to be implemented quickly and efficiently. Device can be linked to a Cloud platform, through MQTT protocol, and share relevant data detected from connected KNX devices. The voltage of the bus output as well as that of the auxiliary output is 30V DC. The device is compact having a size of only 4 DIN modules. The KNX IP interface allows you to connect a KNX network to an IP backbone; the IP address can be obtained via DHCP server or manually configured via ETS®. The device works in accordance with the KNXnet / IP specifications; up to 5 different IP addresses can be assigned. The device is also a KNX bus node, with its own application program and can be configured with ETS® to communicate using KNX Data Secure protocol. Logic blocks are available to implement simple expressions with logical or threshold operator or complex expressions with algebraic and conditional operators; It's possible to use predefined algorithms as proportional controls of temperature and humidity or dew point calculation. The device also integrates the "Virtual Holder Logic"; the field of application is the hotel room: through a magnetic sensor installed on the door and connected to a digital input (also to the sensor itself), accurate presence information is managed. The presence detection solution can deduce the presence of people in the room using one or more dedicated sensors. It also detects an unexpected presence and is able to differentiate more behaviors. It is also implemented the control logic called "OnLine-OffLine" that checks all KNX TP devices of the subnet connected to the power supply are operating "On Line", alerting the backbone if one of them goes into "Off Line" status. On the device there are pushbuttons and signaling LEDs for bus reset operations as well as for Factory Reset or for displaying activity on the KNX bus and on the IP backbone. The device is intended for installation on DIN bar in LV distribution switchboards.



### Technical Features

<b>Mechanical data</b>	<ul style="list-style-type: none"> <li>• Dimensions: 4 DIN Modules</li> </ul>
<b>Supply</b>	<ul style="list-style-type: none"> <li>• Input voltage: 180 ..264 V AC, 50/60 Hz</li> <li>• Output voltage: DC 30 V (SELV)</li> <li>• Output current: 640 mA (KNX+AUX)</li> </ul>

### Order Codes

**IPSBA01KNX**  
KNX Bridge with IP interface and KNX-  
+AUX power supply 640mA

# Power Supply

640 mA

Power supply for generating bus voltage on a line with a maximum current of 640 mA. With integrated choke to decouple the power supply voltage from the bus. Connection with screw terminals.

Mounting on DIN rails EN 50022. Bus connection via bus terminal.



## Technical Features

<b>Mechanical data</b>	<ul style="list-style-type: none"> <li>• Dimensions: 3 DIN Modules</li> </ul>
<b>Supply</b>	<ul style="list-style-type: none"> <li>• Input voltage: 180 ÷ 264 Vac</li> <li>• Output voltage: Rated voltage 30 Vdc</li> <li>• Output current: Rated current 640 mA</li> </ul>

## Order Codes

**PS00D03KNX**  
640 mA Power Supply

# Power Supply

640 mA

The power supply unit PS00E03KNX provides the system power necessary for the KNX/EIB bus. The connection to the bus line is via the bus connection block located on the front side. The integrated choke prevents the data telegrams from short-circuiting on the bus line. When the built-in reset button is operated, the bus devices are returned to their initial state. For each bus line, at least one power supply unit PS00E03KNX is needed. Up to two power supply units may be attached to a single bus line. The distance between power supply unit PS00E03KNX and any of its bus devices must not exceed 350 m. The power supply unit PS00E03KNX has a voltage and current regulation and is therefore short-circuit proof. Short power failures can be bridged with a backup interval of approximately 200ms. The power supply unit PS00E03KNX can supply 30 Vdc power from an additional pair of terminals.



## Technical Features

<b>Mechanical data</b>	<ul style="list-style-type: none"> <li>• Dimensions: 5 DIN Modules</li> </ul>
<b>Supply</b>	<ul style="list-style-type: none"> <li>• Input voltage: 180 ÷ 264 Vac</li> <li>• Output voltage: Rated voltage 30 Vdc</li> <li>• Output current: Rated current 640 mA</li> </ul>

## Order Codes

**PS00E03KNX**  
640 mA Power Supply

# Power Supply

1280 mA

The power supply unit PS00D04KNX provides the system power necessary for the KNX/EIB bus. The connection to the bus line is via the bus connection block located on the front side. The integrated choke prevents the data telegrams from short-circuiting on the bus line. When the built-in reset button is operated (press the RESET button for at least 20 seconds to reset the KNX Bus), the bus devices are returned to their initial state. For each bus line, at least one power supply unit PS00D04KNX is needed. Up to two power supply units may be attached to a single bus line. The distance between power supply unit PS00D04KNX and any of its bus devices must not exceed 350 m. The power supply unit PS00D04KNX has a voltage and current regulation and is therefore short-circuit proof. Short power failures can be bridged with a backup interval of approximately 200 ms. The power supply unit PS00D04KNX can supply DC 30 V power from an additional pair of terminals.



## Technical Features

### Mechanical data

- Dimensions: 4 DIN Modules

### Supply

- Input voltage: AC 180 ÷ 264 V, 50 / 60 Hz
- Output voltage: DC 30 V (SELV)
- Output current: 1280 mA

## Order Codes

**PS00D04KNX**  
1280 mA Power Supply

# KNX IP Interface KNX Secure

## INTERFACE

The KNX IP Interface IN00S01IPI is a compact interface used to connect a PC to the KNX network. The connection is made through LAN (IP). Power is supplied via the KNX bus. The IP address can be obtained by a DHCP server or by manual configuration (ETS®) respectively. This device works according to the KNXnet/IP specification using the core, the device management and the tunneling part. The device supports KNX Security which can be enabled in ETS. With its interface functionality (tunneling) KNX security prevents from unauthorized access. The buttons are for diagnostic purposes. The LEDs indicate the operating status and communication errors on the bus.



### Technical Features

<b>Mechanical data</b>	<ul style="list-style-type: none"> <li>• Dimensions: 1 DIN Modules</li> </ul>
<b>Supply</b>	<ul style="list-style-type: none"> <li>• Via bus EIB/KNX cable: 21 ÷ 32 Vdc</li> </ul>
<b>Lan connection</b>	<ul style="list-style-type: none"> <li>• RJ-45 socket</li> <li>• Up to 8 simultaneous tunneling connection</li> </ul>

### Order Codes

**IN00S01IPI**  
IP-KNX Interface KNX Secure

# IP Router-KNX Secure

## INTERFACE

With the KNX / IP router, a bidirectional communication among more KNX bus lines is possible through LAN networks. If the device is connected to a PC with an appropriate software (for example, ETS), it can also be used like a programming interface for KNX bus system. The IP address can be dynamically assigned via a DHCP server, or manually configured using ETS parameters. Communications are made in accordance with KNXnet / IP specifications. During the data transfer, it is possible to configure a filter table and keep up to 150 messages in the “buffer” memory.



### Technical Features

<b>Mechanical data</b>	<ul style="list-style-type: none"> <li>• Dimensions: 1 DIN Modules</li> </ul>
<b>Supply</b>	<ul style="list-style-type: none"> <li>• Via bus EIB/KNX cable: 21 ÷ 32 Vdc</li> </ul>
<b>Lan connection</b>	<ul style="list-style-type: none"> <li>• RJ-45 socket</li> <li>• Up to 8 simultaneous tunneling connection</li> </ul>

### Order Codes

**IN00S01RIP**  
Router IP-KNX Interface KNX Secure

# Line Coupler

KNX

The LC00B01KNX KNX line coupler has been made in a compact design. It connects two KNX bus segments (for example, a KNX line with a KNX area). The device has a filter table (8k bytes) and ensures a galvanic isolation between the lines. The coupler supports KNX long frames and is compatible with the ETS® software (ETS 4.2 or higher).

The buttons on the front panel allow disabling the telegram filter for testing purposes. The LEDs indicate operating conditions as well as communication errors on the KNX bus.



## Technical Features

<b>Mechanical data</b>	<ul style="list-style-type: none"> <li>• Dimensions: 1 DIN Modules</li> </ul>
<b>Supply</b>	<ul style="list-style-type: none"> <li>• Via bus EIB/KNX cable: 21 ÷ 32 Vdc</li> </ul>

## Order Codes

**LC00B01KNX**  
Line Coupler KNX

# USB-KNX

INTERFACE

The device enables the KNX bus system to be interfaced to a PC equipped with a port for programming or managing through appropriate software.



## Technical Features

<b>Mechanical data</b>	<ul style="list-style-type: none"> <li>• Dimensions: 1 DIN Modules</li> </ul>
<b>Supply</b>	<ul style="list-style-type: none"> <li>• Via bus EIB/KNX cable: 21 ÷ 32 Vdc</li> <li>• USB consumption: &lt; 15 mA</li> </ul>
<b>USB Connection</b>	<ul style="list-style-type: none"> <li>• Connector type B</li> <li>• Max. cable length: 5 m</li> </ul>

## Order Codes

**IN00A03USB**  
USB-KNX Interface

# KNX

## BUS CABLE

It is used for installation in “smart” building applications. Guarantees perfect communication in accordance with specifications established by EIB / KNX, and is suitable for applications with fixed wiring inside channels and under plaster.



### Technical Features

<b>Inner Conductor</b>	<ul style="list-style-type: none"> <li>• Solid bare copper wire</li> </ul>
<b>Construction</b>	<ul style="list-style-type: none"> <li>• 1 x 2 x 0,8 or 2 x 2 x 0,8 mm</li> </ul>
<b>Dielectric</b>	<ul style="list-style-type: none"> <li>• Low smoke zero halogen fire retardant compound (LSZHFRNC)</li> </ul>
<b>Colours</b>	<ul style="list-style-type: none"> <li>• Red, black or red, black, yellow, white</li> </ul>
<b>Outer Jacket</b>	<ul style="list-style-type: none"> <li>• Low smoke zero halogen fire retardant compound (LSZHFRNC)</li> </ul>
<b>Classified</b>	<ul style="list-style-type: none"> <li>• CEI 20-11 M1</li> </ul>
<b>According to</b>	<ul style="list-style-type: none"> <li>• IEC 60332-1, IEC 61034-1= IEC 61034-2</li> </ul>
<b>Diameter</b>	<ul style="list-style-type: none"> <li>• 5,20 mm ± 0,20 colour</li> </ul>
<b>Colour</b>	<ul style="list-style-type: none"> <li>• Green (RAL 6018)</li> </ul>

### Order Codes

#### CV00A01KNX

Double-bus cable 2x2x0, 8 coils 100 m

#### CV05A02KNX

Single bus cable 1x2x0, 8 coils 500 m

## Miniature LED Lamps

3V BLUE OR WHITE

Packages of 20 or 60 pcs LED with Blue or White light 3 V wired red/black.



### Technical Features

<b>Dimension</b>	<ul style="list-style-type: none"> <li>• 3 mm x 4.3 mm (width and height) and 3.85 mm (radius)</li> <li>• Current: 20 mA</li> <li>• Reverse Voltage: 5 V</li> <li>• Luminous Intensity: 4000 Min - Max 9000 mcd</li> </ul>
------------------	--

### Order Codes

#### LD00A01ACC

Miniature LED Lamps Blue 3 V 20 pcs

#### LD00A11ACC

Miniature LED Lamps White 3 V 20 pcs

# KNX Connector

RED / BLACK

BUS Connector Red / Black for EIB / KNX, with direct plug connection. They can be connected up to 4 pairs of wires to a KNX device, it can also be used as a branch terminal.



## Technical Features

<b>Dimension</b>	<ul style="list-style-type: none"> <li>• (H. x W. x D.) 11.5 x 10 x 10 mm</li> </ul>
<b>Features</b>	<ul style="list-style-type: none"> <li>• Wire 22 to 18 AWG (0.6 - 1 mm)</li> <li>• EN detected voltage 100 V</li> <li>• Rated current 6 A</li> <li>• Stripping length from 5 to 6 mm</li> </ul>

## Order Codes

**WG00A01ACC**  
KNX Connector Red / Black Box 100 pcs

# Temperature Probe

INTERNAL/ EXTERNAL



## Order Codes

**TS01A04ACC**  
Temperature probe  
4 pcs

**TS01B04ACC**  
External temperature probe  
4 pcs



Eelectron spa  
Via Monteverdi 6 | 20025 Legnano (MI) - Italia  
Tel: +39 0331 500802  
Email: [info@eelectron.com](mailto:info@eelectron.com)  
Web: [www.eelectron.com](http://www.eelectron.com)

