



PRODUCTS CATALOGUE 2024



Eelectron designs and manufactures electronic devices in Italy and Germany with applications based on KNX®, Bluetooth®, DALI-2® and MQTT® standards and software solutions for the end user.

Eelectron's philosophy is aimed at combining aspects of design and functional and performance research through highly innovative devices, interoperable on international standards, secure and connected to the cloud.

The constantly evolving product portfolio is outlined around the building modernization process, focusing on connected room/ zone secure automation, Building Evolution, hotel automation and smart homes.


A key focus since design phase is dedicated to the reliability of products and to today's emerging applications, for the benefit of occupants and managers.

In fact, Eelectron's experience is dedicated to the well-being of people in buildings and is aimed at those who design, install or manage them in the most sustainable, energy efficient, comfortable, healthy ways and secure when connected.

Pre and post-sales assistance and regular training activities are the foundation of a philosophy that places customers and the markets at the centre.

Compliance with the strictest international quality standards completes Eelectron's vision, which leads the market following its roots and mission: to technologically innovate products, applications and services.

The catalog is constantly updated, we invite you to subscribe to the eelectron newsletter, by visiting the website www.eelectron. com, and follow our social networks.

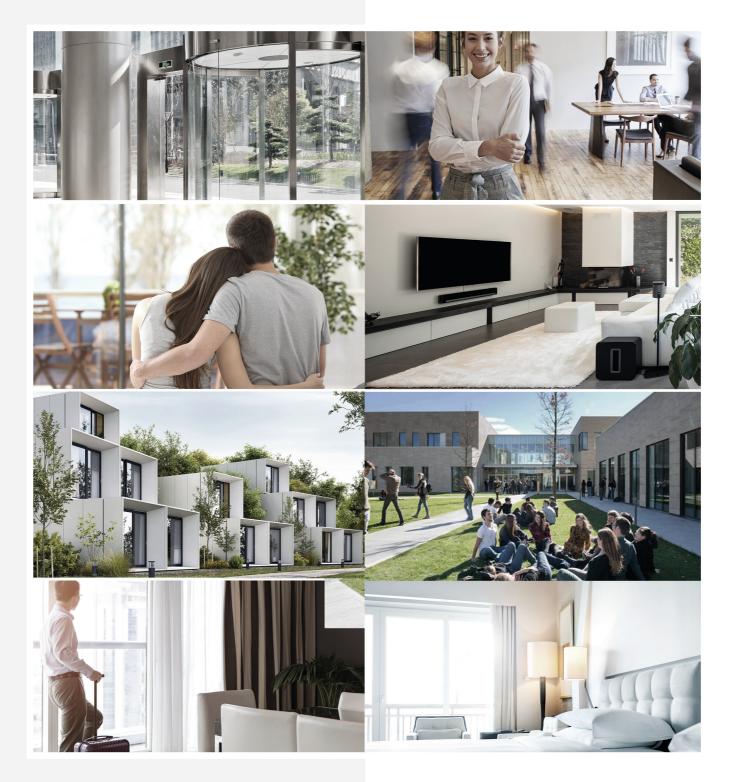

IOT.

Indeed, mentioned MQTT secure connectivity for further digital oriented easy to link IoT applications as well BACNET IP connectivity is expanding the capability to share data within an evolving building applications demands, Satisfy Customers and Markets trends today for tomorrow, our Eelectron vision as Builindg & Home evolution.

Eelectron SpA is a Training Center certificated by KNX Association: basic, advanced and HVAC courses.







Since its founding in 1994, Eelectron has invested to offer the best technology in building applications: A shareholder of KNX Association (www.knx.org) since 2005.

EIB/KNX is the interoperable global standard, connected and secure in the management sector for intelligent, sustainable and healthy buildings, the expression of 500 leading constructors in the sector and with more than 12 million nodes installed worldwide in renovation, extension and new construction projects.

KNX promotes long-term investment protection by combining comfort, energy saving, facilitating planning and maintenance with constantly evolving technology: since 2018 it includes the "Secure" standard for security in "building automation" and for the

Eelectron, as an official KNX Training Center, has always disseminated the implementation of good programming guidelines and recommendations for "Secure" aspects.

Furthermore, the portfolio is oriented to "vertical markets": tertiary, hospitality, residential, healthcare proposing specific applications and integrating standard, reliable and safe technologies.

Eelectron products use and interact with Bluetooth technology (www.bluetooth.org), both for wired/wireless configurations and connected applications such as mobile App and cloud.

The interoperability of KNX promoted by eelectron is aimed at proposing integrated solutions with other standards, such as recently updated produc line DALI-2 for modern lighting control (www.dali-alliance.org), or other protocols to meet needs oriented to different market sectors. Eelectron is a member and active in the aforementioned associations.







Index

The ranges for User Experience

SWITCHES & FRAMES, THERMOSTATS

| - OL-U | 6 |
|-----------------------------|-----|
| - 9025 | 67 |
| - MINIPAD | 114 |
| - 3025 | 106 |
| TOUCH PANELS | 108 |
| WEB SERVERS AND MOBILE APPS | 116 |

Produtes for Building Automation & Smart Home

ACTUATORS AND CONTROLLERS

| ACTUATORS AND CONTROLLERS | |
|---|-------------------|
| INPUTS: - DIN MODULE - INWALL | 124 |
| INPUTS/OUTPUTS: - LIGHTING - SHUTTERS - CLIMATE | 128 |
| OUTPUTS: - LIGHTING - DIMMERS - GATEWAY - SHUTTERS - CLIMATE | 133 |
| PRESENCE AND MULTI-SENSORS | |
| - CONVENTIONAL - KNX - DALI | 164 168 176 |
| - WEATHER STATION | 195 |
| MEASUREMENT AND SYSTEM COMPONENTS | |
| - ENERGY METERS - BRIDGE | 182 186 |
| Solutions for Smart Buildings HOSPITALITY DEVOTION | |
| - ACCESS CONTROL 9025 - SYNCRONICITY ACCESS CONTROL - GRMS ESUITE | 86 100 102 |
| OTHER - CABLES AND CONNECTORS - PROBES AND ACCESSORIES | 196 197 |

Design Controls

Research, development, design, production. Made in Italy



55x55, 4 Controls, different Materials. Integrated thermostat detecting and regulating a desired temperature. Materials, functionalities, finishing are essential values for your environment project.



A product range dedicated to democratic, smart and creative design.

To the interaction between users and lighting control, energy saving, temperature control, entertainment.








OL-U - REGULAR VERSION

The KNX plastic switch OL-U in the Regular Version includes button and frames finished in painted plastic. The switch SO08A01KNX of the OL-U® KNX® series for wall installation is equipped with up to 8 mechanical buttons (16 channels) for managing on/off commands, dimmers, rolling shutters and venetian blinds, or other programmable command and control functions. The device can be configured via the ETS® application program and can communicate with the KNX Data Secure protocol. The device integrates one 2-stage thermostats for the control of two distinct areas, both with integrated PI controller for piloting heating, cooling, valves, 6-way valves, fan coils 2 and 4 pipes. On the front side there is a capacitive bar with swipe function for the implementation of programmable KNX functions. A freely configurable RGB Led bar is also available for displaying states or other quantities available on the KNX bus. Moreover, 32 logic blocks are available to implement simple expressions with logical or threshold operator or complex expressions with algebraic and conditional operators; It is possible to use predefined algorithms as proportional controls of temperature and humidity or dew point calculation. The device also integrates the "Virtual Holder Logic"; the field of application is the hotel room: through a magnetic sensor installed on the door and connected to a digital input, accurate presence information is managed. The presence detection solution can deduce the presence of people in the room using one or more dedicated sensors. It also detects an unexpected presence and is able to differentiate more behaviors. The OL-U® KNX® series is available in various colors and can be installed on a 2 or 3 module box and is compatible with the main standards (Italian, German, British, Swiss).

| Technical Features | | |
|--------------------|---|--|
| Mechanical data | Device dimensions (without frame): 71x71x25 mm Frame dimensions 2 Modules: 92x92x11 mm | |
| Mounting | Flush mounted wall box | |
| Supply | Via ElB/KNX bus 21 ÷ 32V DC Max 30 mA | |
| Terms of use | Operating temperature: -5 °C +45 °C Storage temperature: -20 °C +55 °C Relative humidity (not condensing): max. 90% | |

How to order





PO71A01PL-x

BK42PLL-x Hardware + Metal frame included BK24PLL-x BK08PLL-x

BK04PLL-x

BK08PLR





Order Codes

KNX Switch REGULAR Version SO08A01KNX Hardware + Metal Frame


Kit 4 Buttons BK04PLL-1 Painted plastic - White BK04PLL-3 Painted plastic - Black

Kit 4 left + 2 right Buttons BK42PLL-1 Painted plastic - White BK42PLL-3 Painted plastic - Black

Kit 2 left + 4 right Buttons BK24PLL-1 Painted plastic - White BK24PLL-3 Painted plastic - Black

Kit 8 Buttons BK08PLL-1 Painted plastic - White BK08PLL-3 Painted plastic - Black BK08PLR - Raw plastic

Frame 71mm - 2 Modules PO71A01PL-1 Painted plastic - White PO71A01PL-3 Painted plastic - Black

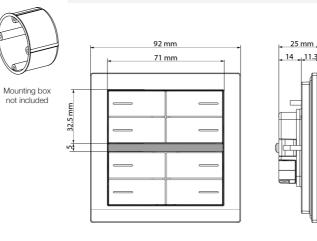


2 Modules Version

KIX SECURE



2 Modules Version



SO08A01KNX HARDWARE

Metal frame included





BK04PLL-1 Painted plastic - White

BK04PLL-3 Painted plastic - Black





BK42PLL-1 Painted plastic - White

BK42PLL-3 Painted plastic - Black





BK24PLL-1 Painted plastic - White

BK24PLL-3 Painted plastic - Black

| - | |
|---|--|
| | |
| | |
| | |
| | |
| | |



BK08PLL-1 Painted plastic - White

BK08PLL-3 Painted plastic - Black



Kit 4 Buttons - Square



Kit 4 left + 2 right Buttons



Kit 2 left + 4 right Buttons





OL-U - REGULAR VERSION


The Regular Version includes finishes for the buttons and frames in painted plastic. The switch SO08A01KNX of the OL-U® KNX® series for wall installation is equipped with up to 8 mechanical buttons (16 channels) for managing on/off commands, dimmers, rolling shutters and venetian blinds, or other programmable command and control functions. The device can be configured via the ETS® application program and can communicate with the KNX Data Secure protocol. The device integrates one 2-stage thermostats for the control of two distinct areas, both with integrated PI controller for piloting heating, cooling, valves, 6-way valves, fan coils 2 and 4 pipes. On the front side there is a capacitive bar with swipe function for the implementation of programmable KNX functions. A freely configurable RGB Led bar is also available for displaying states or other quantities available on the KNX bus. Moreover, 32 logic blocks are available to implement simple expressions with logical or threshold operator or complex expressions with algebraic and conditional operators; It is possible to use predefined algorithms as proportional controls of temperature and humidity or dew point calculation. The device also integrates the "Virtual Holder Logic"; the field of application is the hotel room: through a magnetic sensor installed on the door and connected to a digital input, accurate presence information is managed. The presence detection solution can deduce the presence of people in the room using one or more dedicated sensors.

It also detects an unexpected presence and is able to differentiate more behaviors. The OL-U® KNX® series is available in various colors and can be installed on a 2 or 3 module box and is compatible with the main standards (Italian, German, British, Swiss).

| Technical Features | | |
|--------------------|---|--|
| Mechanical data | Device dimensions (without frame): 71x71x25 mm Frame dimensions 3 Modules: 130x92x11 mm | |
| Mounting | Flush mounted wall box | |
| Supply | Via EIB/KNX bus 21 ÷ 32V DC Max 30 mA | |
| Terms of use | Operating temperature: -5 °C +45 °C Storage temperature: -20 °C +55 °C Belative humidity (not condensing): max. 90% | |

elative humidity (not condensing): max. 90%


How to order



BK04PLL-x

BK42PLL-x

BK24PLL-x BK08PLL-x BK08PLR



PO71A03PL-x

SO08A01KNX-3M Hardware + Metal frame included

3 Modules Version



Order Codes

KNX Switch **REGULAR Version** SO08A01KNX-3M Hardware + Metal Frame

Kit 4 Buttons BK04PLL-1 Painted plastic - White BK04PLL-3 Painted plastic - Black

Kit 4 left + 2 right Buttons BK42PLL-1 Painted plastic - White BK42PLL-3 Painted plastic - Black


Kit 2 left + 4 right Buttons BK24PLL-1 Painted plastic - White BK24PLL-3 Painted plastic - Black

Kit 8 Buttons BK08PLL-1 Painted plastic - White BK08PLL-3 Painted plastic - Black BK08PLR Raw plastic

Frame 71mm - 3 Modules PO71A03PL-1 Painted plastic - White


PO71A03PL-3 Painted plastic - Black

Mounting box not included




3 Modules Version





SO08A01KNX-3M HARDWARF







BK04PLL-1 Painted plastic - White

BK04PLL-3 Painted plastic - Black





BK42PLL-1 Painted plastic - White



BK42PLL-3 Painted plastic - Black





BK24PLL-1 Painted plastic - White

BK24PLL-3 Painted plastic - Black



BK08PLL-1

Painted plastic - White



BK08PLL-3 Painted plastic - Black



Kit 4 Buttons - Square



Kit 4 left + 2 right Buttons



Kit 2 left + 4 right Buttons






OL-U - FENIX EDITION

The KNX Fenix switch OL-U in the Fenix version includes button and frames finished in Fenix. The switch SO08A01KNX of the OL-U® KNX® series for wall installation is equipped with up to 8 mechanical buttons (16 channels) for managing on/off commands, dimmers, rolling shutters and venetian blinds, or other programmable command and control functions. The device can be configured via the ETS® application program and can communicate with the KNX Data Secure protocol. The device integrates one 2-stage thermostats for the control of two distinct areas, both with integrated PI controller for piloting heating, cooling, valves, 6-way valves, fan coils 2 and 4 pipes. On the front side there is a capacitive bar with swipe function for the implementation of programmable KNX functions. A freely configurable RGB Led bar is also available for displaying states or other quantities available on the KNX bus. Moreover, 32 logic blocks are available to implement simple expressions with logical or threshold operator or complex expressions with algebraic and conditional operators; It is possible to use predefined algorithms as proportional controls of temperature and humidity or dew point calculation. The device also integrates the "Virtual Holder Logic"; the field of application is the hotel room: through a magnetic sensor installed on the door and connected to a digital input, accurate presence information is managed. The presence detection solution can deduce the presence of people in the room using one or more dedicated sensors. It also detects an unexpected presence and is able to differentiate more behaviors. The OL-U® KNX® series is available in various colors and can be installed on a 2 or 3 module box and is compatible with the main standards (Italian, German, British, Swiss).

| Technical Features | | | |
|--------------------|---|--|--|
| Mechanical data | Device dimensions (without frame): 71x71x25 mm Frame dimensions 2 Modules: 92x92x11 mm | | |
| Mounting | Flush mounted wall box | | |
| Supply | Via EIB/KNX bus 21 ÷ 32V DC Max 30 mA | | |
| Terms of use | Operating temperature: -5 °C +45 °C Storage temperature: -20 °C +55 °C Relative humidity (not condensing): max. 90% | | |

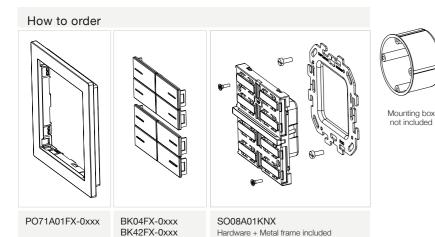

BK24FX-0xxx BK08FX-0xxx BK08PLR

2 Modules Version



Order Codes

KNX Switch **FENIX Edition**

SO08A01KNX Hardware + Metal Frame

Kit 4 Buttons

BK04FX-0032 - FENIX White Kos 0032 BK04FX-0030 - FENIX White Alaska 0030 BK04FX-0720 - FENIX Black Ingo 0720 BK04FX-0724 - FENIX Grey Bromo 0724 BK04FX-0748 - FENIX Beige Arizona 0748 BK04FX-0754 - FENIX Blue Fes 0754

Kit 4 left + 2 right Buttons

BK42FX-0032 - FENIX White Kos 0032 BK42FX-0030 - FENIX White Alaska 0030 BK42FX-0720 - FENIX Black Ingo 0720 BK42FX-0724 - FENIX Grey Bromo 0724 BK42FX-0748 - FENIX Beige Arizona 0748 BK42FX-0754 - FENIX Blue Fes 0754

Kit 2 left + 4 right Buttons

BK24FX-0032 - FENIX White Kos 0032 BK24FX-0030 - FENIX White Alaska 0030 BK24FX-0720 - FENIX Black Ingo 0720 BK24FX-0724 - FENIX Grey Bromo 0724 BK24FX-0748 - FENIX Beige Arizona 0748 BK24FX-0754 - FENIX Blue Fes 0754

Kit 8 Buttons

BK08FX-0032 - FENIX White Kos 0032 BK08FX-0030 - FENIX White Alaska 0030 BK08FX-0720 - FENIX Black Ingo 0720 BK08FX-0724 - FENIX Grey Bromo 0724 BK08FX-0748 - FENIX Beige Arizona 0748 BK08FX-0754 - FENIX Blue Fes 0754 **BK08PLR** - Raw plastic


Frame 71mm - 2 Modules PO71A01FX-0XXX

FENIX - White Kos 0032, White Alaska 0030, Black Ingo 0720, Grey Bromo 0724, Beige Arizona 0748, Blue Fes 0754

2 Modules Version



HARDWARF



SO08A01KNX

Metal frame included

BK04FX-0720

FENIX Black Ingo 0720

BK42FX-0720

FENIX Black Ingo 0720





BK04FX-0030 FENIX White Alaska 0030

BK04FX-0724 FENIX Grev Bromo 0724





BK42FX-0030 FENIX White Alaska 0030

BK42FX-0724 FENIX Grey Bromo 0724







BK24FX-0030 FENIX White Alaska 0030 BK24FX-0720 FENIX Black Indo 0720

BK24FX-0724 FENIX Grev Bromo 0724





BK08FX-0030 FENIX White Alaska 0030 BK08FX-0720 FENIX Black Ingo 0720 BK08FX-0724 FENIX Grev Bromo 0724





Kit 4 Buttons - Square



BK04FX-0032 FENIX White Kos 0032



BK04FX-0748 FENIX Beige Arizona 0748



BK04FX-0754 FENIX Blue Fes 0754





BK42FX-0748 FENIX Beige Arizona 0748



BK42FX-0754 FENIX Blue Fes 0754

| |
|------|
| |
| |
| |

BK42FX-0032 FENIX White Kos 0032



Kit 2 left + 4 right Buttons



BK24FX-0754 FENIX Blue Fes 0754



BK24FX-0032 FENIX White Kos 0032



BK24FX-0748

FENIX Beige Arizona 0748

BK08FX-0748 FENIX Beige Arizona 0748



BK08FX-0754 FENIX Blue Fes 0754

Kit 8 Buttons



BK08FX-0032 FENIX White Kos 0032


Kit 4 left + 2 right Buttons


OL-U - FENIX EDITION

The Fenix Edition includes finishes for the buttons and frames in Fenix. The switch SO08A01KNX of the OL-U® KNX® series for wall installation is equipped with up to 8 mechanical buttons (16 channels) for managing on/off commands, dimmers, rolling shutters and venetian blinds, or other programmable command and control functions. The device can be configured via the ETS® application program and can communicate with the KNX Data Secure protocol. The device integrates one 2-stage thermostats for the control of two distinct areas, both with integrated PI controller for piloting heating, cooling, valves, 6-way valves, fan coils 2 and 4 pipes. On the front side there is a capacitive bar with swipe function for the implementation of programmable KNX functions. A freely configurable RGB Led bar is also available for displaying states or other quantities available on the KNX bus. Moreover, 32 logic blocks are available to implement simple expressions with logical or threshold operator or complex expressions with algebraic and conditional operators; It is possible to use predefined algorithms as proportional controls of temperature and humidity or dew point calculation. The device also integrates the "Virtual Holder Logic"; the field of application is the hotel room: through a magnetic sensor installed on the door and connected to a digital input, accurate presence information is managed. The presence detection solution can deduce the presence of people in the room using one or more dedicated sensors.

It also detects an unexpected presence and is able to differentiate more behaviors. The OL-U® KNX® series is available in various colors and can be installed on a 2 or 3 module box and is compatible with the main standards (Italian, German, British, Swiss).

| Technical Features | | |
|--------------------|---|--|
| Mechanical data | Device dimensions (without frame): 71x71x25 mm Frame dimensions 3 Modules: 130x92x11 mm | |
| Mounting | Flush mounted wall box | |
| Supply | Via ElB/KNX bus 21 ÷ 32V DC Max 30 mA | |
| Terms of use | Operating temperature: -5 °C +45 °C Storage temperature: -20 °C +55 °C Relative humidity (not condensing); max, 90% | |

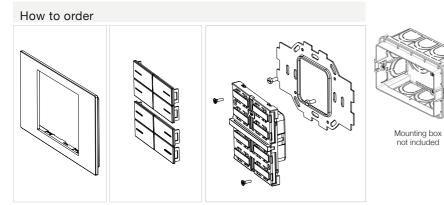





Order Codes

KNX Switch **FENIX Edition**

SO08A01KNX-3M Hardware + Metal Frame

Kit 4 Buttons

BK04FX-0032 - FENIX White Kos 0032 BK04FX-0030 - FENIX White Alaska 0030 BK04FX-0720 - FENIX Black Ingo 0720 BK04FX-0724 - FENIX Grey Bromo 0724 BK04FX-0748 - FENIX Beige Arizona 0748 BK04FX-0754 - FENIX Blue Fes 0754

Kit 4 left + 2 right Buttons

BK42FX-0032 - FENIX White Kos 0032 BK42FX-0030 - FENIX White Alaska 0030 BK42FX-0720 - FENIX Black Ingo 0720 BK42FX-0724 - FENIX Grey Bromo 0724 BK42FX-0748 - FENIX Beige Arizona 0748 BK42FX-0754 - FENIX Blue Fes 0754

Kit 2 left + 4 right Buttons

BK24FX-0032 - FENIX White Kos 0032 BK24FX-0030 - FENIX White Alaska 0030 BK24FX-0720 - FENIX Black Ingo 0720 BK24FX-0724 - FENIX Grey Bromo 0724 BK24FX-0748 - FENIX Beige Arizona 0748 BK24FX-0754 - FENIX Blue Fes 0754

Kit 8 Buttons


BK08FX-0032 - FENIX White Kos 0032 BK08FX-0030 - FENIX White Alaska 0030 BK08FX-0720 - FENIX Black Ingo 0720 BK08FX-0724 - FENIX Grey Bromo 0724 BK08FX-0748 - FENIX Beige Arizona 0748 BK08FX-0754 - FENIX Blue Fes 0754 **BK08PLR** - Raw plastic

Frame 71mm - 3 Modules PO71A03FX-0XXX

FENIX - White Kos 0032, White Alaska 0030, Black Ingo 0720, Grey Bromo 0724, Beige Arizona 0748, Blue Fes 0754

3 Modules Version





SO08A01KNX-3M HARDWARF

FENIX White Alaska 0030

Metal frame included



BK04FX-0720 FENIX Black Ingo 0720

BK04FX-0724 FENIX Grev Bromo 0724



BK42FX-0720

FENIX Black Ingo 0720

BK42FX-0030 FENIX White Alaska 0030

BK42FX-0724 FENIX Grey Bromo 0724





BK24FX-0030 FENIX White Alaska 0030 FENIX Black Ingo 0720

BK24FX-0720 BK24FX-0724 FENIX Grev Bromo 0724



BK08FX-0030 FENIX White Alaska 0030

BK08FX-0720 FENIX Black Ingo 0720

BK08FX-0724 FENIX Grev Bromo 0724

PO71A03FX-0xxx BK04FX-0xxx BK42FX-0xxx BK24FX-0xxx BK08FX-0xxx BK08PLR

SO08A01KNX-3M Hardware + Metal frame included



Kit 4 Buttons - Square



BK04FX-0748 FENIX Beige Arizona 0748




BK04FX-0754 FENIX Blue Fes 0754



BK04FX-0032 FENIX White Kos 0032

Kit 4 left + 2 right Buttons



BK42FX-0748 FENIX Beige Arizona 0748



BK42FX-0754 FENIX Blue Fes 0754



BK42FX-0032 FENIX White Kos 0032

Kit 2 left + 4 right Buttons




BK24FX-0748 FENIX Beige Arizona 0748



BK24FX-0754 FENIX Blue Fes 0754



BK24FX-0032 FENIX White Kos 0032



BK08FX-0748 FENIX Beige Arizona 0748



BK08FX-0754 FENIX Blue Fes 0754




BK08FX-0032 FENIX White Kos 0032


OL-U - METAL EDITION

The KNX metal switch OL-U in the Metal Version includes button and frames finished in metal. The switch SO08A01KNX of the OL-U® KNX® series for wall installation is equipped with up to 8 mechanical buttons (16 channels) for managing on/off commands, dimmers, rolling shutters and venetian blinds, or other programmable command and control functions. The device can be configured via the ETS® application program and can communicate with the KNX Data Secure protocol. The device integrates one 2-stage thermostats for the control of two distinct areas, both with integrated PI controller for piloting heating, cooling, valves, 6-way valves, fan coils 2 and 4 pipes. On the front side there is a capacitive bar with swipe function for the implementation of programmable KNX functions. A freely configurable RGB Led bar is also available for displaying states or other quantities available on the KNX bus. Moreover, 32 logic blocks are available to implement simple expressions with logical or threshold operator or complex expressions with algebraic and conditional operators; It is possible to use predefined algorithms as proportional controls of temperature and humidity or dew point calculation. The device also integrates the "Virtual Holder Logic"; the field of application is the hotel room: through a magnetic sensor installed on the door and connected to a digital input, accurate presence information is managed. The presence detection solution can deduce the presence of people in the room using one or more dedicated sensors. It also detects an unexpected presence and is able to differentiate more behaviors. The OL-U® KNX® series is available in various colors and can be installed on a 2 or 3 module box and is compatible with the main standards (Italian, German, British, Swiss).

| Technical Features | | |
|--------------------|---|--|
| Mechanical data | Device dimensions (without frame): 71x71x25 mm Frame dimensions 2 Modules: 92x92x11 mm | |
| Mounting | Flush mounted wall box | |
| Supply | Via ElB/KNX bus 21 ÷ 32V DC Max 30 mA | |
| Terms of use | Operating temperature: -5 °C +45 °C Storage temperature: -20 °C +55 °C Relative humidity (not condensing): max. 90% | |

How to order





PO71A01MT-xx

BK42MT-xx Hard BK24MT-xx BK08MT-xx

BK08PLR

Hardware + Metal frame included

2 Modules Version



Order Codes

KNX Switch METAL Edition

SO08A01KNX Hardware + Metal Frame

Kit 4 Buttons BK04MT-SH - Silver BK04MT-CH - Champagne BK04MT-GO - Gold BK04MT-BR - Bronze


Kit 4 left + 2 right Buttons BK42MT-SH - Silver BK42MT-CH - Champagne BK42MT-GO - Gold BK42MT-BR - Bronze

Kit 2 left + 4 right Buttons BK24MT-SH - Silver BK24MT-CH - Champagne BK24MT-GO - Gold BK24MT-BR - Bronze

Kit 8 Buttons


BK08MT-SH - Silver BK08MT-CH - Champagne BK08MT-GO - Gold BK08MT-BR - Bronze BK08PLR - Raw plastic

Frame 71mm - 2 Modules PO71A01MT-XX Metal - Silver SH, Champagne CH, Gold BR, Bronze BR

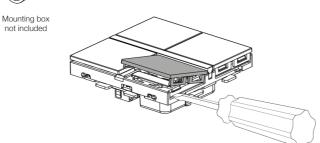

2 Modules Version





SO08A01KNX HARDWARE

Metal frame included







BK04MT-SH Silver

BK04MT-CH Champagne

BK04MT-GO Gold







BK42MT-SH Silver BK42MT-CH Champagne BK42MT-GO







BK24MT-SH Silver

BK24MT-CH Champagne BK24MT-GO



| - | - |
|---|---|
| - | - |
| | |
| - | _ |
| | |

BK08MT-SH Silver BK08MT-CH Champagne BK08MT-GO




Kit 4 Buttons - Square





BK04MT-BR Bronze







BK42MT-BR Bronze



BK24MT-BR Bronze



BK08MT-BR Bronze

Kit 2 left + 4 right Buttons





OL-U - METAL EDITION


The Metal Edition includes finishes for the buttons and frames in metal. The switch SO08A01KNX of the OL-U® KNX® series for wall installation is equipped with up to 8 mechanical buttons (16 channels) for managing on/off commands, dimmers, rolling shutters and venetian blinds, or other programmable command and control functions. The device can be configured via the ETS® application program and can communicate with the KNX Data Secure protocol. The device integrates one 2-stage thermostats for the control of two distinct areas, both with integrated PI controller for piloting heating, cooling, valves, 6-way valves, fan coils 2 and 4 pipes. On the front side there is a capacitive bar with swipe function for the implementation of programmable KNX functions. A freely configurable RGB Led bar is also available for displaying states or other quantities available on the KNX bus. Moreover, 32 logic blocks are available to implement simple expressions with logical or threshold operator or complex expressions with algebraic and conditional operators; It is possible to use predefined algorithms as proportional controls of temperature and humidity or dew point calculation. The device also integrates the "Virtual Holder Logic"; the field of application is the hotel room: through a magnetic sensor installed on the door and connected to a digital input, accurate presence information is managed. The presence detection solution can deduce the presence of people in the room using one or more dedicated sensors.


It also detects an unexpected presence and is able to differentiate more behaviors. The OL-U® KNX® series is available in various colors and can be installed on a 2 or 3 module box and is compatible with the main standards (Italian, German, British, Swiss).


| Technical Features | | | |
|--------------------|--|--|--|
| Mechanical data | Device dimensions (without frame): 71x71x25 mm Frame dimensions 3 Modules: 130x92x11 mm | | |
| Mounting | Flush mounted wall box | | |
| Supply | Via EIB/KNX bus 21 ÷ 32V DC Max 30 mA | | |
| Terms of use | Operating temperature: -5 °C +45 °C Storage temperature: -20 °C +55 °C | | |

• Relative humidity (not condensing): max. 90%

How to order







PO71A03MT-xx BK04MT-xx BK42MT-xx BK24MT-xx

BK08MT-xx BK08PLR

SO08A01KNX-3M Hardware + Metal frame included





3 Modules Version

Order Codes

KNX Switch Metal Edition

SO08A01KNX-3M Hardware + Metal Frame

Kit 4 Buttons BK04MT-SH - Silver BK04MT-CH - Champagne BK04MT-GO - Gold BK04MT-BR - Bronze


Kit 4 left + 2 right Buttons BK42MT-SH - Silver BK42MT-CH - Champagne BK42MT-GO - Gold BK42MT-BR - Bronze

Kit 2 left + 4 right Buttons BK24MT-SH - Silver BK24MT-CH - Champagne BK24MT-GO - Gold BK24MT-BR - Bronze

Kit 8 Buttons


BK08MT-SH - Silver BK08MT-CH - Champagne BK08MT-GO - Gold BK08MT-BR - Bronze **BK08PLR** - Raw plastic

Frame 71mm - 3 Modules PO71A03MT-XX Metal - Silver SH, Champagne CH, Gold BR, Bronze BR



3 Modules Version





SO08A01KNX-3M HARDWARE

Metal frame included





BK04MT-SH

BK04MT-CH Champagne









BK42MT-SH Silve

BK42MT-CH Champagne

BK42MT-GO Gold







BK24MT-CH Champagne

BK24MT-GO



BK08MT-CH

Champagne

| - | | - |
|---|--|---|
| - | | - |
| | | |
| - | | |
| | | - |
| | | |

BK08MT-GO Gold



BK08MT-SH

Silve

BK24MT-SH





Kit 4 Buttons - Square







Kit 4 left + 2 right Buttons





BK42MT-BR Bronze

Kit 2 left + 4 right Buttons





BK24MT-BR Bronze





BK08MT-BR Bronze







KNXSWITCHES

KNX Switch



OL-U - LITE VERSION

The KNX plastic switch OL-U in the Lite Version includes button and frames in plastic.

The switch SO0xL02KNX of the OL-U® KNX® series for wall installation is equipped with up to 8 mechanical buttons (16 channels) for managing on/off commands, dimmers, rolling shutters and venetian blinds, or other programmable command and control functions. The device can be configured via the ETS® application program and can communicate with the KNX Data Secure protocol.

The device integrates one 2-stage thermostats for the control of two distinct areas, both with integrated PI controller for piloting heating, cooling, valves, 6-way valves, fan coils 2 and 4 pipes.

A freely configurable RGB Led bar is also available for displaying states or other quantities available on the KNX bus. Moreover, 32 logic blocks are available to implement simple expressions with logical or threshold operator or complex expressions with algebraic and conditional operators; It is possible to use predefined algorithms as proportional controls of temperature and humidity or dew point calculation.

The device also integrates the "Virtual Holder Logic"; the field of application is the hotel room: through a magnetic sensor installed on the door and connected to a digital input, accurate presence information is managed. The presence detection solution can deduce the presence of people in the room using one or more dedicated sensors.

It also detects an unexpected presence and is able to differentiate more behaviors.

The OL-U® KNX® series is available in various colors and can be installed on a 2 or 3 module box and is compatible with the main standards (Italian, German, British, Swiss).

2 Modules Version



Order Codes

KNX Switch LITE Version

SO04L02KNX-1 Hardware + Metal Frame 4 Buttons Painted plastic - White

SO04L02KNX-3 Hardware + Metal Frame 4 Buttons Painted plastic - Black

SO08L02KNX-1 Hardware + Metal Frame 8 Buttons Painted plastic - White

SO08L02KNX-3 Hardware + Metal Frame 8 Buttons Painted plastic - Black

Kit 8 Buttons **BK08PLR** - Raw plastic

Frame 71mm - 2 Modules PO71A01RP-1 Painted plastic - White PO71A01RP-3 Painted plastic - Black







Painted plastic - White



SO04L02KNX-3 Painted plastic - Black







SO08L02KNX-1 Painted plastic - White

SO08L02KNX-3 Painted plastic - Black

How to order

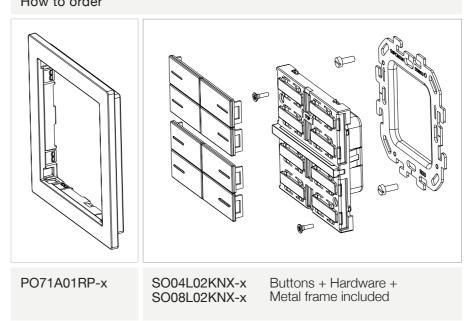


| Technical Features | |
|--------------------|---|
| Mechanical data | Device dimensions (without frame): 71x71x25 mm Frame dimensions 2 Modules: 92x92x11 mm |
| Mounting | Flush mounted wall box |
| Supply | Via ElB/KNX bus 21 ÷ 32V DC Max 30 mA |
| Terms of use | Operating temperature: -5 °C +45 °C Storage temperature: -20 °C +55 °C Relative humidity (not condensing): max. 90% |

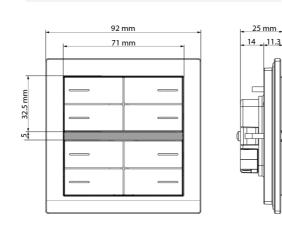

KNX Switch 4 Buttons - LITE VERSION



KNX Switch 8 Buttons - LITE VERSION







OL-U - LITE VERSION

The Lite Version includes finishes for the buttons and frames in plastic.

The switch SO0xL02KNX of the OL-U® KNX® series for wall installation is equipped with up to 8 mechanical buttons (16 channels) for managing on/off commands, dimmers, rolling shutters and venetian blinds, or other programmable command and control functions. The device can be configured via the ETS® application program and can communicate with the KNX Data Secure protocol.

The device integrates one 2-stage thermostats for the control of two distinct areas, both with integrated PI controller for piloting heating, cooling, valves, 6-way valves, fan coils 2 and 4 pipes.

A freely configurable RGB Led bar is also available for displaying states or other quantities available on the KNX bus. Moreover, 32 logic blocks are available to implement simple expressions with logical or threshold operator or complex expressions with algebraic and conditional operators; It is possible to use predefined algorithms as proportional controls of temperature and humidity or dew point calculation.

The device also integrates the "Virtual Holder Logic"; the field of application is the hotel room: through a magnetic sensor installed on the door and connected to a digital input, accurate presence information is managed. The presence detection solution can deduce the presence of people in the room using one or more dedicated sensors.

It also detects an unexpected presence and is able to differentiate more behaviors.

The OL-U® KNX® series is available in various colors and can be installed on a 2 or 3 module box and is compatible with the main standards (Italian, German, British, Swiss).

| 3 | Modules | Version |
|---|---------|---------------|
| | | KNX SECURE |

Order Codes

KNX Switch LITE Version

SO04L02KNX-1-3M Hardware + Metal Frame 3M 4 Buttons Painted plastic - White

SO04L02KNX-3-3M Hardware + Metal Frame 3M 4 Buttons Painted plastic - Black

SO08L02KNX-1-3 Hardware + Metal Frame 3M 8 Buttons Painted plastic - White

SO08L02KNX-3-3 Hardware + Metal Frame 3M 8 Buttons Painted plastic - Black

Kit 8 Buttons BK08PLR - Raw plastic

Frame 71mm - 3 Modules PO71A03RP-1 Painted plastic - White PO71A03RP-3 Painted plastic - Black

3 Modules Version





SO04L02KNX-1-3M Painted plastic - White

SO04L02KNX-3-3M Painted plastic - Black






SO08L02KNX-1-3 Painted plastic - Whit

SO08L02KNX-3-3 Painted plastic - Black

How to order

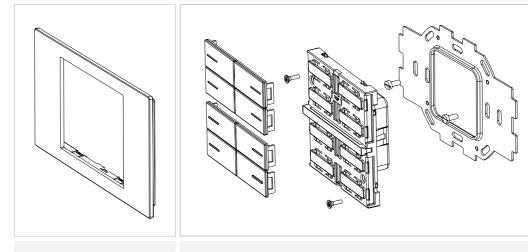


PO71A03RP-x

SO04L02KNX-x-3M SO08L02KNX-x-3M


| Technical Features | |
|--------------------|--|
| Mechanical data | Device dimensions (without frame): 71x71x25 mm Frame dimensions 3 Modules: 130x92x11 mm |
| Mounting | Flush mounted wall box |
| Supply | Via ElB/KNX bus 21 ÷ 32V DC Max 30 mA |
| Terms of use | Operating temperature: -5 °C +45 °C Storage temperature: -20 °C +55 °C |

• Relative humidity (not condensing): max. 90%


KNX Switch 4 Buttons - LITE VERSION



KNX Switch 8 Buttons - LITE VERSION



Buttons + Hardware + Metal frame included



KNX Thermostat



OL-U - REGULAR VERSION

The KNX plastic thermostat OL-U in the Regular Version includes buttons and frames in painted plastic.

The TO04A01KNX environmental sensors is a device of the OL-U® KNX® series for wall installation and feature an LCD display with adjustable backlighting. The device can be configured via the ETS® application program and can communicate with the KNX Data Secure protocol.

The device integrates temperature sensor and two 2-stage thermostats for the control of two distinct areas, both with integrated PI controller for piloting heating, cooling, valves, 6-way valves, fan coils 2 and 4 pipes.

The device is equipped with 4 mechanical buttons (8 channels) for managing on/off commands, dimmers, rolling shutters and venetian blinds, or other programmable command and control functions.

On the front side there is a capacitive bar with swipe function for the implementation of programmable KNX functions.

A freely configurable RGB Led bar is also available for displaying states or other quantities available on the KNX bus. Moreover, 32 logic blocks are available to implement simple expressions with logical or threshold operator or complex expressions with algebraic and conditional operators; It is possible to use predefined algorithms as proportional controls of temperature and humidity or dew point calculation.

The device also integrates the "Virtual Holder Logic"; the field of application is the hotel room: through a magnetic sensor installed on the door and connected to a digital input, accurate presence information is managed. The presence detection solution can deduce the presence of people in the room using one or more dedicated sensors.

It also detects an unexpected presence and is able to differentiate more behaviors.

The OL-U® KNX® series is available in various colors and can be installed on a 2 or 3 module box and is compatible with the main standards (Italian, German, British, Swiss).

| Technical Features | |
|--------------------|---|
| Mechanical data | Device dimensions (without frame): 71x71x25 mm Frame dimensions 2 Modules: 92x92x11 mm |
| Mounting | Flush mounted wall box |
| Supply | Via EIB/KNX bus 21 ÷ 32V DC Max 30 mA |
| Terms of use | Operating temperature: -5 °C +45 °C Storage temperature: -20 °C +55 °C Relative humidity (not condensing): max. 90% |



2 Modules Version

25 mm

14 11.3



Order Codes

KNX Thermostat **REGULAR Version**

TO04A01KNX Hardware + Metal Frame


Kit 4 Buttons BKT4PLL-1 Painted plastic - White BKT4PLL-3 Painted plastic - Black

Kit 8 Buttons **BK08PLR** - Raw plastic

Frame 71mm - 2 Modules PO71A01PL-1 Painted plastic - White PO71A01PL-3 Painted plastic - Black

2 Modules Version





TO04A01KNX HARDWARF

Metal frame included






BKT4PLL-1 Painted plastic - White



How to order

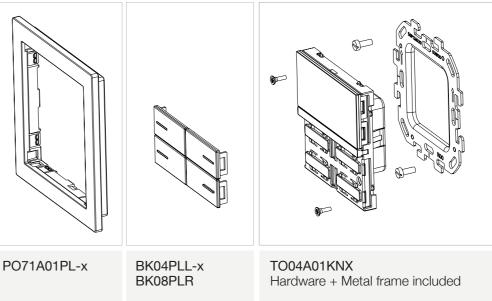



KNX Thermostat **REGULAR VERSION**

Kit 4 Buttons - Rectangular







KNX Thermostat

OL-U - REGULAR VERSION

The Regular Version includes finishes for the buttons and frames in painted plastic.

The TO04A01KNX environmental sensors is a device of the OL-U® KNX® series for wall installation and feature an LCD display with adjustable backlighting. The device can be configured via the ETS® application program and can communicate with the KNX Data Secure protocol.

The device integrates temperature sensor and two 2-stage thermostats for the control of two distinct areas, both with integrated PI controller for piloting heating, cooling, valves, 6-way valves, fan coils 2 and 4 pipes.

The device is equipped with 4 mechanical buttons (8 channels) for managing on/off commands, dimmers, rolling shutters and venetian blinds, or other programmable command and control functions.

On the front side there is a capacitive bar with swipe function for the implementation of programmable KNX functions.

A freely configurable RGB Led bar is also available for displaying states or other quantities available on the KNX bus. Moreover, 32 logic blocks are available to implement simple expressions with logical or threshold operator or complex expressions with algebraic and conditional operators; It is possible to use predefined algorithms as proportional controls of temperature and humidity or dew point calculation. The device also integrates the "Virtual Holder Logic"; the field of application is the hotel room: through a magnetic sensor installed on the door and connected to a digital input, accurate presence information is managed.

The presence detection solution can deduce the presence of people in the room using one or more dedicated sensors.

It also detects an unexpected presence and is able to differentiate more behaviors.

The OL-U® KNX® series is available in various colors and can be installed on a 2 or 3 module box and is compatible with the main standards (Italian, German, British, Swiss).

| Technical Features | |
|--------------------|---|
| Mechanical data | Device dimensions (without frame): 71x71x25 mm Frame dimensions 3 Modules: 130x92x11 mm |
| Mounting | Flush mounted wall box |
| Supply | Via ElB/KNX bus 21 ÷ 32V DC Max 30 mA |
| Terms of use | Operating temperature: -5 °C +45 °C Storage temperature: -20 °C +55 °C Relative humidity (not condensing): max. 90% |

| - 130 |) mm |
|-------|--|
| | Y ECC OFF Č → → → → → → → → → → → → → → → → → → → |
| | |
| | |

3 Modules Version

199

Order Codes

KNX Thermostat **REGULAR Version**

TO04A01KNX-3M Hardware + Metal Frame

Kit 4 Buttons BKT4PLL-1 Painted plastic - White BKT4PLL-3 Painted plastic - Black


Kit 8 Buttons **BK08PLR** - Raw plastic

Frame 71mm - 3 Modules PO71A03PL-1 Painted plastic - White

PO71A03PL-3 Painted plastic - Black







TO04A01KNX-3M HARDWARF


Metal frame included





BKT4PLL-1 Painted plastic - White BKT4PLL-3 Painted plastic - Black

How to order

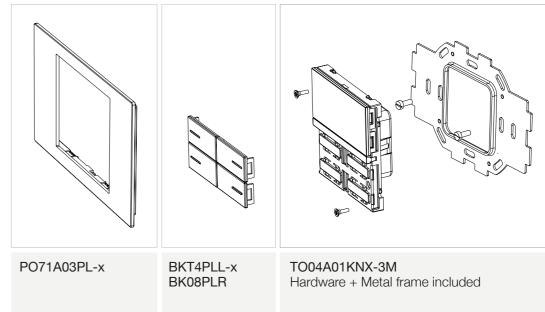




KNX Thermostat **REGULAR VERSION**

Kit 4 Buttons - Rectangular





KNX Thermostat



OL-U - FENIX EDITION

The KNX Fenix thermostat OL-U in the Fenix Edition includes button and frames finished in Fenix.

The TO04A01KNX environmental sensors is a device of the OL-U® KNX® series for wall installation and feature an LCD display with adjustable backlighting. The device can be configured via the ETS® application program and can communicate with the KNX Data Secure protocol.

The device integrates temperature sensor and two 2-stage thermostats for the control of two distinct areas, both with integrated PI controller for piloting heating, cooling, valves, 6-way valves, fan coils 2 and 4 pipes.

The device is equipped with 4 mechanical buttons (8 channels) for managing on/off commands, dimmers, rolling shutters and venetian blinds, or other programmable command and control functions.

On the front side there is a capacitive bar with swipe function for the implementation of programmable KNX functions.

A freely configurable RGB Led bar is also available for displaying states or other quantities available on the KNX bus. Moreover, 32 logic blocks are available to implement simple expressions with logical or threshold operator or complex expressions with algebraic and conditional operators; It is possible to use predefined algorithms as proportional controls of temperature and humidity or dew point calculation.

The device also integrates the "Virtual Holder Logic"; the field of application is the hotel room: through a magnetic sensor installed on the door and connected to a digital input, accurate presence information is managed. The presence detection solution can deduce the presence of people in the room using one or more dedicated sensors.

It also detects an unexpected presence and is able to differentiate more behaviors.

The OL-U® KNX® series is available in various colors and can be installed on a 2 or 3 module box and is compatible with the main standards (Italian, German, British, Swiss).

| Technical Features | |
|--------------------|---|
| Mechanical data | Device dimensions (without frame): 71x71x25 mm Frame dimensions 2 Modules: 92x92x11 mm |
| Mounting | Flush mounted wall box |
| Supply | Via EIB/KNX bus 21 ÷ 32V DC Max 30 mA |
| Terms of use | Operating temperature: -5 °C +45 °C Storage temperature: -20 °C +55 °C Relative humidity (not condensing): max. 90% |



25 mm

14 11.3

2 Modules Version



Order Codes

KNX Thermostat **FENIX Edition**

TO04A01KNX Hardware + Metal Frame

Kit 4 Buttons

BKT4FX-0032 - FENIX White Kos 0032 BKT4FX-0030 - FENIX White Alaska 0030 BKT4FX-0720 - FENIX Black Ingo 0720 BKT4FX-0724 - FENIX Grey Bromo 0724 BKT4FX-0748 - FENIX Beige Arizona 0748 BKT4FX-0754 - FENIX Blue Fes 0754

Kit 8 Buttons **BK08PLR** - Raw plastic

Frame 71mm - 2 Modules PO71A01FX-0XXX

FENIX - White Kos 0032, White Alaska 0030, Black Ingo 0720, Grey Bromo 0724, Beige Arizona 0748, Blue Fes 0754



2 Modules Version





155

TO04A01KNX HARDWARF

Metal frame included





BKT4FX-0030 FENIX White Alaska 0030

BKT4FX-0720 BKT4FX-0724 FENIX Black Ingo 0720 FENIX Grev Bromo 0724






BKT4FX-0754

FENIX Blue Fes 0754



BKT4FX-0748 FENIX Beige Arizona 0748 BKT4FX-0032 FENIX White Kos 0032

How to order

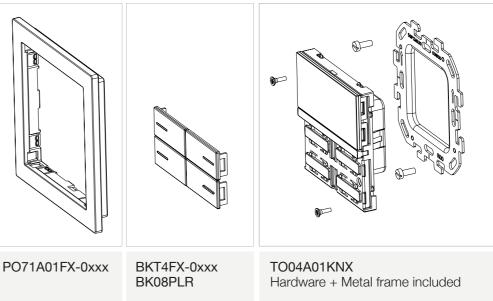

KNXTHERMOSTATS





Kit 4 Buttons - Rectangular





KNX Thermostat



OL-U - FENIX EDITION

The Fenix Edition includes finishes for the buttons and frames in Fenix.

The TO04A01KNX environmental sensors is a device of the OL-U® KNX® series for wall installation and feature an LCD display with adjustable backlighting. The device can be configured via the ETS® application program and can communicate with the KNX Data Secure protocol.

The device integrates temperature sensor and two 2-stage thermostats for the control of two distinct areas, both with integrated PI controller for piloting heating, cooling, valves, 6-way valves, fan coils 2 and 4 pipes.

The device is equipped with 4 mechanical buttons (8 channels) for managing on/off commands, dimmers, rolling shutters and venetian blinds, or other programmable command and control functions.

On the front side there is a capacitive bar with swipe function for the implementation of programmable KNX functions.

A freely configurable RGB Led bar is also available for displaying states or other quantities available on the KNX bus. Moreover, 32 logic blocks are available to implement simple expressions with logical or threshold operator or complex expressions with algebraic and conditional operators; It is possible to use predefined algorithms as proportional controls of temperature and humidity or dew point calculation.

The device also integrates the "Virtual Holder Logic"; the field of application is the hotel room: through a magnetic sensor installed on the door and connected to a digital input, accurate presence information is managed. The presence detection solution can deduce the presence of people in the room using one or more dedicated sensors.

It also detects an unexpected presence and is able to differentiate more behaviors.

The OL-U® KNX® series is available in various colors and can be installed on a 2 or 3 module box and is compatible with the main standards (Italian, German, British, Swiss)

| Technical Features | |
|--------------------|---|
| Mechanical data | Device dimensions (without frame): 71x71x25 mm Frame dimensions 3 Modules: 130x92x11 mm |
| Mounting | Flush mounted wall box |
| Supply | Via EIB/KNX bus 21 ÷ 32V DC Max 30 mA |
| Terms of use | Operating temperature: -5 °C +45 °C Storage temperature: -20 °C +55 °C Relative humidity (not condensing): max. 90% |



3 Modules Version



Order Codes

KNX Thermostat **FENIX Edition**

TO04A01KNX-3M Hardware + Metal Frame

Kit 4 Buttons

BKT4FX-0032 - FENIX White Kos 0032 BKT4FX-0030 - FENIX White Alaska 0030 BKT4FX-0720 - FENIX Black Ingo 0720 BKT4FX-0724 - FENIX Grey Bromo 0724 BKT4FX-0748 - FENIX Beige Arizona 0748 BKT4FX-0754 - FENIX Blue Fes 0754


Kit 8 Buttons **BK08PLR** - Raw plastic

Frame 71mm - 3 Modules PO71A03FX-0XXX

FENIX - White Kos 0032, White Alaska 0030, Black Ingo 0720, Grey Bromo 0724, Beige Arizona 0748, Blue Fes 0754

3 Modules Version





Metal frame included





BKT4FX-0720 FENIX Black Indo 0720








FENIX Blue Fes 0754

BKT4FX-0032 FENIX White Kos 0032

How to order

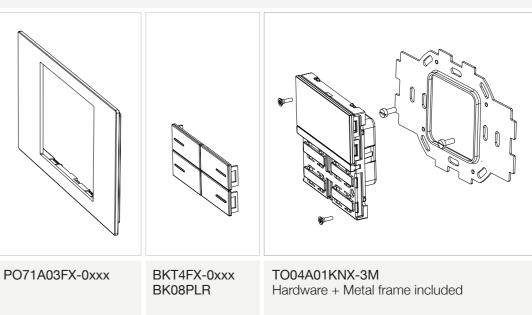



BKT4FX-0030

FENIX White Alaska 0030

FENIX Beige Arizona 0748




Kit 4 Buttons - Rectangular





BKT4FX-0724 FENIX Grey Bromo 0724







KNX Thermostat



OL-U - METAL EDITION

The KNX metal thermostat OL-U in the Metal Edition includes button and frames finished in metal.

The TO04A01KNX environmental sensors is a device of the OL-U® KNX® series for wall installation and feature an LCD display with adjustable backlighting. The device can be configured via the ETS® application program and can communicate with the KNX Data Secure protocol.

The device integrates temperature sensor and two 2-stage thermostats for the control of two distinct areas, both with integrated PI controller for piloting heating, cooling, valves, 6-way valves, fan coils 2 and 4 pipes.

The device is equipped with 4 mechanical buttons (8 channels) for managing on/off commands, dimmers, rolling shutters and venetian blinds, or other programmable command and control functions.

On the front side there is a capacitive bar with swipe function for the implementation of programmable KNX functions.

A freely configurable RGB Led bar is also available for displaying states or other quantities available on the KNX bus. Moreover, 32 logic blocks are available to implement simple expressions with logical or threshold operator or complex expressions with algebraic and conditional operators; It is possible to use predefined algorithms as proportional controls of temperature and humidity or dew point calculation.

The device also integrates the "Virtual Holder Logic"; the field of application is the hotel room: through a magnetic sensor installed on the door and connected to a digital input, accurate presence information is managed. The presence detection solution can deduce the presence of people in the room using one or more dedicated sensors.

It also detects an unexpected presence and is able to differentiate more behaviors.

The OL-U® KNX® series is available in various colors and can be installed on a 2 or 3 module box and is compatible with the main standards (Italian, German, British, Swiss).

| Technical Features | |
|--------------------|---|
| Mechanical data | Device dimensions (without frame): 71x71x25 mm Frame dimensions 2 Modules: 92x92x11 mm |
| Mounting | Flush mounted wall box |
| Supply | Via ElB/KNX bus 21 ÷ 32V DC Max 30 mA |
| Terms of use | Operating temperature: -5 °C +45 °C Storage temperature: -20 °C +55 °C Relative humidity (not condensing): max. 90% |



2 Modules Version

25 mm

14 11.3



Order Codes

KNX Thermostat Metal Edition

TO04A01KNX Hardware + Metal Frame


Kit 4 Buttons BKT4MT-SH - Silver BKT4MT-CH - Champagne BKT4MT-GO - Gold BKT4MT-BR - Bronze

Kit 8 Buttons **BK08PLR** - Raw plastic

Frame 71mm - 2 Modules PO71A01MT-XX Metal - Silver SH, Champagne CH, Gold BR, Bronze BR

2 Modules Version





TO04A01KNX HARDWARF

Metal frame included






BKT4MT-SH

BKT4MT-CH Champagne

BKT4MT-GO Gold

How to order

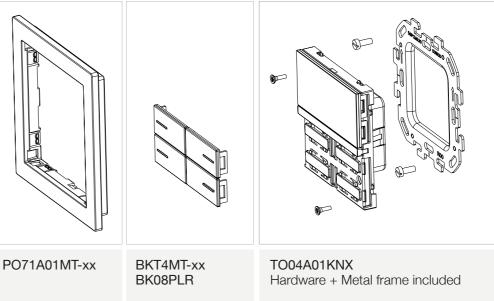



Kit 4 Buttons - Rectangular





BKT4MT-BR



KNX Thermostat



OL-U - METAL EDITION

The Metal Edition includes finishes for the buttons and frames in metal.

The TO04A01KNX environmental sensors is a device of the OL-U® KNX® series for wall installation and feature an LCD display with adjustable backlighting. The device can be configured via the ETS® application program and can communicate with the KNX Data Secure protocol.

The device integrates temperature sensor and two 2-stage thermostats for the control of two distinct areas, both with integrated PI controller for piloting heating, cooling, valves, 6-way valves, fan coils 2 and 4 pipes.

The device is equipped with 4 mechanical buttons (8 channels) for managing on/off commands, dimmers, rolling shutters and venetian blinds, or other programmable command and control functions.

On the front side there is a capacitive bar with swipe function for the implementation of programmable KNX functions.

A freely configurable RGB Led bar is also available for displaying states or other quantities available on the KNX bus. Moreover, 32 logic blocks are available to implement simple expressions with logical or threshold operator or complex expressions with algebraic and conditional operators; It is possible to use predefined algorithms as proportional controls of temperature and humidity or dew point calculation.

The device also integrates the "Virtual Holder Logic"; the field of application is the hotel room: through a magnetic sensor installed on the door and connected to a digital input, accurate presence information is managed. The presence detection solution can deduce the presence of people in the room using one or more dedicated sensors.

It also detects an unexpected presence and is able to differentiate more behaviors.

The OL-U® KNX® series is available in various colors and can be installed on a 2 or 3 module box and is compatible with the main standards (Italian, German, British, Swiss).

| Technical Features | |
|--------------------|---|
| Mechanical data | Device dimensions (without frame): 71x71x25 mm Frame dimensions 3 Modules: 130x92x11 mm |
| Mounting | Flush mounted wall box |
| Supply | Via ElB/KNX bus 21 ÷ 32V DC Max 30 mA |
| Terms of use | Operating temperature: -5 °C +45 °C Storage temperature: -20 °C +55 °C Relative humidity (not condensing): max. 90% |

130 mm

3 Modules Version



Order Codes

KNX Thermostat Metal Edition

TO04A01KNX-3M Hardware + Metal Frame


Kit 4 Buttons BKT4MT-SH - Silver BKT4MT-CH - Champagne BKT4MT-GO - Gold BKT4MT-BR - Bronze

Kit 8 Buttons **BK08PLR** - Raw plastic

Frame 71mm - 3 Modules PO71A03MT-XX Metal - Silver SH, Champagne CH, Gold BR, Bronze BR

3 Modules Version





TO04A01KNX-3M HARDWARF

Metal frame included




BKT4MT-SH

BKT4MT-CH Champagne

BKT4MT-GO Gold

How to order

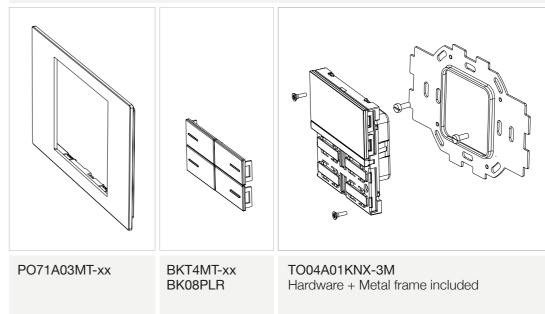






Kit 4 Buttons - Rectangular





BKT4MT-BR Bronze





KNX Thermostat



OL-U - LITE VERSION

The KNX thermostat OL-U includes buttons and frames in plastic.

The TO04L02KNX environmental sensors is a device of the OL-U® KNX® series for wall installation and feature an LCD display with adjustable backlighting. The device can be configured via the ETS® application program and can communicate with the KNX Data Secure protocol.

The device integrates temperature sensor and two 2-stage thermostats for the control of two distinct areas, both with integrated PI controller for piloting heating, cooling, valves, 6-way valves, fan coils 2 and 4 pipes.

The device is equipped with 4 mechanical buttons (8 channels) for managing on/off commands, dimmers, rolling shutters and venetian blinds, or other programmable command and control functions.

A freely configurable RGB Led bar is also available for displaying states or other quantities available on the KNX bus. Moreover, 32 logic blocks are available to implement simple expressions with logical or threshold operator or complex expressions with algebraic and conditional operators; It is possible to use predefined algorithms as proportional controls of temperature and humidity or dew point calculation.

The device also integrates the "Virtual Holder Logic"; the field of application is the hotel room: through a magnetic sensor installed on the door and connected to a digital input, accurate presence information is managed. The presence detection solution can deduce the presence of people in the room using one or more dedicated sensors.

It also detects an unexpected presence and is able to differentiate more behaviors.

The OL-U® KNX® series is available in various colors and can be installed on a 2 or 3 module box and is compatible with the main standards (Italian, German, British, Swiss).

| Technical Features | |
|--------------------|---|
| Mechanical data | Device dimensions (without frame): 71x71x25 mm Frame dimensions 2 Modules: 92x92x11 mm |
| Mounting | Flush mounted wall box |
| Supply | Via EIB/KNX bus 21 ÷ 32V DC Max 30 mA |
| Terms of use | Operating temperature: -5 °C +45 °C Storage temperature: -20 °C +55 °C Relative humidity (not condensing): max. 90% |



25 mm 14 _____11.3



Order Codes

KNX Thermostat Lite Version

TO04L02KNX-1 Hardware + Metal Frame 4 Buttons Painted plastic - White

TO04L02KNX-3 Hardware + Metal Frame 4 Buttons Painted plastic - Black

Kit 8 Buttons BK08PLR - Raw plastic

Frame 71mm - 2 Modules PO71A01RP-1 Painted plastic - White PO71A01RP-3 Painted plastic - Black

2 Modules Version







TO04L02KNX-1 Painted plastic - Whi

TO04L02KNX-3 Painted plastic - Black

How to order

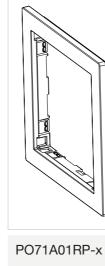

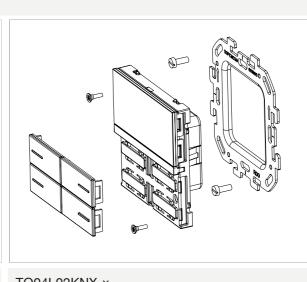

TO04L02KNX-x Buttons + Hardware + Metal frame included

KNX Thermostat 4 Buttons - LITE VERSION





KNX Thermostat



OL-U - LITE VERSION

The Lite Version includes finishes for the buttons and frames in plastic.

The TO04L02KNX environmental sensors is a device of the OL-U® KNX® series for wall installation and feature an LCD display with adjustable backlighting. The device can be configured via the ETS® application program and can communicate with the KNX Data Secure protocol.

The device integrates temperature sensor and two 2-stage thermostats for the control of two distinct areas, both with integrated PI controller for piloting heating, cooling, valves, 6-way valves, fan coils 2 and 4 pipes.

The device is equipped with 4 mechanical buttons (8 channels) for managing on/off commands, dimmers, rolling shutters and venetian blinds, or other programmable command and control functions.


A freely configurable RGB Led bar is also available for displaying states or other quantities available on the KNX bus. Moreover, 32 logic blocks are available to implement simple expressions with logical or threshold operator or complex expressions with algebraic and conditional operators; It is possible to use predefined algorithms as proportional controls of temperature and humidity or dew point calculation. The device also integrates the "Virtual Holder Logic"; the field of application is the hotel room: through a magnetic sensor installed on the door and connected to a digital input, accurate presence information is managed.

The presence detection solution can deduce the presence of people in the room using one or more dedicated sensors.

It also detects an unexpected presence and is able to differentiate more behaviors.

The OL-U® KNX® series is available in various colors and can be installed on a 2 or 3 module box and is compatible with the main standards (Italian, German, British, Swiss).

| Technical Features | |
|--------------------|---|
| Mechanical data | Device dimensions (without frame): 71x71x25 mm Frame dimensions 3 Modules: 130x92x11 mm |
| Mounting | Flush mounted wall box |
| Supply | Via ElB/KNX bus 21 ÷ 32V DC Max 30 mA |
| Terms of use | Operating temperature: -5 °C +45 °C Storage temperature: -20 °C +55 °C Relative humidity (not condensing): max. 90% |

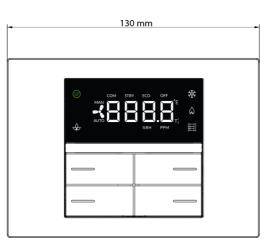

3 Modules Version



Order Codes

KNX Thermostat LITE Version

TO04L02KNX-1-3 Hardware + Metal Frame 3M 4 Buttons Painted plastic - White

TO04L02KNX-3-3 Hardware + Metal Frame 3M 4 Buttons Painted plastic - Black

Kit 8 Buttons BK08PLR - Raw plastic

Frame 71mm - 3 Modules PO71A03RP-1 Painted plastic - White PO71A03RP-3 Painted plastic - Black

3 Modules Version






TO04L02KNX-1-3 Painted plastic - White


TO04L02KNX-3-3 Painted plastic - Black

How to order

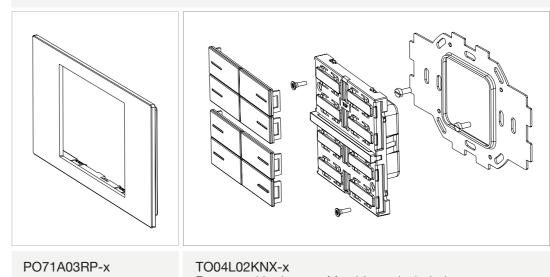


KNXTHERMOSTATS

KNX Thermostat 4 Buttons - LITE VERSION



Buttons + Hardware + Metal frame included



OL-U - REGULAR VERSION

The Regular Version includes finishes for the buttons and frames in painted plastic. The Thermostat/Humidistat HO04A01KNX environmental sensors is a device of the OL-U® KNX® series for wall installation and feature an LCD display with adjustable backlighting. The device can be configured via the ETS® application program and can communicate with the KNX Data Secure protocol.

The device integrates temperature sensor and humidity sensors, two 2-stage thermostats for the control of two distinct areas, both with integrated PI controller for piloting heating, cooling, valves, 6-way valves, fan coils 2 and 4 pipes. The humidity sensor manages the reading of the relative humidity in the environment and allows threshold control with hysteresis of humidification and dehumidification devices.

The device is equipped with 4 mechanical buttons (8 channels) for managing on/off commands, dimmers, rolling shutters and venetian blinds, or other programmable command and control functions.

On the front side there is a capacitive bar with swipe function for the implementation of programmable KNX functions.

A freely configurable RGB Led bar is also available for displaying states or other quantities available on the KNX bus. Moreover, 32 logic blocks are available to implement simple expressions with logical or threshold operator or complex expressions with algebraic and conditional operators; It is possible to use predefined algorithms as proportional controls of temperature and humidity or dew point calculation. The device also integrates the "Virtual Holder Logic"; the field of application is the hotel room: through a magnetic sensor installed on the door and connected to a digital input, accurate presence information is managed.

The presence detection solution can deduce the presence of people in the room using one or more dedicated sensors.

It also detects an unexpected presence and is able to differentiate more behaviors. The OL-U® KNX® series is available in various colors and can be installed on a 2 or 3 module box and is compatible with the main standards (Italian, German, British, Swiss).

| Technical Features | |
|--------------------|---|
| Mechanical data | Device dimensions (without frame): 71x71x25 mm Frame dimensions 2 Modules: 92x92x11 mm |
| Mounting | Flush mounted wall box |
| Supply | Via ElB/KNX bus 21 ÷ 32V DC Max 30 mA |
| Terms of use | Operating temperature: -5 °C +45 °C Storage temperature: -20 °C +55 °C Relative humidity (not condensing): max. 90% |



71 mm

25 mm

14 11.3

2 Modules Version



Order Codes

KNX Thermostat/Humidistat **REGULAR Version**

HO04A01KNX Hardware + Metal Frame

Kit 4 Buttons BKT4PLL-1 Painted plastic - White BKT4PLL-3 Painted plastic - Black

Kit 8 Buttons BK08PLR - Raw plastic

Frame 71mm - 2 Modules PO71A01PL-1 Painted plastic - White PO71A01PL-3 Painted plastic - Black

2 Modules Version





HO04A01KNX HARDWARF

Metal frame included






BKT4PLL-1 Painted plastic - White



How to order

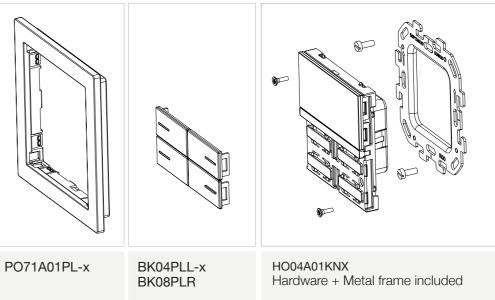

KNXTHERMOSTATS

KNX Thermostat/Humidistat

REGULAR VERSION

Kit 4 Buttons - Rectangular







OL-U - REGULAR VERSION

The Regular Version includes finishes for the buttons and frames in painted plastic. The Thermostat/Humidistat HO04A01KNX environmental sensors is a device of the OL-U® KNX® series for wall installation and feature an LCD display with adjustable backlighting. The device can be configured via the ETS® application program and can communicate with the KNX Data Secure protocol.

The device integrates temperature sensor and humidity sensors and two 2-stage thermostats for the control of two distinct areas, both with integrated PI controller for piloting heating, cooling, valves, 6-way valves, fan coils 2 and 4 pipes. The humidity sensor manages the reading of the relative humidity in the environment and allows threshold control with hysteresis of humidification and dehumidification devices.

The device is equipped with 4 mechanical buttons (8 channels) for managing on/off commands, dimmers, rolling shutters and venetian blinds, or other programmable command and control functions.

On the front side there is a capacitive bar with swipe function for the implementation of programmable KNX functions.


A freely configurable RGB Led bar is also available for displaying states or other quantities available on the KNX bus. Moreover, 32 logic blocks are available to implement simple expressions with logical or threshold operator or complex expressions with algebraic and conditional operators; It is possible to use predefined algorithms as proportional controls of temperature and humidity or dew point calculation. The device also integrates the "Virtual Holder Logic"; the field of application is the hotel room: through a magnetic sensor installed on the door and connected to a digital input, accurate presence information is managed.

The presence detection solution can deduce the presence of people in the room using one or more dedicated sensors.

It also detects an unexpected presence and is able to differentiate more behaviors. The OL-U® KNX® series is available in various colors and can be installed on a 2 or 3 module box and is compatible with the main standards (Italian, German, British, Swiss).

Technical Features Mechanical data • Device dimensions (without frame): 71x71x25 mm • Frame dimensions 3 Modules: 130x92x11 mm Mounting • Flush mounted wall box

| Supply | Via ElB/KNX bus 21 ÷ 32V DC Max 30 mA |
|--------------|---|
| Terms of use | Operating temperature: -5 °C +45 °C Storage temperature: -20 °C +55 °C Relative humidity (not condensing): max. 90% |

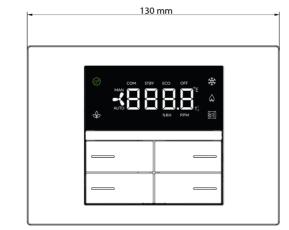

3 Modules Version



Order Codes

KNX Thermostat/Humidistat **REGULAR Version**

HO04A01KNX-3M Hardware + Metal Frame

Kit 4 Buttons BKT4PLL-1 Painted plastic - White BKT4PLL-3 Painted plastic - Black

Kit 8 Buttons BK08PLR - Raw plastic

Frame 71mm - 3 Modules PO71A03PL-1 Painted plastic - White

PO71A03PL-3 Painted plastic - Black

3 Modules Version





HO04A01KNX-3M HARDWARF


Metal frame included





BKT4PLL-1 Painted plastic - White BKT4PLL-3 Painted plastic - Black

How to order

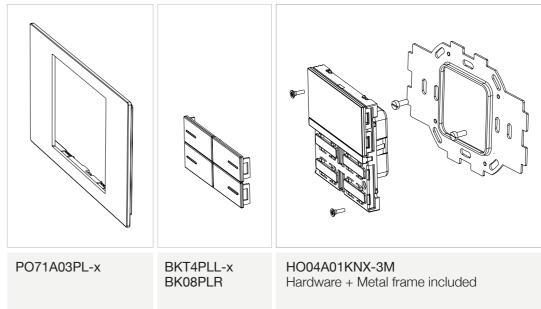


KNX Thermostat/Humidistat

REGULAR VERSION

Kit 4 Buttons - Rectangular









OL-U - FENIX EDITION

The Fenix Edition includes finishes for the buttons and frames in Fenix. The Thermostat/Humidistat HO04A01KNX environmental sensors is a device of the OL-U® KNX® series for wall installation and feature an LCD display with adjustable backlighting. The device can be configured via the ETS® application program and can communicate with the KNX Data Secure protocol.

The device integrates temperature sensor and humidity sensors two 2-stage thermostats for the control of two distinct areas, both with integrated PI controller for piloting heating, cooling, valves, 6-way valves, fan coils 2 and 4 pipes. The humidity sensor manages the reading of the relative humidity in the environment and allows threshold control with hysteresis of humidification and dehumidification devices. The device is equipped with 4 mechanical buttons (8 channels) for managing on/off commands, dimmers, rolling shutters and venetian blinds, or other programmable command and control functions. On the front side there is a capacitive bar with swipe function for the implementation of programmable KNX functions.

A freely configurable RGB Led bar is also available for displaying states or other quantities available on the KNX bus. Moreover, 32 logic blocks are available to implement simple expressions with logical or threshold operator or complex expressions with algebraic and conditional operators; It is possible to use predefined algorithms as proportional controls of temperature and humidity or dew point calculation. The device also integrates the "Virtual Holder Logic"; the field of application is the hotel room: through a magnetic sensor installed on the door and connected to a digital input, accurate presence information is managed.

The presence detection solution can deduce the presence of people in the room using one or more dedicated sensors.

It also detects an unexpected presence and is able to differentiate more behaviors.

The OL-U® KNX® series is available in various colors and can be installed on a 2 or 3 module box and is compatible with the main standards (Italian, German, British, Swiss).

| Technical Features | |
|--------------------|---|
| Mechanical data | Device dimensions (without frame): 71x71x25 mm Frame dimensions 2 Modules: 92x92x11 mm |
| Mounting | Flush mounted wall box |
| Supply | • Via EIB/KNX bus 21 ÷ 32V DC |
| Terms of use | Operating temperature: -5 °C +45 °C Storage temperature: -20 °C +55 °C Relative humidity (not condensing): max. 90% |



2 Modules Version



Order Codes

KNX Thermostat/Humidistat **FENIX Edition**

HO04A01KNX Hardware + Metal Frame

Kit 4 Buttons

BKT4FX-0032 - FENIX White Kos 0032 BKT4FX-0030 - FENIX White Kos 0032 BKT4FX-0720 - FENIX Black Ingo 0720 BKT4FX-0724 - FENIX Grey Bromo 0724 BKT4FX-0748 - FENIX Beige Arizona 0748 BKT4FX-0754 - FENIX Blue Fes 0754

Kit 8 Buttons **BK08PLR** - Raw plastic

Frame 71mm - 2 Modules PO71A01FX-0XXX FENIX - White Kos 0032, White Alaska 0030,


Black Ingo 0720, Grey Bromo 0724, Beige Arizona 0748, Blue Fes 0754

25 mm

14 11.3

2 Modules Version





HO04A01KNX HARDWARF

Metal frame included







BKT4FX-0030 FFNIX White Alaska 0030

BKT4FX-0720 BKT4FX-0724 FENIX Black Ingo 0720 FENIX Grey Bromo 0724






FENIX Blue Fes 0754



BKT4FX-0748 FENIX Beige Arizona 0748

BKT4FX-0032 FENIX White Kos 0032

How to order

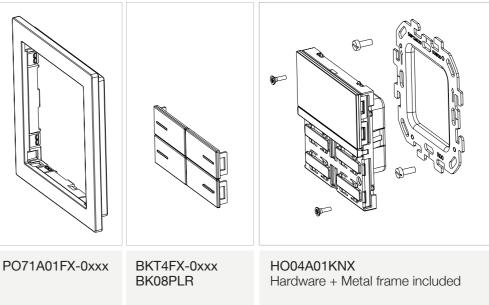

KNX Thermostat/Humidistat FENIX EDITION

Kit 4 Buttons - Rectangular







OL-U - FENIX EDITION

The Fenix Edition includes finishes for the buttons and frames in Fenix. The Thermostat/Humidistat HO04A01KNX environmental sensors is a device of the OL-U® KNX® series for wall installation and feature an LCD display with adjustable backlighting. The device can be configured via the ETS® application program and can communicate with the KNX Data Secure protocol.

The device integrates temperature sensor and humidity sensors, two

2-stage thermostats for the control of two distinct areas, both with

integrated PI controller for piloting heating, cooling, valves, 6-way valves,

fan coils 2 and 4 pipes. The humidity sensor manages the reading of the

relative humidity in the environment and allows threshold control with

The device is equipped with 4 mechanical buttons (8 channels) for

managing on/off commands, dimmers, rolling shutters and venetian blinds,

On the front side there is a capacitive bar with swipe function for the

A freely configurable RGB Led bar is also available for displaying states

hysteresis of humidification and dehumidification devices.

or other programmable command and control functions.

implementation of programmable KNX functions.



Order Codes

KNX Thermostat/Humidistat **FENIX Edition**

HO04A01KNX-3M Hardware + Metal Frame

Kit 4 Buttons


BKT4FX-0032 - FENIX White Kos 0032 BKT4FX-0030 - FENIX White Kos 0032 BKT4FX-0720 - FENIX Black Ingo 0720 BKT4FX-0724 - FENIX Grey Bromo 0724 BKT4FX-0748 - FENIX Beige Arizona 0748 BKT4FX-0754 - FENIX Blue Fes 0754

Kit 8 Buttons **BK08PLR** - Raw plastic

Frame 71mm - 3 Modules PO71A03FX-0XXX

FENIX - White Kos 0032, White Alaska 0030, Black Ingo 0720, Grey Bromo 0724, Beige Arizona 0748, Blue Fes 0754





HO04A01KNX-3M HARDWARF

225

3 Modules Version

Metal frame included





BKT4FX-0030 FENIX White Alaska 0030

BKT4FX-0720 FENIX Black Ingo 0720

15.5,



BKT4FX-0754 FENIX Blue Fes 0754




FENIX White Kos 0032

How to order

BKT4FX-0748


FENIX Beige Arizona 0748

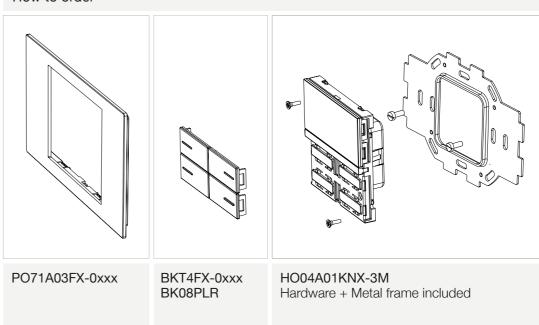

or other quantities available on the KNX bus. Moreover, 32 logic blocks are available to implement simple expressions with logical or threshold operator or complex expressions with algebraic and conditional operators; It is possible to use predefined algorithms as proportional controls of temperature and humidity or dew point calculation. The device also integrates the "Virtual Holder Logic"; the field of application is the hotel room: through a magnetic sensor installed on the door and connected to a digital input, accurate presence information is managed.

The presence detection solution can deduce the presence of people in the room using one or more dedicated sensors. It also detects an unexpected presence and is able to differentiate more behaviors. The OL-U® KNX® series is available in various colors and can be installed on a 2 or 3 module box and is compatible with the main standards (Italian, German, British, Swiss).

| Technical Features | |
|--------------------|---|
| Mechanical data | Device dimensions (without frame): 71x71x25 mm Frame dimensions 3 Modules: 130x92x11 mm |
| Mounting | Flush mounted wall box |
| Supply | Via EIB/KNX bus 21 ÷ 32V DC Max 30 mA |
| Terms of use | Operating temperature: -5 °C +45 °C Storage temperature: -20 °C +55 °C Relative humidity (not condensing): max. 90% |

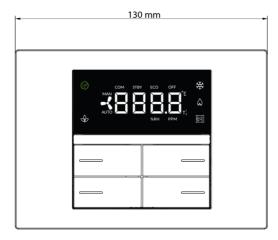

3 Modules Version



KNX Thermostat/Humidistat FENIX EDITION


Kit 4 Buttons - Rectangular





BKT4FX-0724 FENIX Grey Bromo 0724





Mounting box not included



OL-U - METAL EDITION

The Metal Edition includes finishes for the buttons and frames in metal The Thermostat/Humidistat HO04A01KNX environmental sensors is a device of the OL-U® KNX® series for wall installation and feature an LCD display with adjustable backlighting. The device can be configured via the ETS® application program and can communicate with the KNX Data Secure protocol.

The device integrates temperature sensor and humidity sensors, two 2-stage thermostats for the control of two distinct areas, both with integrated PI controller for piloting heating, cooling, valves, 6-way valves, fan coils 2 and 4 pipes. The humidity sensor manages the reading of the relative humidity in the environment and allows threshold control with hysteresis of humidification and dehumidification devices.

The device is equipped with 4 mechanical buttons (8 channels) for managing on/off commands, dimmers, rolling shutters and venetian blinds, or other programmable command and control functions.

On the front side there is a capacitive bar with swipe function for the implementation of programmable KNX functions.

A freely configurable RGB Led bar is also available for displaying states or other quantities available on the KNX bus. Moreover, 32 logic blocks are available to implement simple expressions with logical or threshold operator or complex expressions with algebraic and conditional operators; It is possible to use predefined algorithms as proportional controls of temperature and humidity or dew point calculation. The device also integrates the "Virtual Holder Logic"; the field of application is the hotel room: through a magnetic sensor installed on the door and connected to a digital input, accurate presence information is managed.

The presence detection solution can deduce the presence of people in the room using one or more dedicated sensors.

It also detects an unexpected presence and is able to differentiate more behaviors. The OL-U® KNX® series is available in various colors and can be installed on a 2 or 3 module box and is compatible with the main standards (Italian, German, British, Swiss).

| Technical Features | |
|--------------------|---|
| Mechanical data | Device dimensions (without frame): 71x71x25 mm Frame dimensions 2 Modules: 92x92x11 mm |
| Mounting | Flush mounted wall box |
| Supply | Via ElB/KNX bus 21 ÷ 32V DC Max 30 mA |
| Terms of use | Operating temperature: -5 °C +45 °C Storage temperature: -20 °C +55 °C Relative humidity (not condensing): max. 90% |



2 Modules Version

25 mm

14 11.3



Order Codes

KNX Thermostat/Humidistat METAL Edition

HO04A01KNX Hardware + Metal Frame


Kit 4 Buttons BKT4MT-SH - Silver BKT4MT-CH - Champagne BKT4MT-GO - Gold BKT4MT-BR - Bronze

Kit 8 Buttons **BK08PLR** - Raw plastic

Frame 71mm - 2 Modules PO71A01MT-XX Metal - Silver SH, Champagne CH, Gold BR, Bronze BR

2 Modules Version





HO04A01KNX HARDWARF

Metal frame included






BKT4MT-SH

BKT4MT-CH Champagne

BKT4MT-GO

How to order

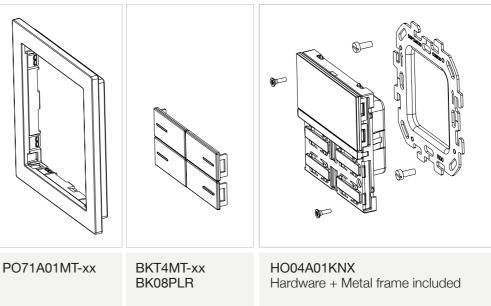

KNX Thermostat/Humidistat METAL EDITION

Kit 4 Buttons - Rectangular





BKT4MT-BR Bronze



OL-U - METAL EDITION

The Metal Edition includes finishes for the buttons and frames in metal. The Thermostat/Humidistat HO04A01KNX environmental sensors is a device of the OL-U® KNX® series for wall installation and feature an LCD display with adjustable backlighting. The device can be configured via the ETS® application program and can communicate with the KNX Data Secure protocol.

The device integrates temperature sensor and humidity sensors, two 2-stage thermostats for the control of two distinct areas, both with integrated PI controller for piloting heating, cooling, valves, 6-way valves, fan coils 2 and 4 pipes. The humidity sensor manages the reading of the relative humidity in the environment and allows threshold control with hysteresis of humidification and dehumidification devices.

The device is equipped with 4 mechanical buttons (8 channels) for managing on/off commands, dimmers, rolling shutters and venetian blinds, or other programmable command and control functions.


On the front side there is a capacitive bar with swipe function for the implementation of programmable KNX functions.

A freely configurable RGB Led bar is also available for displaying states or other quantities available on the KNX bus. Moreover, 32 logic blocks are available to implement simple expressions with logical or threshold operator or complex expressions with algebraic and conditional operators; It is possible to use predefined algorithms as proportional controls of temperature and humidity or dew point calculation. The device also integrates the "Virtual Holder Logic"; the field of application is the hotel room: through a magnetic sensor installed on the door and connected to a digital input, accurate presence information is managed.

The presence detection solution can deduce the presence of people in the room using one or more dedicated sensors.

It also detects an unexpected presence and is able to differentiate more behaviors. The OL-U® KNX® series is available in various colors and can be installed on a 2 or 3 module box and is compatible with the main standards (Italian, German, British, Swiss).

| Technical Features | |
|--------------------|---|
| Mechanical data | Device dimensions (without frame): 71x71x25 mm Frame dimensions 3 Modules: 130x92x11 mm |
| Mounting | Flush mounted wall box |
| Supply | Via ElB/KNX bus 21 ÷ 32V DC Max 30 mA |
| Terms of use | Operating temperature: -5 °C +45 °C Storage temperature: -20 °C +55 °C Relative humidity (not condensing): max. 90% |

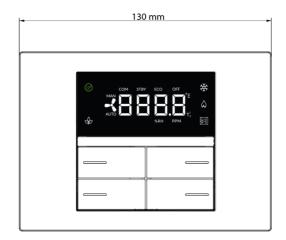

3 Modules Version



Order Codes

KNX Thermostat/Humidistat METAL Edition

HO04A01KNX-3M Hardware + Metal Frame


Kit 4 Buttons BKT4MT-SH - Silver BKT4MT-CH - Champagne BKT4MT-GO - Gold BKT4MT-BR - Bronze

Kit 8 Buttons **BK08PLR** - Raw plastic

Frame 71mm - 3 Modules PO71A03MT-XX Metal - Silver SH, Champagne CH, Gold BR, Bronze BR

3 Modules Version





HO04A01KNX-3M HARDWARF

Metal frame included




BKT4MT-SH

BKT4MT-CH Champagne

BKT4MT-GO

How to order

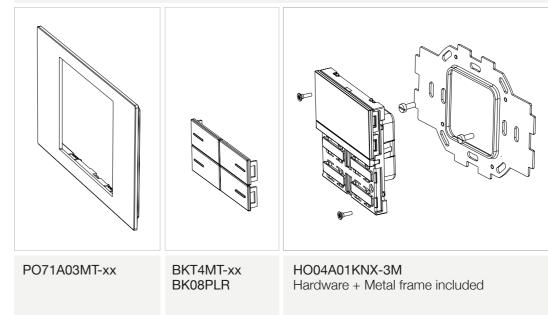




KNX Thermostat/Humidistat METAL EDITION

Kit 4 Buttons - Rectangular



BKT4MT-BR Bronze





Multisensor Thermostat/Humidistat CO,



OI -U - REGULAR VERSION

The KNX plastic multisensor OL-U in the Regular Version includes buttons and frames in painted plastic.

The MO04A01KNX environmental sensor is a device of the OL-U® KNX® series for wall installation and is equipped with an LCD display with adjustable backlighting.

The device integrates temperature, humidity and CO2 sensors and two 2-stage thermostats for the control of two distinct areas, both with integrated PI controller for piloting heating, cooling, valves, 6-way valves, fan coils 2 and 4 pipes. The humidity sensor manages the reading of the relative humidity in the environment and allows threshold control with hysteresis of humidification and dehumidification devices.

The device is equipped with 4 mechanical buttons (4 channels) for managing on/off commands, dimmers, rolling shutters and venetian blinds, or other programmable command and control functions. On the front side of the MO04A01KNX, there is a capacitive bar with swipe function for the implementation of programmable KNX functions. A freely configurable RGB Led bar is also available for displaying states or other quantities available on the KNX bus. Moreover, 32 logic blocks are available to implement simple expressions with logical or threshold operator or complex expressions with algebraic and conditional operators; It is possible to use predefined algorithms as proportional controls of temperature and humidity or dew point calculation. The device also integrates the "Virtual Holder Logic"; the field of application is the hotel room: through a magnetic sensor installed on the door and connected to a digital input, accurate presence information is managed. The presence detection solution can deduce the presence of people in the room using one or more dedicated sensors.

It also detects an unexpected presence and is able to differentiate more behaviours. The OL-U® KNX® series is available in various colours and can be installed on a 2 or 3 module box and is compatible with the main standards (Italian, German, British, Swiss).

| Technical Features | |
|--------------------|--|
| Mechanical data | Device dimensions (without frame): 71x71x25 mm Frame dimensions 2 Modules: 92x92x11 mm |
| Mounting | Flush mounted wall box |
| Supply | Via ElB/KNX bus 21 ÷ 32V DC Max 30 mA |
| Terms of use | Reference standards: EN 50491-2 Operating temperature: -5 °C +45 °C Storage temperature: -20 °C +55 °C Relative humidity (not condensing): max. 90% |

2 Modules Version



Order Codes

KNX Multisensor REGULAR Version MO04A01KNX-1 Hardware White + Frame Metal

MO04A01KNX-3 Hardware Black + Frame Metal

Kit 4 Buttons Multisensor BKM4PLL-1 Painted plastic - White BKM4PLL-3 Painted plastic - Black

Kit 8 Buttons **BK08PLR** - Raw plastic

Frame 71mm - 2 Modules PO71A01PL-1 Painted plastic - White PO71A01PL-3 Painted plastic - Black

2 Modules Version







MO04A01KNX-1 HARDWARF - White

MO04A01KNX-3 HARDWARF - Black






BKM4PLL-1 Painted plastic - White


BKM4PLL-3 Painted plastic - Black

How to order

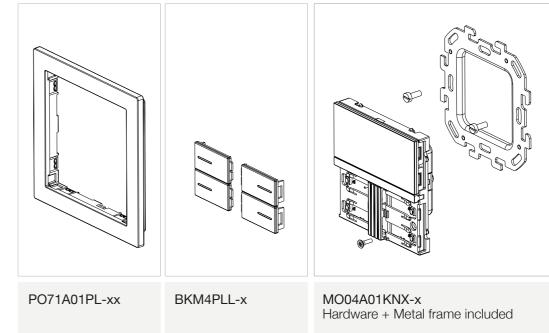

KNXTHERMOSTATS





Kit 4 Buttons - Rectangular





Multisensor Thermostat/Humidistat CO₂



OL-U - REGULAR & LITE VERSION

The KNX plastic multisensor OL-U in the Regular Version includes buttons and frames in painted plastic.

The MO04A01KNX environmental sensor is a device of the OL-U® KNX® series for wall installation and is equipped with an LCD display with adjustable backlighting. The device integrates temperature, humidity and CO2 sensors and two 2-stage thermostats for the control of two distinct areas, both with integrated PI controller for piloting heating, cooling, valves, 6-way valves, fan coils 2 and 4 pipes.. The humidity sensor manages the reading of the relative humidity in the environment and allows threshold control with hysteresis of humidification and dehumidification devices.

The device is equipped with 4 mechanical buttons (4 channels) for managing on/off commands, dimmers, rolling shutters and venetian blinds, or other programmable command and control functions. On the front side of the MO04A01KNX, there is a capacitive bar with swipe function for the implementation of programmable KNX functions. A freely configurable RGB Led bar is also available for displaying states or other quantities available on the KNX bus. Moreover, 32 logic blocks are available to implement simple expressions with logical or threshold operator or complex expressions with algebraic and conditional operators;

It is possible to use predefined algorithms as proportional controls of temperature and humidity or dew point calculation. The device also integrates the "Virtual Holder Logic"; the field of application is the hotel room: through a magnetic sensor installed on the door and connected to a digital input, accurate presence information is managed. The presence detection solution can deduce the presence of people in the room using one or more dedicated sensors.

It also detects an unexpected presence and is able to differentiate more behaviours. The OL-U® KNX® series is available in various colours and can be installed on a 2 or 3 module box and is compatible with the main standards (Italian, German, British, Swiss).

| Technical Features | |
|--------------------|--|
| Mechanical data | Device dimensions (without frame): 71x71x25 mm Frame dimensions 3 Modules: 130x92x11 mm |
| Mounting | Flush mounted wall box |
| Supply | Via ElB/KNX bus 21 ÷ 32V DC Max 30 mA |
| Terms of use | Reference standards: EN 50491-2 Operating temperature: -5 °C +45 °C Storage temperature: -20 °C +55 °C Relative humidity (not condensing): max. 90% |

3 Modules Version



Order Codes

KNX Multisensor REGULAR Version

MO04A01KNX-1-3M Hardware White + Frame Metal 3M MO04A01KNX-3-3M Hardware Black + Frame Metal 3M

Kit 4 Buttons Multisensor BKM4PLL-1 Painted plastic - White BKM4PLL-3 Painted plastic - Black

Kit 8 Buttons BK08PLR - Raw plastic

Frame 71mm - 3 Modules PO71A03PL-1 Painted plastic - White PO71A03PL-3 Painted plastic - Black

3 Modules Version







MO04A01KNX-1-3M HARDWARE - White


MO04A01KNX-3-3M HARDWARF - Black






BKM4PLL-1 Painted plastic - White **BKM4PLL-3** Painted plastic - Black


How to order

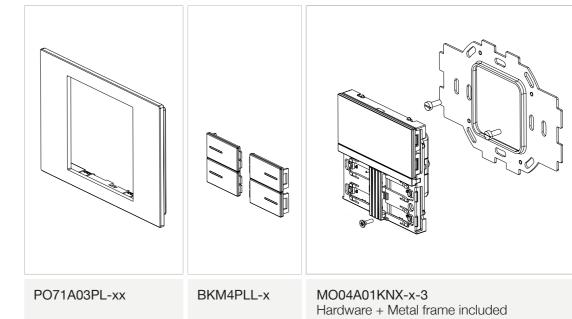





Kit 4 Buttons - Rectangular



FRAMEDEVICES

Frame 71mm - 3 Modules Metal frame included

Regular version - 3 Modules

FENIX edition - 3 Modules

Metal edition - 3 Modules

PO71A03MT-BR - Bronze

Lite version - 3 Modules

PO71A03MT-CH - Champagne PO71A03MT-GO - Gold

PO71A03MT-SH - Silver

PO71A03PL-1 Painted plastic - white

PO71A03PL-3 Painted plastic - black

PO71A03FX-0032 FENIX White Kos 0032

PO71A03FX-0720 FENIX Black Ingo 0720

PO71A03FX-0754 FENIX Blue Fes 0754

PO71A03RP-1 Painted plastic - white

PO71A03RP-3 Painted plastic - black

PO71A03FX-0724 FENIX Grey Bromo 0724

PO71A03FX-0748 FENIX Beige Arizona 0748


PO71A03FX-0030 FENIX White Alaska 0030

OL-U Frame 71MM

FOR DEVICES 2 AND 3 MODULES

OL-U® Series Frames can be installed on two or three module boxes and are compatible with all the main standards. Frames are available in Metal, FENIX® and painted plastic.



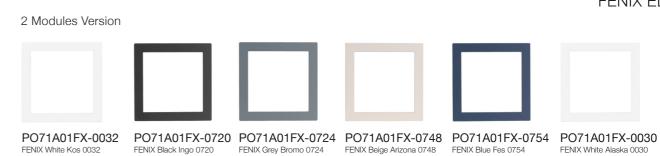

3 Modules Version




2 Modules Version



3 Modules Version





2 Modules Version




PO71A01PL-1 PO71A01PL-3 Painted plastic white Painted plastic black

PO71A03PL-1 Painted plastic white

3 Modules Version

PO71A03PL-3 Painted plastic black

Frame 71MM **REGULAR VERSION**



2 Modules Version

3 Modules Version





PO71A01RP-1 Painted plastic white

PO71A01RP-3 Painted plastic black

PO71A03RP-1 Painted plastic white



Frame 71mm - 2 Modules Metal frame included


Regular version - 2 Modules PO71A01PL-1 Painted plastic - white PO71A01PL-3 Painted plastic - black

FENIX edition - 2 Modules

PO71A01FX-0032 FENIX White Kos 0032 PO71A01FX-0030 FENIX White Alaska 0030 PO71A01FX-0720 FENIX Black Ingo 0720 PO71A01FX-0724 FENIX Grey Bromo 0724 PO71A01FX-0748 FENIX Beige Arizona 0748 PO71A01FX-0754 FENIX Blue Fes 0754

Metal edition - 2 Modules PO71A01MT-SH - Silver PO71A01MT-CH - Champagne PO71A01MT-GO - Gold PO71A01MT-BR - Bronze

Lite version - 2 Modules PO71A01RP-1 Painted plastic - white PO71A01RP-3 Painted plastic - black

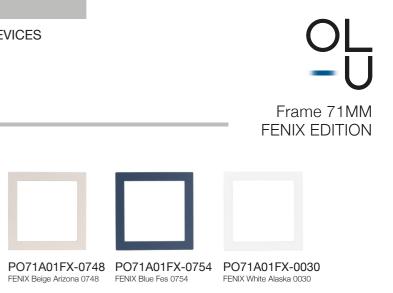

Frame 71MM FENIX EDITION



PO71A03FX-0748 FENIX Beige Arizona 0748

PO71A03FX-0754 FENIX Blue Fes 0754



Frame 71MM METAL EDITION



PO71A03RP-3 Painted plastic black

Frame 71MM METAL EDITION

Frame 71MM LITE VERSION


OL-U Frame 55MM

2 MODULES

The 55 mm OL-U® Series Frames can be installed on a two-module box and are compatible with all major standards. Frames are available in Metal, FENIX® and painted plastic.

Socket compatibility:

- Berker S.1/B.3/B.7
- Gira System 55
- Merten System M
- Smarterliving bv
- Jung serie A/AS



Order Codes

Frame 55mm - 2 Modules

Regular version - 2 Modules

PO55A01PL-1 Painted plastic - white PO55A01PL-3 Painted plastic - black

FENIX edition - 2 Modules

PO55A01FX-0032 FENIX White Kos 0032 PO55A01FX-0030 FENIX White Alaska 0030 PO55A01FX-0720 FENIX Black Ingo 0720 PO55A01FX-0724 FENIX Grey Bromo 0724 PO55A01FX-0748 FENIX Beige Arizona 0748 PO55A01FX-0754 FENIX Blue Fes 0754

Metal edition - 2 Modules


PO55A01MT-SH - Silver PO55A01MT-CH - Champagne PO55A01MT-GO - Gold PO55A01MT-BR - Bronze

Metal frames - 2 modules

FOXXA01-2M - 1pc. FOXXA02-2M - 10pcs.



2 Modules Version

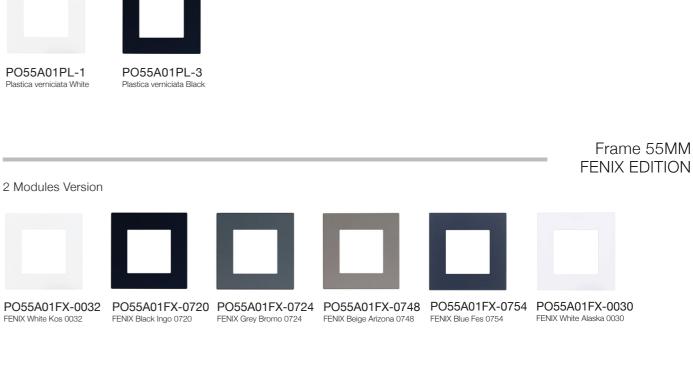

FENIX White Kos 0032


2 Modules Version



Gold

PO55A01MT-SH Champagne PO55A01MT-GO PO55A01MT-BR Bronze

How to order

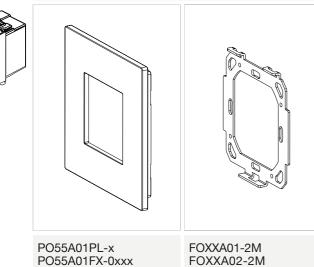

PO55A01MT-xx

FOXXA02-2M



Frame 55MM METAL EDITION

OL-U Frame 60MM

2 MODULES

60 mm OL-U® Series Frames can be installed on two-module boxes and are compatible with all major standards. Frames are available in Metal, FENIX® and painted plastic.

Socket compatibility: - Feller Ediziodue



Order Codes

Frame 60mm - 2 Modules Regular version - 2 Modules PO60A01PL-1 Painted plastic - white PO60A01PL-3 Painted plastic - black

FENIX edition - 2 Modules PO60A01FX-0032 FENIX White Kos 0032 PO60A01FX-0030 FENIX White Alaska 0030 PO60A01FX-0720 FENIX Black Ingo 0720 PO60A01FX-0724 FENIX Grey Bromo 0724 PO60A01FX-0748 FENIX Beige Arizona 0748 PO60A01FX-0754 FENIX Blue Fes 0754


Metal edition - 2 Modules PO60A01MT-SH - Silver PO60A01MT-CH - Champagne PO60A01MT-GO - Gold PO60A01MT-BR - Bronze

Metal frames - 2 modules FOXXA01-60 - 1pc.

Plastic Frame for Drywall box FOXXD01-60

Metal Mounting Frame F0XXB01-60 - 2 points - 1pc. F0XXC01-60 - 3 points - 10pcs. F0XXB02-60 - 2 points - 1pc. F0XXC02-60 - 3 points - 10pcs.

How to order

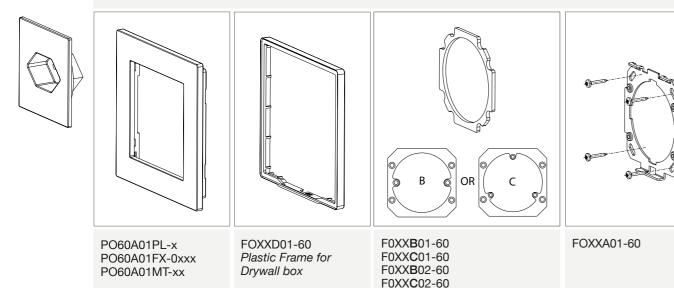

PO60A01PL-1 PO60A01PL-3 Plastica verniciata White Plastica verniciata Blacl

2 Modules Version

2 Modules Version



FENIX White Kos 0032

PO60A01FX-0032 PO60A01FX-0720 PO60A01FX-0724 PO60A01FX-0748 PO60A01FX-0754 PO60A01FX-0030 FENIX Black Ingo 0720 FENIX Grey Bromo 0724

2 Modules Version



Gold

Champagne

Frame 60MM **REGULAR VERSION**

Frame 60MM FENIX EDITION



FENIX Beige Arizona 0748



FENIX Blue Fes 0754



FFNIX White Alaska 0030

Frame 60MM METAL EDITION


OL-U Frame 45MM

2 MODULES

OL-U® 45 mm Series Frames can be installed on two-, three- and fourmodule boxes and are compatible with all major standards. Frames are available in Metal, FENIX® and painted plastic.

Socket compatibility:

- 4BOX
- AVE sistema 44 (only 2 modules)
- BTICINO LIVING LIGHT
- GEWISS (only 2 modules)
- VIMAR ARKE'
- VIMAR PLANA



Order Codes

Frame 45mm - 2 Modules

Regular version - 2 Modules

PO45A01PL-1 Painted plastic - white PO45A01PL-3 Painted plastic - black

FENIX edition - 2 Modules

PO45A01FX-0032 FENIX White Kos 0032 PO45A01FX-0030 FENIX White Alaska 0030 PO45A01FX-0720 FENIX Black Ingo 0720 PO45A01FX-0724 FENIX Grey Bromo 0724 PO45A01FX-0748 FENIX Beige Arizona 0748 PO45A01FX-0754 FENIX Blue Fes 0754

Metal edition - 2 Modules

PO45A01MT-SH - Silver PO45A01MT-CH - Champagne PO45A01MT-GO - Gold PO45A01MT-BR - Bronze

Metal frames - 2 modules FOXXA01-2M - 1pc. FOXXA02-2M - 10pcs.



2 Modules Version




PO45A01FX-0032 FENIX White Kos 0032

PO45A01FX-0720 PO45A01FX-0724 PO45A01FX-0748 PO45A01FX-0754 PO45A01FX-0030 FENIX Black Ingo 0720

FENIX Grey Bromo 0724


2 Modules Version

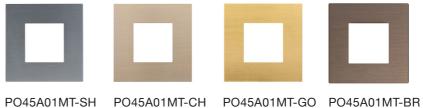

PO45A01MT-SH Champagne Gold

Bronze

How to order

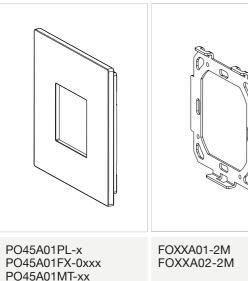

Frame 45MM **REGULAR VERSION**

Frame 45MM FENIX EDITION



FENIX Beige Arizona 0748



FENIX Blue Fes 0754



FENIX White Alaska 0030


Frame 45MM METAL EDITION

0

- 4BOX

- VIMAR ARKE'

- VIMAR PLANA

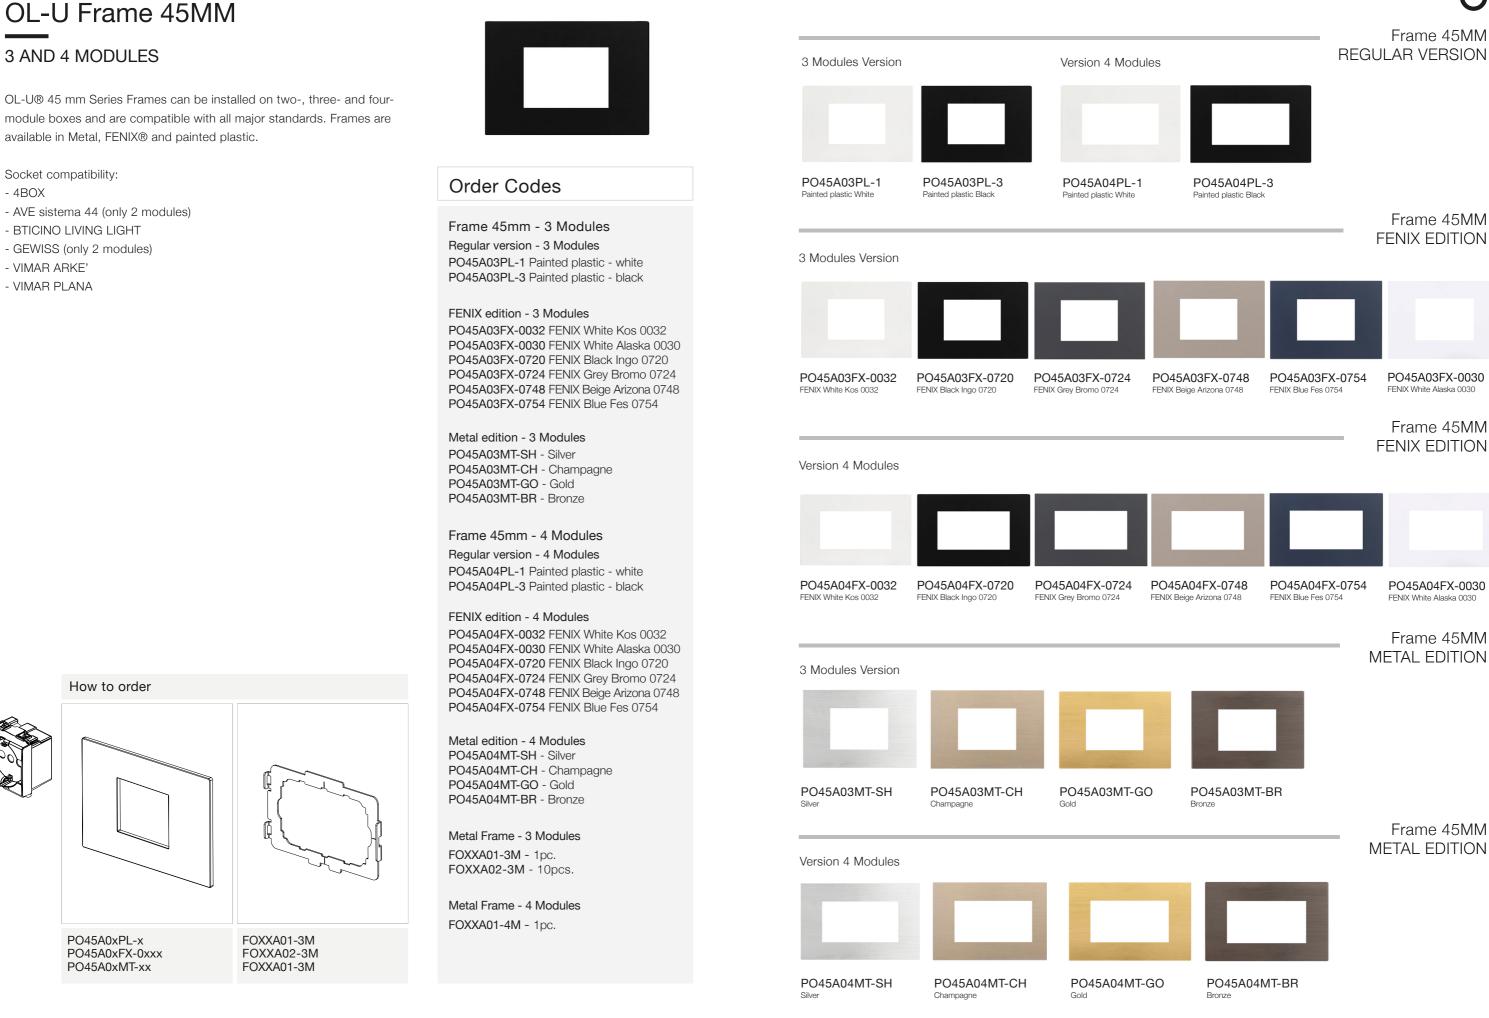

Frame 45MM **REGULAR VERSION**

FRAMESOCKETS

OL-U Metal mounting for Frame sokets

2, 3 AND 4 MODULES

Metal Mounting Frame for Sockets, available in 2, 3 and 4 modules.

Size 2 Modules: 77 x 79mm Size 3 Modules: 115,4 x 77mm Size 4 Modules: 141 x 77 mm



Order Codes

Metal Mounting Frame - 2 Modules FOXXA01-2M - 1 pc. FOXXA02-2M - 10 10pcs.

Metal Mounting Frame - 3 Modules FOXXA01-3M - 1 pc. FOXXA02-3M - 10 10pcs.

Metal Mounting Frame - 4 Modules FOXXA04-4M - 1 pc.



FOXXA01-2M Metal frame for Frame 2 Modules

FOXXA01-3M Metal frame for Frame 3 Modules

FOXXA04-4M Metal frame for Frame 4 Modules

KNX Capacitive Switch



The KNX® 9025 switch range consists of 4 - 8 - 10 channels capacitive buttons. Each button can be configured to manage on/off commands, dimming, shutters and venetians control, scene recall and control, objects sequences etc;

Device includes a 2 stage Room Temperature Controller with integrated PI to control heating and cooling equipments, valves, 2 and 4 pipes fan coils; etc. Device has an embedded temperature sensor and a rear 2 poles connector configurable as digital or analog input; It's possible to connect an additional NTC temperature probe (eelectron codes TS01A01ACC -TS01B01ACC - TS01D01ACC not included) to perform a direct temperature measurement.

9025 range has a RGB led bar on the front side in order to visualize feedbacks or other values available over the KNX bus (function available on the RGB range). Devices are available in 2 ranges: RGB LINE and RGB double glass; each range may have glasses in CUSTOM version. Using glasses in CUSTOM version is possible to light up custom and interchangeable icons matching with the associated function. The 9025 KNX® range is mounted in 2 module box and is compliant with main standards (British, German, Italian, etc). Device is equipped with KNX communication interface.


| Technical Features | |
|--|---|
| Mechanical data | • Dimensions: (W x H x D) 96 x 96 x 36 mm |
| Mounting | • British box, German box or Italian 2 modules box |
| Supply | Via ElB/KNX bus cable: 21 ÷ 32V DC Max 20 mA |
| Rear Input - digital mode | For free potential contacts (dry contacts) Max. length of Connecting Cables ≤ 10 m (twisted cable) |
| Rear input - analog mode for temperature probe | For NTC temperature probe eelectron code: • TS01A01ACC (range from -20°C to +100°C) • TS01B01ACC (range from -50°C to +60°C) • TS01D01ACC (range from -40°C to 125°C) • Max. length of Connecting Cable: ≤ 20 m (twisted cable) |











36.9

2 Modules Version



Order Codes

KNX Capacitive Switch Boards CS10A01KNX-1 KNX Capacitive switch - White CS10A01KNX-3 KNX Capacitive switch - Black

RGB Line Series Covers 9025GL04L01 Single glass 4 ch. - White 9025GL08L01 Single glass 8 ch. - White 9025GL10L01 Single glass 10 ch. - White 9025GL04L03 Single glass 4 ch. - Black 9025GL08L03 Single glass 8 ch. - Black

9025GL10L03 Single glass 10 ch. - Black

RGB Range Covers 9025GL04B01

Double Glass 4 channels - White 9025GL08B01

Double Glass 8 channels - White 9025GL10B01

Double Glass 10 channels - White

9025GL04B03 Double Glass 4 channels - Black

9025GL08B03 Double Glass 8 channels - Black 9025GL10B03 Double Glass 10 channels - Black

Line Series & RGB Range Covers -Custom 9025GL10D01 CUSTOM double glass - White

9025GL10D03 CUSTOM double glass - Black 9025GL10W01

CUSTOM single glass - White 9025GL10W03 CUSTOM single glass - Black

2 Modules Version





CS10A01KNX-1 Capacitive switch KNX - White

CS10A01KNX-3 Capacitive switch KNX - Black





9025GL04L01 Single glass 4 ch. - White







9025GL04L03 Single glass 4 ch. - Black

9025GL08L03 Single glass 8 ch. - Black





9025GL04B01 Double glass 4 ch. - White

9025GL08B01 Double glass 8 ch. - White





9025GL04B03 Double glass 4 ch. - Black

9025GL08B03 Double glass 8 ch. - Black





9025GL10D01 CUSTOM double glass - White

9025GL10D03 CUSTOM double glass - Black





KNX Capacitive Switch Boards

RGB Line Series Covers



9025GL10L01 Single glass 10 ch. - White



9025GL10L03 Single glass 10 ch. - Black

RGB Double Glass Range Covers



9025GL10B01 Double glass 10 ch. - White



9025GL10B03 Double glass 10 ch. - Black

Line Series & Double Glass Range Covers – CUSTOM



9025GL10W01 CUSTOM single glass - White



9025GL10W03 CUSTOM single glass - Black

CUSTOM version covers have to be associated with dedicated interchangeable icons sheets.

KNX Capacitive Switch





The KNX® 9025 switch range consists of 4 - 8 - 10 channels capacitive buttons. Each button can be configured to manage on/off commands, dimming, shutters and venetians control, scene recall and control, objects sequences etc;

Device includes a 2 stage Room Temperature Controller with integrated Pl to control heating and cooling equipments, valves, 2 and 4 pipes fan coils; etc. Device has an embedded temperature sensor and a rear 2 poles connector configurable as digital or analog input; It's possible to connect an additional NTC temperature probe (eelectron codes TS01A01ACC -TS01B01ACC - TS01D01ACC not included) to perform a direct temperature measurement.


9025 range has a RGB led bar on the front side in order to visualize feedbacks or other values available over the KNX bus (function available on the RGB range). Devices are available in 2 ranges: RGB LINE and RGB double glass; each range may have glasses in CUSTOM version. Using glasses in CUSTOM version is possible to light up custom and interchangeable icons matching with the associated function. The 9025 KNX® range is mounted in 3 module box and is compliant with main standards (British, German, Italian, etc). Device is equipped with KNX communication interface.

| Technical Features | |
|--|---|
| Mechanical data | • Dimensions: (W x H x D) 96 x 126 x 36 mm |
| Mounting | British box, German box or Italian 2/3 modules box |
| Supply | Via EIB/KNX bus cable: 21 ÷ 32V DC Max 20 mA |
| Rear Input - digital mode | For free potential contacts (dry contacts) Max. length of Connecting Cables ≤ 10 m (twisted cable) |
| Rear input - analog mode for temperature probe | For NTC temperature probe eelectron code: • TS01A01ACC (range from -20°C to +100°C) • TS01B01ACC (range from -50°C to +60°C) • TS01D01ACC (range from -40°C to 125°C) • Max. length of Connecting Cable: ≤ 20 m (twisted cable) |





3 Modules Version



Order Codes

KNX Capacitive Switch Boards CS10A01KNX-1-3M KNX Capacitive switch - 3 Modules -White

CS10A01KNX-3-3M KNX Capacitive switch - 3 Modules -Black

RGB Line Series Covers

9025GL304L01 Glass 4 channels - 3 Modules - White 9025GL308L01 Glass 8 channels - 3 Modules - White 9025GL310L01 Glass 10 channels - 3 Modules - White 9025GL304L03 Glass 4 channels - 3 Modules - Black 9025GL308L03 Glass 8 channels - 3 Modules - Black 9025GL310L03 Glass 10 channels - 3 Modules - Black

RGB Line Series Covers – Custom 9025GL310W01 Custom glass - 3 Modules - White 9025GL310W03 Custom glass - 3 Modules - Black

3 Modules Version



CS10A01KNX-1 - 3M

Capacitive switch KNX - White



CS10A01KNX-3 - 3M Capacitive switch KNX - Black





9025GL304L01 Glass 4 ch. - 3 Modules - White

9025GL308L01 Glass 8 ch. - 3 Modules - White





9025GL304L03 Glass 4 ch. - 3 Modules - Black

9025GL308L03 Glass 8 ch. - 3 Modules - Black



9025GL310D01 CUSTOM glass - 3 Modules White



9025GL310D03 CUSTOM glass - 3 Modules Black



KNX Capacitive Switch Boards

RGB Line Series Covers



9025GL310L01 Glass 10 ch. - 3 Modules - White



9025GL310L03 Glass 10 ch. - 3 Modules - Black

RGB Line Series Covers - CUSTOM



The 9025 thermostat is a KNX® room temperature controller that includes 7 Order Codes configurable capacitive buttons for on / off, dimming, rolling shutters and venetian controls, scene recall and control, object sequences, local thermostat controls, etc.

Device offers a 2 stage thermostat with integrated PI controller to control heating and cooling equipments, valves, 2 and 4 pipes fan coils etc ..

Device has an embedded temperature sensor and a rear 2 poles connector, configurable as digital or analog input; It's possible to connect an additional NTC temperature probe (eelectron codes TS01A01ACC - TS01B01ACC -TS01D01ACC not included) to perform a direct temperature measurement. A version with integrated temperature and relative humidity sensor is available usable for controlling actuators for ambient humidity control.

9025 range has a RGB led bar on the front side in order to visualize thermostat operating modes or feedbacks and other values available over the KNX bus. The device includes an RGB led bar on the front to display status or other values available on the KNX bus. Glass covers are available for HOTEL or RESIDENTIAL applications; both covers can be in CUSTOM version. Using glasses in CUSTOM version is possible to light up custom and interchangeable icons matching with the associated function.

The 9025 KNX® range is mounted in 2 module box and is compliant with main standards (British, German, Italian, etc).

Device is equipped with KNX communication interface.

Technical Features

| Mechanical data | • Dimensions: (W x H x D) 96 x 96 x 36 mm |
|--|---|
| Mounting | • British box, German box or Italian 2 modules box |
| Supply | Via EIB/KNX bus cable: 21 ÷ 32V DC Max 20 mA |
| Rear Input - digital mode | For free potential contacts (dry contacts) Max. length of Connecting Cables ≤ 10 m (twisted cable) |
| Rear input - analog mode for temperature probe | For NTC temperature probe eelectron code: • TS01A01ACC (range from -20°C to +100°C) • TS01B01ACC (range from -50°C to +60°C) • TS01D01ACC (range from -40°C to 125°C) • Max. length of Connecting Cable: ≤ 20 m (twisted cable) |

2 Modules Version



Order Codes

KNX Thermostat/Humidistat Boards RT07A01KNX-1

KNX Capacitive Thermostat - White

RH07A01KNX-1 KNX Capacitive Thermostat/Humidistat White

RT07A01KNX-3 KNX Capacitive Thermostat - Black

RH07A01KNX-3 KNX Capacitive Thermostat/Humidistat Black

Thermostat/Humidistat Covers

9025GT07L01-R Single glass - RESIDENTIAL display White

9025GT07L01-H Single glass - HOTEL display White

9025GT07L03-R Single glass - RESIDENTIAL display Black


9025GT07L03-H Single glass - HOTEL display Black

Custom version Cover 9025GT07W01-R CUSTOM single glass RESIDENTIAL White

9025GT07W03-R CUSTOM single glass RESIDENTIAL Black

9025GT07W01-H CUSTOM single glass HOTEL - White

9025GT07W03-H CUSTOM single glass HOTEL - Black

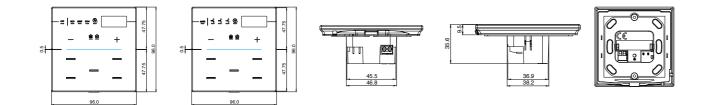

2 Modules Version









RH07A01KNX-1 KNX capacitive thermostat/humidistat White







9025GT07L01-H Single Glass HOTEL display - White

Single Glass

Black



9025GT07L01-R

RESIDENTIAL display - White

Single Glas



9025GT07W01-R Single CUSTOM Glass RESIDENTIAL display - White

9025GT07W03-R Single CUSTOM Glass RESIDENTIAL display - Black



9025GT07W01-H

Single CUSTOM Glas

HOTEL display - White

30272

9025GT07W03-H Single CUSTOM Gla HOTEL display - Black



White



KNX Capacitive Thermostat Boards



RT07A01KNX-3 KNX capacitive thermostat



RH07A01KNX-3 KNX capacitive thermostat/humidistat Black

Thermostat/Humidistat RGB Line Series Covers



9025GT07L03-R RESIDENTIAL display - Black



9025GT07L03-H Single Glass HOTEL display - White

Custom Version - Residential RGB Line Series

Custom Version — Hotel RGB Line Series

CAPACITIVESWITCHES

KNX Thermostat / Humidistat



The 9025 thermostat is a KNX® room temperature controller that includes 7 Order Codes configurable capacitive buttons for on / off, dimming, rolling shutters and venetian controls, scene recall and control, object sequences, local thermostat controls, etc.

Device offers a 2 stage thermostat with integrated PI controller to control heating and cooling equipments, valves, 2 and 4 pipes fan coils etc ...

Device has an embedded temperature sensor and a rear 2 poles connector, configurable as digital or analog input; It's possible to connect an additional NTC temperature probe (eelectron codes TS01A01ACC or TS01B01ACC not included) to perform a direct temperature measurement.


A version with integrated temperature and relative humidity sensor is available usable for controlling actuators for ambient humidity control.

9025 range has a RGB led bar on the front side in order to visualize thermostat operating modes or feedbacks and other values available over the KNX bus. The device includes an RGB led bar on the front to display status or other values available on the KNX bus. Glass covers are available for HOTEL or RESIDENTIAL applications; both covers can be in CUSTOM version. Using glasses in CUSTOM version is possible to light up custom and interchangeable icons matching with the associated function.

The 9025 KNX® range is mounted in 2 module box and is compliant with main standards (British, German, Italian, etc).

Device is equipped with KNX communication interface.

| Technical Features | | |
|--|---|--|
| Mechanical data | • Dimensions: (W x H x D) 96 x 96 x 36 mm | |
| Mounting | • British box, German box or Italian 2 modules box | |
| Supply | Via EIB/KNX bus cable: 21 ÷ 32V DC Max 20 mA | |
| Rear Input - digital mode | For free potential contacts (dry contacts) Max. length of Connecting Cables ≤ 10 m (twisted cable) | |
| Rear input - analog mode for temperature probe | For NTC temperature probe eelectron code: TS01A01ACC (range from -20°C to +100°C) TS01B01ACC (range from -50°C to +60°C) TS01D01ACC (range from -40°C to 125°C) Max. length of Connecting Cable: ≤ 20 m (twisted cable) | |



3 Modules Version



Order Codes

KNX Thermostat/Humidistat Boards RT07A01KNX-1-3M

KNX Capacitive Thermostat - 3 Modules White

RH07A01KNX-1-3M KNX Capacitive Thermostat/Humidistat 3 Modules - White

RT07A01KNX-3-3M KNX Capacitive Thermostat - 3 Modules Black

RH07A01KNX-3-3M KNX Capacitive Thermostat/Humidistat 3 Modules - Black

Thermostat/Humidistat RGB Line Series Covers

9025GT307L01-R Single glass RESIDENTIAL display - 3 Modules - White

9025GT307L01-H Single glass HOTEL display - 3 Modules

White 9025GT307L03-R Single glass RESIDENTIAL display - 3 Modules - Black

9025GT307L03-H Single glass HOTEL display - 3 Modules Black

Custom Version | RGB Line Series 9025GT307W01-R

CUSTOM single glass RESIDENTIAL - 3 Modules - White

9025GT307W03-R CUSTOM single glass RESIDENTIAL - 3 Modules - Black

9025GT307W01-H CUSTOM single glass HOTEL - 3 Modules White

9025GT307W03-H CUSTOM single glass HOTEL - 3 Modules Black

3 Modules Version





RT07A01KNX-1-3M KNX capacitive thermostat - White RH07A01KNX-1-3M

KNX capacitive thermostat/humidistat - White KNX capacitive thermostat - Black

9025GT307L01-R

9025GT307L01-H Single Glass HOTEL display - White





9025GT307L03-H

Single Glas

9025GT307L03-R Single Gla RESIDENTIAL display - Black

HOTEL display - Black



9025GT307W01-R CUSTOM Single Glass RESIDENTIAL display - White

9025GT307W03-R CUSTOM Single Glass RESIDENTIAL display - Black





9025GT307W01-H CUSTOM Single Glass HOTEL display - White





9025GT307W03-H

CUSTOM Single Glass

HOTEL display - Black



KNX Capacitive Thermostat Boards



RT07A01KNX-3-3M



RH07A01KNX-3-3M KNX capacitive thermostat/humidistat - Black

Thermostat/Humidistat RGB Line Series Covers

Custom Version - Residential | RGB Line Series

Custom Version — Hotel | RGB Line Series

KNX Thermostat / Humidistat



RT07A01KNX-1 KNX capacitive thermostat White



RT07A01KNX-3 KNX capacitive thermostat Black



9025GT07B01-R Double glass RESIDENTIAL display White



9025GT07B03-R Double glass RESIDENTIAL display Black



9025GT07D01-R CUSTOM double glass RESIDENTIAL display White



9025GT07D01-H CUSTOM double glass HOTEL display White



RH07A01KNX-1 KNX capacitive thermostat/humidistat White



RH07A01KNX-3 KNX capacitive thermostat/humidistat Black

Thermostat/Humidistat Covers



9025GT07B01-H Double glass HOTEL display White



9025GT07B03-H Double glass HOTEL display Black



9025GT07D03-R CUSTOM double glass RESIDENTIAL display Black



9025GT07D03-H CUSTOM double glass HOTEL display Black



2 Modules Version



Order Codes

Thermostat/Humidistat KNX RT07A01KNX-1 KNX Capacitive Thermostat - White

RH07A01KNX-1 KNX Capacitive Thermostat/Humidistat White

RT07A01KNX-3 KNX Capacitive Thermostat - Black

RH07A01KNX-3 KNX Capacitive Thermostat/Humidistat Black

Thermostat/Humidistat Covers 9025GT07B01R Double glass RESIDENTIAL display - White

9025GT07B01H Double glass HOTEL display - White

9025GT07B03R Double glass RESIDENTIAL display - Black


9025GT07B03H Double glass HOTEL display - Black


Custom Version Covers 9025GT07D01R CUSTOM Double glass RESIDENTIAL display - White

9025GT07D03R CUSTOM Double glass RESIDENTIAL display - Black

9025GT07D01H CUSTOM Double glass HOTEL display -White

9025GT07D03H CUSTOM Double glass HOTEL display -Black





Icons Sheet Sets

| 9025ISA-1 | 9025ISB-1 | 9025ISC-1 |
|---|---|---|
| icon sheet SET A White 32 icons | icon sheet SET B White 32 icons | icon sheet SET C White 32 icons |

* * * *

(*) *

*

* * • **

* * * * * * * * * * * * ir ir ir ir *** **(*) (*) (*)** 9025ISE-1 9025ISF-1 icon sheet icon sheet

32 icons

* * * * 1) SOS SOS 💽 (*)(*) TR (R) n n è è


9025ISH-1

icon sheet

32 icons

SET H | White

SET E | White SET F | White 32 icons




MODE 😥 🛋 🚍

SET A | Black SET B | Black 32 icons 32 icons

9025ISC-3 icon sheet SET C | Black 32 icons

9025ISD-3 icon sheet SET D | Black 32 icons





9025ISF-3 icon sheet SET F | Black


9025ISH-3 icon sheet SET H | Black

32 icons


icon sheet SET E | Black

32 icons













icon sheet SET D | White

32 icons



9025ISA-1 Icon sheet SET A - 32 icons - White 9025ISB-1 Icon sheet SET B - 32 icons - White 9025ISC-1 Icon sheet SET C - 32 icons - White 9025ISD-1 Icon sheet SET D - 32 icons - White 9025ISE-1 Icon sheet SET E - 32 icons - White 9025ISF-1 Icon sheet SET F - 32 icons - White 9025ISH-1 Icon sheet SET H - 32 icons - White 9025ISA-3 Icon sheet SET A - 32 icons - Black 9025ISB-3 Icon sheet SET B - 32 icons - Black 9025ISC-3 Icon sheet SET C - 32 icons - Black 9025ISD-3 Icon sheet SET D - 32 icons - Black 9025ISE-3 Icon sheet SET E - 32 icons - Black

9025ISF-3 Icon sheet SET F - 32 icons - Black

9025ISH-3 Icon sheet SET H - 32 icons - Black

9025 Multisensor Controller



HUMIDITY - TEMPERATURE

The environmental sensor HC06A01KNX is a device of the 9025 series, it is wall-mounted and finished with a white or black glass.

The HC06A01KNX device integrates humidity and temperature sensors. The device is also equipped with a 2-way connector on the rear side that can be configured as a digital or analogue input; in fact it is possible to connect an additional NTC probe to the device (eelectron code TS01A01ACC - TS01B01ACC - TS01D01ACC not included) to obtain a second temperature measurement.

The device includes 2 double-stage thermostats for controlling two distinct areas, both with an integrated PI controller for driving heating and cooling equipment, valves, 6-way valves, 2 and 4-pipe fan coils, etc ...

The humidity sensor manages the reading of the relative humidity in the environment and allows threshold control with hysteresis of humidification and dehumidification equipments.

The device embeds 6 capacitive keys for the management of on / off commands, dimmers, shutters and blinds, execution and learning of scenarios, object sequences, local thermostat controls, etc.

It includes a RGB LED on the front side for displaying states (temperature, humidity and CO2) or other quantities available on the KNX bus.





9025GH06 L01 Single glass line 6 ch. - White

9025GH06 L03 Single glass line 6 ch. - Black

| Technical Features | | |
|--|---|--|
| Mechanical data | • Dimensions: (W x H x D) 96 x 96 x 36 mm | |
| Mounting | British box, German box or Italian 2 modules box | |
| Supply | Via ElB/KNX bus cable: 21 ÷ 32V DC Max 15 mA | |
| Rear Input - digital mode | For free potential contacts (dry contacts) Max. length of Connecting Cables ≤ 10 m (twisted cable) Voltage Scanning 3,3V DC (internally generated) | |
| Rear input - analog mode for temperature probe | For NTC temperature probe eelectron code: • TS01A01ACC (range from -20°C to +100°C) • TS01B01ACC (range from -50°C to +60°C) • TS01D01ACC (range from -40°C to 125°C) • Max. length of Connecting Cable: ≤ 20 m (twisted cable) | |



Order Codes

KNX Capacitive Switch Boards HC06A01KNX-1 Humidity Sensor + Thermostat - Inwall -

No Display - White

HC06A01KNX-3 Humidity Sensor + Thermostat - Inwall -No Display - Black

RGB Range Covers 9025GH06L01 Single glass line 6 ch. - White

9025GH06L03 Single glass line 6 ch. - Black

9025 Multisensor Controller CO2 - HUMIDITY - TEMPERATURE

The environmental sensor MC06A01KNX is a device of the 9025 series, it is wall-mounted and finished with a white or black glass.

In the MC06A01KNX device there are 3 sensors available: temperature, humidity and CO₂, this measure is detected by using an integrated probe specially designed to detect CO₂ data directly and not through calculations based on other sensors.

The device is also equipped with a 2-way connector on the rear side that can be configured as a digital or analogue input; in fact it is possible to connect an additional NTC probe to the device (eelectron code TS01A01ACC - TS01B01ACC - TS01D01ACC not included) to obtain a second temperature measurement.

The device includes 2 double-stage thermostats for controlling two distinct areas, both with an integrated PI controller for driving heating and cooling equipment, valves, 6-way valves, 2 and 4-pipe fan coils, etc ...

The humidity sensor manages the reading of the relative humidity in the environment and allows threshold control with hysteresis of humidification and dehumidification equipments.

The device embeds 6 capacitive keys for the management of on / off commands, dimmers, shutters and blinds, execution and learning of scenarios, object sequences, local thermostat controls, etc.

It includes a RGB LED on the front side for displaying states (temperature, humidity and CO₂) or other quantities available on the KNX bus.





9025GM06L01 Single glass line 6 ch. - White

9025GM06L03 Single glass line 6 ch. - Black

Technical Features

| Mechanical data | • Dimensions: (W x H x D) 96 x 96 x 40 mm |
|--|---|
| Mounting | British box, German box or Italian 2 modules box |
| Supply | Via ElB/KNX bus cable: 21 ÷ 32V DC Max 15 mA |
| Rear Input - digital mode | For free potential contacts (dry contacts) Max. length of Connecting Cables ≤ 10 m (twisted) Voltage Scanning 3,3V DC (internally generated) |
| Rear input - analog mode for temperature probe | For NTC temperature probe eelectron code: • TS01A01ACC (range from -20°C to +100°C) • TS01B01ACC (range from -50°C to +60°C) • TS01D01ACC (range from -40°C to 125°C) • Max. length of Connecting Cable: ≤ 20 m (twisted of the section of the se |





Order Codes

KNX Capacitive Switch Boards MC06A01KNX-1

Multisensor CO_2 + Humidity + Temperature - Inwall - No Display - White

MC06A01KNX-3 Multisensor CO₂ + Humidity + Temperature - Inwall - No Display - Black

RGB Range Covers 9025GM06L01 Single glass line 6 ch. - White

9025GM06L03 Single glass line 6 ch. - Black



cable)

cable)





9025 Temperature Probe



The device TS01D01ACC of the 9025 series is a temperature probe connectible to KNX® devices.

The device is used in combination with the glass covers available in white (eelectron code 9025GS00A01) or black (eelectron code 9025GS00A03) variants;

The device is mounted in 2 or 3 module box and is compliant with main standards (British, German, Italian, etc).







TS01D01ACC-1 Temperature probe - White TS01D01ACC-3 Temperature probe - Black





TS01D01ACC-1-3M Temperature probe - 3 Modules - White TS01D01ACC-3-3M Temperature probe - 3 Modules - Black

| Technical Features | | Order Codes |
|--------------------------------|--|---|
| Mechanical data | • Dimensions: (W x H x D) 96 x 96 x 36 mm | TS01D01ACC-1 Temperature probe - Wh |
| Probe range | For NTC temperature probe eelectron code: TS01D01ACC (range from -40°C to 125°C) Max. length of Connecting Cable: ≤ 30 m (twisted cable) | TS01D01ACC-3 Temperature probe - Bla |
| | | TS01D01ACC-1-3M Temperature probe - 3 N |
| Environmental Specification | Operating temperature: -5 °C + 45 °C Storage temperature: - 20 °C + 55 °C | TS01D01ACC-3-3M Temperature probe - 3 N |
| | | 9025GS00A01 Single glass - White |
| | | 9025GS00A03 Single glass - Black |
| | | 9025GS300A01 |

Order Code

/hite

lack

Modules - White

Modules - Black

Single glass - 3 Modules - White

9025GS300A03 Single glass - 3 Modules - Black



Single glass - White



Single glass - Black

9025GS00A03





KNX Capacitive Switch Boards

Single Glass Covers



9025GS300A01 Single glass - 3 Modules - White



9025GS300A03 Single glass - 3 Modules - Black

DESIGNFRAMES

9025 Frames



Design frames and supports are available in 9025 glossy finish. A complement created to harmonize the aesthetics of electrical sockets and fruit holders as well. Available in PMMA and adapt with the most common European standard inwall boxes in 2, 3 and 4 modules formats.

*Compatible with 4Box[®], Vitrum Design[®], Biticino Living light[®], Vimar Plana[®], Vimar Arké[®] sockets.



Order Codes

AJ.19.L.02 Support For 2 Modules Cover Frame (Pack Of 10 pcs.)*

AJ.19.L.03 Support For 3 Modules Cover Frame (Pack Of 10 pcs.)*

AJ.19.L.04 Support For 4 Modules Cover Frame (Pack Of 10 pcs.)*

EEBP200790001-3 Design Frame - Black Lucid - 2 Modules -Pmma (Pack Of 10 pcs)*

EEBP200790000-1 Design Frame - White - 2 Modules - Pmma (Pack Of 10pcs)*

EEEP300790001-3 Design Frame - Black Lucid - 3 Modules -Pmma (Pack Of 10 pcs.)*

EEEP300790000-1 Design Frame - White - 3 Modules - Pmma (Pack Of 10 pcs)*

EEQP400790001-3 Design Frame - Black Lucid - 4 Modules -Pmma (Pack Of 10 pcs.)*

EEQP400790000-1 Design Frame - White - 4 Modules - Pmma (Pack Of 10 pcs)*



EEBP200790000-1 Design Frame - White - 2 Modules



Design Frame - Black Lucid - 2 Modules



EEEP300790001-3 Design Frame - Black Lucid - 3 Modules EEEP300790000-1 Design Frame - White - 3 Modules



EEQP400790001-3 Design Frame - Black Lucid - 4 Modules



DESIGNFRAMES





AJ.19.L.02 Support For 2 Modules Cover Frame



AJ.19.L.03 Support For 3 Modules Cover Frame



AJ.19.L.04 Support For 4 Modules Cover Frame


9025




BEDSIDE PANEL

9025 custom Bedside Panel includes the features of the Standard 9025 switch: consists of 2 – 4 – 8 – 10 channels capacitive buttons. Each button can be configured to manage on/off commands, dimming, shutters and venetians control, scene recall and control, objects sequences etc; device includes a 2 stage Room Temperature Controller with integrated PI to control heating and cooling equipments, valves, 2 and 4 pipes fan coils; etc. Device has an embedded temperature sensor and a rear 2 poles connector configurable as digital or analog input; It's possible to connect an additional NTC temperature probe (eelectron codes TS01A01ACC - TS01B01ACC -TS01D01ACC not included) to perform a direct temperature measurement.

The glass bedside panel, as in the CUSTOM version of the 9025 series, has the possibility of back lighting custom and interchangeable icons matching with the associated function. The product is intended to fulfill the request of the hotel market including high possibility of customization through dedicated icons set, two sockets (not included) and a minimal elegant design.

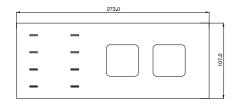





KNX Capacitive Switch Boards

Custom Bedside Panel Plate - 2 Sockets -

KNX Capacitive switch - White

KNX Capacitive switch - Black

Bedside Panel Plate 9025GL10C01-B2R

9025GL10C03-B2R

9025GL10C01-B2L

9025GL10C03-B2L

Order Codes

CS10A01KNX-1

CS10A01KNX-3

Right White

Right Black

Left White

Left Black





CS10A01KNX-1 Capacitive switch KNX - White CS10A01KNX-3 Capacitive switch KNX - Black





Right - Black

9025GL10C01-B2R Custom bedside panel plate - 2 sockets Right - White



9025GL10C01-B2L Custom bedside panel plate - 2 sockets -Left - White

1.1

9025GL10C03-B2L

Custom bedside panel plate - 2 sockets -Left - Black



KNX Capacitive Switch Boards



9025GL10C03-B2R Custom bedside panel plate - 2 sockets





9025 Access Control



DOOR PANEL

The KNX® 9025 capacitive doorpanel is a capacitive switch with RGB led bar; it is used in combination with the glass covers available in black or white; these cover glasses can be ordered in a specific version for the required application. The upper part of the glass can have a personalized, backlit room number; the lower part provides a key for the bell function, one for the 'do not disturb' function (DND) and one for the 'make up room' function (MUR). 2 other buttons customizable on request are available. Device includes a 2 stage Room Temperature Controller with integrated PI to control heating and cooling equipments, valves, 2 and 4 pipes fan coils; etc. Device has an embedded temperature sensor and a rear 2 poles connector configurable as digital or analog input; It's possible to connect an additional NTC temperature probe (eelectron codes TS01A01ACC - TS01B01ACC -TS01D01ACC not included) to perform a direct temperature measurement. Device has a RGB led bar on the front side in order to visualize feedbacks or other values available over the KNX bus (function available on the RGB range).

| Technical Features | | |
|--|---|--|
| Mechanical data | • Dimensions: (W x H x D) 96 x 96 x 36 mm | |
| Mounting | • British box, German box or Italian 2 modules box | |
| Supply | Via ElB/KNX bus cable: 21 ÷ 32V DC Max 20 mA | |
| Rear Input - digital mode | For free potential contacts (dry contacts) Max. length of Connecting Cables ≤ 10 m (twisted cable) | |
| Rear input - analog mode for temperature probe | For NTC temperature probe eelectron code: • TS01A01ACC (range from -20°C to +100°C) • TS01B01ACC (range from -50°C to +60°C) • TS01D01ACC (range from -40°C to 125°C) • Max. length of Connecting Cable: ≤ 20 m (twisted cable) | |



Order Codes

KNX Capacitive Switch Boards CS05B01KNX-1 KNX Capacitive switch - White

CS05B01KNX-3 KNX Capacitive switch - Black

Door Panel Covers 9025GL03P01 Door panel 2 ch. - White + RGB

9025GL03P03 Door panel 2 ch. - Black + RGB





CS05B01KNX-1 KNX Capacitive switch door panel - White

CS05B01KNX-3 KNX Capacitive switch door panel - Black





9025GL03P01 Door panel 2 ch. - Single glass - White + RGB DND/MUR + Bell

9025GL03P03 Door panel 2 ch. - Single glass - Black + RGB DND/MUR + Bell





KNX Capacitive Switch Boards

Door Panel RGB Line Covers

9025 Access Control

KNX TRANSPONDER READER

The 9025 series devices dedicated to access control management are KNX® devices and use RFID - MIFARE® technology. The range includes: TR00C02KNX: Doorpanel transponder reader, TH00C02KNX: Transponder holder, TE00C01KNX: Transponder card programmer

The products are intended to be installed with the glass covers which can be customized on request.

The upper part of the glass is backlit (to illuminate the room number or a logo - both customizations on request); in the lower part there are 3 freely configurable backlit capacitive buttons.

For TR00C02KNX: 1 button (typically with bell function) and 2 LEDs for displaying the MUR and DND states.

The transponder is read by placing it in front of the reader, at a maximum distance of 30 mm. The color of the reader RGB LED bar indicates that the card has been recognized and shows different (configurable) colors for status or anomalies reporting, such as:

- Card recognized (welcome): default color Green
- Incorrect system code: color default Orange
- Unrecognized ID card: default color Red

Mounting

Supply

- Wrong Card Date (validity expired): default color Yellow
- Wrong time of day (Entry forbidden time): default color Magenta
- Wrong day of the week (Entry prohibited day): default color Blue-Cyan

The reader also integrates a buzzer (which can be activated with the ETS parameter) for anomalies signaling.

The 9025 KNX® range is mounted in 2 modules box and is compliant with main standards (British, German, Italian, etc). Device is equipped with KNX communication interface.



Order Codes

Black

KNX Transponder Reader TR00C02KNX-1 Transponder Reader with 3 control buttons

White TR00C02KNX-3 Transponder Reader with 3 control buttons

Transponder Reader RGB Line Series Covers

9025PTR03L01 Single plexiglass - White

9025PTR03L03 Single plexiglass - Black

9025GTR03L01 Single glass - White

9025GTR03L03 Single glass - Black



TR00C02KNX-1 Transponder Reader with 3 control buttons - White

TR00C02KNX-3 Transponder Reader with 3 control buttons - Black




9025PTR03L01

Single plexiglass - White




9025PTR03L03 Single plexiglass - Black

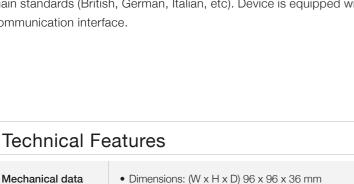

• British box, German box or Italian 2 modules box

• Via EIB/KNX bus cable: 21 ÷ 32V DC, max 10 mA

• Auxiliary supply: 12 ÷ 24V DC / AC, max 20 mA









2 Modules Version



KNX Transponder Reader

Transponder Reader Covers | RGB Line Series



9025GTR03L01 Single glass - White



9025GTR03L03 Single glass - Black

9025 Access Control

KNX OUTDOOR TRANSPONDER READER

The protection level is IP54 rated:

- Protected from water spray from any direction
- Protected from limited dust ingress

The products is intended to be installed with the glass covers which can be customized on request. The upper part of the glass is backlit (to illuminate the room number or a logo – both customizations on request); in the lower part there's 1 button (typically with bell function) and 2 LEDs for displaying the MUR and DND states.

The transponder is read by placing it in front of the reader, at a maximum distance of 30 mm.

The color of the reader RGB LED bar indicates that the card has been recognized and shows different (configurable) colors for status or anomalies reporting such as:

- Card recognized (welcome): default color Green
- Incorrect system code: Orange color default
- Unrecognized ID card: default color Red
- Wrong Card Date (validity expired): default color Red
- Wrong day of the week (Entry prohibited day): default color Purple
- Wrong time of day (Entry forbidden time): default color Purple

The reader also integrates a buzzer (which can be activated with the ETS parameter) for anomalies signaling.



Order Codes

OUTRC02KNX KNX Outdoor Transponder Reader - Black

OUTMC02ACC RFID accessory for outdoor mounting IP54

9025GTR03L03 Single glass - Black



OUTRC02KNX Transponder reader, 3 buttons Black



9025GTR03L03 Single glass - Black

| Technical Features | | |
|--------------------|--|--|
| Mechanical data | • Dimensions: (W x H x D): 96 x 96 x 36 mm | |
| Mounting | British, German or Italian Box of 2 modules | |
| Supply | Via EIB/KNX bus cable: 21 ÷ 32V DC, max 10 mA Auxiliary supply: 12 ÷ 24V DC / AC, max 20 mA | |



OUTMC01ACC Accessory for outdoor mounting Black



KNX Transponder Reader

Transponder Cover RGB Line

Accessory for outdoor reader

9025 Access Control

KNX TRANSPONDER READER

The 9025 series devices dedicated to access control management are KNX® devices and use RFID - MIFARE® technology. The range includes: TR00C02KNX: Doorpanel transponder reader, TH00C02KNX: Transponder holder, TE00C01KNX: Transponder card programmer

The products are intended to be installed with the glass covers which can be customized on request.

The upper part of the glass is backlit (to illuminate the room number or a logo - both customizations on request); in the lower part there are 3 freely configurable backlit capacitive buttons.

For TR00C02KNX: 1 button (typically with bell function) and 2 LEDs for displaying the MUR and DND states.

The transponder is read by placing it in front of the reader, at a maximum distance of 30 mm. The color of the reader RGB LED bar indicates that the card has been recognized and shows different (configurable) colors for status or anomalies reporting, such as:

- Card recognized (welcome): default color Green
- Incorrect system code: color default Orange
- Unrecognized ID card: default color Red

Technical Features

Mechanical data

Rear Input - digital

Mounting

Supply

mode

Rear input -

analog mode for

temperature probe

- Wrong Card Date (validity expired): default color Yellow
- Wrong time of day (Entry forbidden time): default color Magenta
- Wrong day of the week (Entry prohibited day): default color Blue-Cyan

The reader also integrates a buzzer (which can be activated with the ETS parameter) for anomalies signaling.

The 9025 KNX® range is mounted in 3 modules box and is compliant with main standards (British, German, Italian, etc). Device is equipped with KNX communication interface.

• Dimensions: (W x H x D) 126 x 96 x 36 mm

• British box, German box or Italian 2 or 3 modules box

• Max. length of Connecting Cables ≤ 10 m (twisted cable)

• Max. length of Connecting Cable: \leq 30 m (twisted cable)

• Via EIB/KNX bus cable: 21 ÷ 32V DC, max 10 mA

• Auxiliary supply: 12 ÷ 24V DC / AC, max 20 mA

• For free potential contacts (dry contacts)

For NTC temperature probe eelectron code: • TS01A01ACC (range from -20°C to +100°C)

• TS01B01ACC (range from -50°C to +60°C)

• TS01D01ACC (range from -40°C to 125°C)

3 Modules Version

KNX SECURE



Order Codes

KNX Transponder Reader TR00C02KNX-1-3M Transponder Reader with 3 control buttons 3 Modules - White

TR00C02KNX-3-3M Transponder Reader with 3 control buttons 3 Modules - Black

Transponder Reader RGB Line Series Covers

9025PTR303L01 Single plexiglass - 3 Modules - White

9025PTR303L03 Single plexiglass - 3 Modules - Black

9025GTR303L01 Single glass - 3 Modules - White

9025GTR303L03 Single glass - 3 Modules - Black

۳

口))

3 Modules Version





TR00C02KNX-1-3M Transponder Reader with 3 control buttons 3 Modules - White

TR00C02KNX-3-3M Transponder Reader with 3 control . buttons 3 Modules - Black





9025PTR303L01 Single plexiglass - 3 Modules - White 9025PTR303L03 Single plexiglass - 3 Modules - Black

HOSPITALITY



KNX Transponder Reader

Transponder Reader Covers | RGB Line Series



9025GTR303L01 Single glass - 3 Modules - White



9025GTR303L03 Single glass - 3 Modules - Black

9025 Access Control

KNX TRANSPONDER HOLDER

The 9025 series devices dedicated to access control management are KNX® devices and use RFID - MIFARE® technology. The range includes: TR00C02KNX: Doorpanel transponder reader, TH00C02KNX: Transponder holder, TE00C01KNX: Transponder card programmer.

The products are intended to be installed with the glass covers which can be customized on request.

The upper part of the glass is backlit (to illuminate the room number or a logo - both customizations on request); in the lower part there are 3 freely configurable backlit capacitive buttons.

For TR00C02KNX: 1 button (typically with bell function) and 2 LEDs for displaying the MUR and DND states

For TH00C02KNX: 1 button (typically with CAMERA LIGHTS function) and 2 buttons for setting MUR and DND

The transponder is read by placing it in front of the reader, at a maximum distance of 20 mm; in the case of the transponder pocket, the card is inserted into a compartment from the top of the device. The color of the reader RGB LED bar indicates that the card has been recognized and shows different (configurable) colors for status or anomalies reporting. The reader also integrates a buzzer (which can be activated with the ETS parameter) for anomalies signaling. Device is equipped with KNX communication interface.

Technical Features

 \bigcirc

☀

| rechinical realules | | |
|---------------------|--|--|
| Mechanical data | • Dimensions: (W x H x D) 96 x 96 x 41,6 mm | |
| Mounting | British box, German box or Italian 2 modules box | |
| Supply | Via EIB/KNX bus cable: 21 ÷ 32V DC, max 10 mA Auxiliary supply: 12 ÷ 24V DC / AC, max 20 mA | |

2 Modules Version



Order Codes

KNX Transponder Holder

TH00C02KNX-1 Transponder Holder with 3 control buttons White

TH00C02KNX-3

Transponder Holder with 3 control buttons Black

Transponder Holder RGB Line Series Covers 9025PTH03L01 Single plexiglass - White

9025PTH03L03 Single plexiglass - Black

9025GTH03L01 Single glass - White

9025GTH03L03 Single glass - Black

2 Modules Version



TH00C02KNX-1 Transponder Holder with 3 control buttons - White



THOOCO2KNX-3 Transponder Holder with 3 control buttons - Black





9025PTH03L03 Single plexiglass - Black

9025PTH03L01 Single plexiglass - White



KNX Transponder Holder

Transponder Holder Covers | RGB Line Series



9025GTH03L01 Single glass - White



9025GTH03L03 Single glass - Black

9025 Access Control

KNX TRANSPONDER HOLDER

The 9025 series devices dedicated to access control management are KNX® devices and use RFID - MIFARE® technology. The range includes: TR00C02KNX: Doorpanel transponder reader, TH00C02KNX: Transponder holder, TE00C01KNX: Transponder card programmer.

The products are intended to be installed with the glass covers which can be customized on request.

The upper part of the glass is backlit (to illuminate the room number or a logo - both customizations on request); in the lower part there are 3 freely configurable backlit capacitive buttons.

For TR00C02KNX: 1 button (typically with bell function) and 2 LEDs for displaying the MUR and DND states

For TH00C02KNX: 1 button (typically with CAMERA LIGHTS function) and 2 buttons for setting MUR and DND

The transponder is rea distance of 20 mm; in inserted into a compa reader RGB LED bar in different (configurable) colors for status or anomalies reporting. The reader also integrates a buzzer (which can be activated with the ETS parameter) for anomalies signaling. Device is equipped with KNX communication interface.

| | ead by placing it in front of the reader, at a maximum |
|----------|--|
| Transp | in the case of the transponder pocket, the card is |
| Series | artment from the top of the device. The color of the |
| 9025P1 | ndicates that the card has been recognized and shows |
| Single p |) colors for status or anomalias reporting. The reader |

9025PTR303L03

9025GTR303L01

Single glass - 3 Modules - Black



TH00C02KNX-1-3M Transponder Holder with 3 control buttons 3 Modules - White

TH00C02KNX-3-3M Transponder Holder with 3 control buttons 3 Modules - Black





9025PTH303L01 Single plexiglass - 3 Modules - White

9025PTH303L03 Single plexiglass - 3 Modules - Black



3 Modules Version

Order Codes

Transponder Holder TH00C02KNX-1-3M Transponder Holder with 3 control buttons 3 Modules - White

TH00C02KNX-3-3M Transponder Holder with 3 control buttons 3 Modules - Black

ponder Holder RGB Line s Covers


TR303L01 plexiglass - 3 Modules - White

Single plexiglass - 3 Modules - Black

Single glass - 3 Modules - White

9025GTR303L03

Technical Features Mechanical data • Dimensions: (W x H x D) 126 x 96 x 36 mm • British box, German box or Italian 2 or 3 modules box Mounting Supply • Via EIB/KNX bus cable: 21 ÷ 32V DC, max 10 mA • Auxiliary supply: 12 ÷ 24V DC / AC, max 20 mA

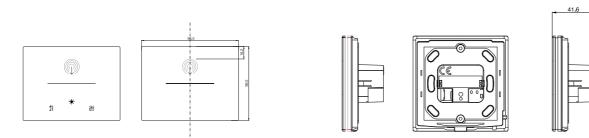





KNX Transponder Holder

Transponder Holder Covers | RGB Line Series



9025GTH303L01 Single glass - 3 Modules - White



9025GTH303L03 Single glass - 3 Modules - Black

9025 Access Control





The 9025 KNX® numeric keypad dedicated to access control management consists of 10-channel capacitive buttons. The product can be installed with glass covers, white or black, which show the numbers from 0 to 9 which can be backlit. Device includes a 2 stage Room Temperature Controller with integrated PI to control heating and cooling equipments, valves, 2 and 4 pipes fan coils; etc.. Device has an embedded temperature sensor and a rear 2 poles connector configurable as digital or analog input; It's possible to connect an additional NTC temperature probe (eelectron codes TS01A01ACC or TS01B01ACC - not included) to perform a direct temperature measurement. The device includes an RGB LED bar on the front side of the numeric keypad in order to visualize the recognition of the entered code and shows different colors (configurable) for status or anomalies reporting such as:

- Password recognized (welcome): default Green color
- Incorrect system code: default color Orange

Technical Features

Mechanical data

Rear Input - digital

Mounting

Supply

mode

Rear input -

analog mode for temperature probe

- Password not recognized: default color Red
- Incorrect Date Password (validity expired): default color Yellow
- Wrong time of day (Entry prohibited time): default color Magenta
- Wrong day of the week (Entry prohibited day): default color Blue-Cyan

The numeric keypad also integrates a buzzer that can be enabled or disabled in order to give acoustic feedback when a key is pressed. The 9025 KNX® numeric keypad is mounted in 2 or 3 modules box and is compliant with main standards (British, German, Italian, etc). Device is equipped with KNX communication interface.

• Dimensions (2 modules): (W x H x D): 96 x 96 x 36 mm

• Dimensions (3 modules): (W x H x D): 126 x 96 x 36 mm

• British box, German box or Italian 2 or 3 modules box

• Max. length of Connecting Cables ≤ 10 m (twisted cable)

• Max. length of Connecting Cable: \leq 30 m (twisted cable)

• Voltage Scanning: 3,3 V DC (internally generated)

• Via EIB/KNX bus cable: 21 ÷ 32V DC

• For free potential contacts (dry contacts)


For NTC temperature probe eelectron code:

• TS01A01ACC (range from -20°C to +100°C)


• TS01B01ACC (range from -50°C to +60°C)


• TS01D01ACC (range from -40°C to 125°C)


- max 20 mA



KNX







Order Codes

KP10C02KNX-1 KNX capacitive numeric keypad for access control - White

KP10C02KNX-3 KNX capacitive numeric keypad for access control - Black

KP10C02KNX-1-3M KNX capacitive numeric keypad for access control 3 Modules - White

KP10C02KNX-3-3M KNX capacitive numeric keypad for access control - 3 Modules - Black

9025GKP10L1 Single Glass Cover - White

9025GKP10L3 Single Glass Cover - Black

9025GKP310L1 Single Glass Cover - 3 Modules - White

9025GKP310L3 Single Glass Cover - 3 Modules - Black





KP10C02KNX-1 KNX capacitive numeric keypad for access control - White



KP10C02KNX-1-3M KNX capacitive numeric keypad for access control 3 modules - White







9025GKP10L1

Single Glass Cover - White



9025GKP10L3 Single Glass Cover - Black



KNX Capacitive Switch Boards

KP10C01KNX-3 KNX capacitive numeric keypad for access control - Black



KP10C01KNX-3-3M KNX capacitive numeric keypad for access control - 3 modules - Black

Numeric Keypad Covers | RGB Line Series



9025GKP310L1 Single Glass Cover - 3 Modules - White



9025GKP310L3 Single Glass Cover - 3 Modules - Black

9025 Access Control



KNX OUTDOOR NUMERIC KEYPAD

The 9025 KNX numeric keypad dedicated to access control management consists of 10-channel capacitive buttons.

The protection level is IP54 rated:

- Protected from water spray from any direction
- Protected from limited dust ingress

The product is installed with black glass covers, which show the numbers from 0 to 9 which can be backlit.

Device includes a 2 stage Room Temperature Controller with integrated PI to control heating and cooling equipments, valves, 2 and 4 pipes fan coils; etc..

Device has an embedded temperature sensor and a rear 2 poles connector configurable as digital or analog input; It's possible to connect an additional NTC temperature probe (eelectron codes TS01A01ACC or TS01B01ACC – not included) to perform a direct temperature measurement.

The device includes an RGB LED bar on the front side of the numeric keypad in order to visualize the recognition of the entered code and shows different colors (configurable) for status or anomalies reporting.

The outdoor numeric keypad also integrates a buzzer that can be enabled or disabled in order to give acoustic feedback when a key is pressed. The 9025 KNX® numeric keypad is mounted in 2 module boxes and is compliant with the main standards (British, German, Italian, etc).

| 4 | 5 |
|---|---|
| | |
| | 0 |

KNX

Order Codes

OUTKC02KNX KNX capacitive numeric keypad outdoor Black

OUTMC01ACC Outdoor mounting accessory IP54

9025GKP10L3 Single glass - Black



OUTKC02KNX KNX capacitive numeric keypad outdoor Black



9025GKP10L3 Single glass - Black

| Technical Features | | |
|--|--|--|
| Mechanical data | • Dimensions (2 modules) ver.(W x H x D): 96 x 96 x 36 mm | |
| Mounting | British, German or Italian 2-module box | |
| Supply | Via EIB/KNX bus cable 21 ÷ 32V DC Max 20 mA | |
| Rear Input - digital mode | For free potential contacts (dry contacts) Max. length of Connecting Cables: ≤ 10 m (twisted cable) Voltage Scanning: 3,3 V DC | |
| Rear input - analog mode for temperature probe | For NTC temperature probe eelectron code TS01A01ACC (range from -20°C to +100°C) TS01B01ACC (range from -50°C to +60°C) TS01D01ACC (range from -50°C to +60°C) Max. length of Connecting Cable: ≤ 30 m (twisted cable) | |



OUTMC01ACC Outdoor installation accessory Black



KNX capacitive numeric keypad

RGB Line numeric keypad cover

Accessory for outdoor numeric keypad

Transponder Reader



The Synchronicity series devices dedicated to access control management are KNX devices and use RFID - MIFARE® technology.

The transponder is read by placing it in front of the reader, at a maximum distance of 20 mm; in the case of the transponder pocket, the card is inserted into a compartment from the top of the device.

The Synchronicity KNX range is mounted in 2 or 3 modules box and is compliant with main standards (British, German, Italian, etc).

Device is equipped with KNX communication interface.

The AC22D01KNX-3 external card reader is an EIB/KNX device dedicated to access control.







Order Codes

Transponder reader 13.5MHz - White

TR22D01KNX-3 Transponder reader 13.5MHz - Black

AC22D01KNX-3 Outdoor transponder reader 13.5MHz, 2IN/2OUT - Black

PX10A24ACC Plexi plate for Outdoor reader - White

PX15A14ACC Plexi plate for Outdoor reader - Black

Transponder Holder



The Synchronicity series devices dedicated to access control management are KNX devices and use RFID - MIFARE® technology. The products are intended to be installed with the plexiglass covers which can be customized on request.

The transponder is read by placing it in front of the reader, at a maximum distance of 20 mm; in the case of the transponder pocket, the card is inserted into a compartment from the top of the device.

The Synchronicity KNX range is mounted in 2 or 3 modules box and is compliant with main standards (British, German, Italian, etc).

Device is equipped with KNX communication interface.

Technical Features

| Mechanical data | • Dimensions: (W x H x D) 110 x 78 x 16 mm |
|------------------------------|---|
| Mounting | British box, German box or Italian 2/3 modules b |
| Supply | Via ElB/KNX bus cable: 21 ÷ 32V DC Supplementary 112 ÷ 24 V AC / DC +/-10% |
| Rear Input - digital mode | For free potential contacts (dry contacts) Max. length of Connecting Cables ≤ 10 m (twisted) |
| Output rate | • Max load 24V DC / AC, 2 A |







Order Codes

box

TH22D01KNX-1 Transponder holder 13.5Mhz - White

TH22D01KNX-3 Transponder holder 13.5Mhz - Black

ed cable)



GRMS

eSuite Software



eSuite software is dedicated for hotel management, for the supervision of KNX environments, access control and alarms. The software can be interfaced with BMS. Client remote management can be done via Internet or Ethernet. The package is available with Embedded PC including 2 clients.

eSuite Staff Experience for Staff daily operations

Technical Features

- Number of pages according to installed license.
- Number of clients according to installed license
- Up to 10 profiling groups
- Unlimited users
- Advanced ETS project data import
- Interfaced to third parties PMS
- Timer management
- Alarms management







Hotel Backoffice Applications Connectivity

Order Codes

SW01F11ACS

Embedded pc with eSuite sw - full package - 0 clients closed license - 10 Rooms

SW01F01ACS

Embedded pc with eSuite sw - full package - 2 clients start up license

SW01F10ACS

Embedded pc with eSuite sw - license - cost per single room

SW07D05KNX

Embedded rack pc with eSuite sw - full package - 2 clients - start up license

SW00D04KNX

eSuite interface to management system

SW00D04DVL

eSuite connectivity to PMS custom development

SW00D06KNX


eSuite connectivity to Horizone & Virtual Badge applications

SW00T05KNX

eSuite IP (tunneling) module/unit price per IP node

SW01F01LIC

eSuite license virtual BLE access - 1 room/area - 1 year max 5 guests SW01F02LIC License eSuite virtual BLE access - 1 room/area - 1 month - max 5 guests SW01F03LIC eSuite license virtual BLE access - 1 room/area - 3 years max 5 guests

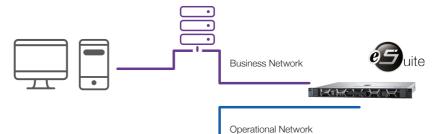

- Property Management Systems
- E-Lock Servers or in room applications
- Other IP related services





| 5 B Sales Rectance + | | No. 10 | -0 | -0 | | | | | |
|-------------------------------------|----------|---------------|-----------|---------|----------|----------|---------|------------|----------|
| | HARP | 9 1187 | O 28.80 C | 28.81.0 | 34,3117 | 1000 | HAP | BAP | HEC |
| | | | Room 112 | | Read Tol | - Q | - Q | | |
| | -100 | 14.01 | O MEC | Note: | 14,10 P | | - 1000 | 1432.0 | MNP |
| | | -0 | | | Res 10 | Rest (M | Ram 125 | Read Ville | |
| 2 Russ111 3 Russ114 3 Russ114 | 14.812 | 21.001 | DARC . | 34,501* | 34.001* | 26,39-5" | 26.31 0 | 2632.07 | 34,30.0" |
| | Harr 101 | Access (2) | Rom 10 | | | | | | |
| | _ | _ | - | _ | _ | _ | | | - |
| | | | | | | | | | |
| | | | | | | | | | |

KNX (OPEN STANDARD)



9025 Access Control

KNX TRANSPONDER ENCODER

It is a USB desktop device compatible with USB-HID specification.

It is a device designed to program cards or RFID devices used for Eelectron access control.

No drivers are required to use this device with the dedicated software module.

It's powered by the PC USB port to which is connected.



Order Codes

TE00C01USB Transponder Encoder USB - Black

MIFARE Accessories

TRANSPONDER CARD MIFARE 1K

The card CD00M01TRC is based on MIFARE 1K Classic technology,

TRANSPONDER FITBAND MIFARE 1K


CD00M04TRB is a wristband, in polyurethane, with a unique and modern design.

Comfortable, water resistant and easy to wear, the case of this product can be customized with silkscreen colour printing, and epoxy. Ideal for access control in recreational clubs, amusement parks, spa and swimming pools, it is available in black, blue, pink and yellow.

TRANSPONDER KEYHOLDER MIFARE 1K

The keyholder CD00M02TRK is based on MIFARE 1K Classic technology.

| Technical Features | | |
|--------------------|--|--|
| Mechanical data | Case: plastic (PC-ABS) / Aluminum Dimensions: (W x H x D): 96 x 98 x 100 mm Weight: ca. 320 g. | |
| Power Supply | Via bus USB: 5 V DC Current Consumption: max 160 mA @ 5 V | |

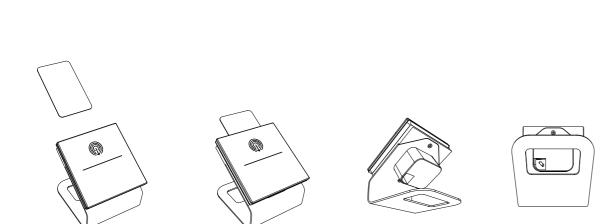

| Technical Fea | atures | Order Codes | |
|-----------------------|--|---|--|
| RFID Features Chip | Frequency: 13.56 MHz IC type: MIFARE 1K Classic EV1 (Type 4) Memory size: 1024 Byte UID: 4 o 7 Byte Standard protocol: ISO 14443A Reading distance: Up to 5 cm (dep. upon the reader) | CD00M02TRC Transponder Card MIFARE 1K - 50 pcs. White CD00M03TRC Transponder Card MIFARE 1K - 200 pcs. White CD00M02TRK Transponder Keyholder MIFARE 1K 50 pcs. CD00M04TRB Transponder Wearable (bracelet) MIFARE 1K - 50 pcs. CD00Q02TRC Transponder Combo Card - MIFARE 1K 125 KHz - 50 pcs White CD00Q03TRC Transponder Combo Card - MIFARE 1K 125 KHz - 200 pcs White CD00A02TRC Transponder Combo Card - MIFARE 1K 125 KHz - 200 pcs White | |
| Mechanical data | Card • Dimensions: (mm): 86x54 • Material: PVC Fitband • Size (mm): 205x15 ø 55 • Weight (g): 19 • Material housing: Polyurethane Keyholder • Size (mm): 40.5x32x4.2 • Weight (g): 6 • Material housing: ABS • Attachment: Key ring | | |
| Customization: | Card Printing: silkscreen color print, digital print, offset print, thermal printing Colour: white Fitband Printing: silkscreen color print, and epoxy Colour: black, blue, pink, yellow Keyholder Printing: epoxy, silkscreen color print Colour: blue, black, green, grey, yellow, red, white | White CD00A03TRC Transponder Card - 125 KHz - 200 pcs. White CD00B02KNX Transponder Card - 125 KHz - 50 pcs. | |













4 CHANNELS + THERMOSTAT

SB40AxxKNX is a KNX tactile 4 channels push button which can be configured to manage on/off commands, dimming, shutters and venetians control, scene recall and control, sequences of 3 objects, etc. Device includes a 2 stage Room Temperature Controller with integrated PI to control heating and cooling equipments, valves, 2 and 4 pipes fan coils, etc. Device has a rear connector (2 poles) configurable as digital or analog input. It's possible to connect a NTC temperature probe (eelectron codes TS01A01ACC - TS01B01ACC - TS01D01ACC not included) to have a direct temperature measurement. SB40AxxKNX has a RGB led bar on the front side in order to visualize feedbacks or other values available over the KNX bus. SB40AxxKNX is intended to be used in British box, German box or Italian 2 modules box. Device is equipped with KNX communication interface.

| Technical Features | | |
|--|---|--|
| Mechanical data | • Dimensions: (H x W x D) : 55 x 55 x 37 mm | |
| Mounting | • British box, German box or Italian 2 modules box | |
| Supply | Via ElB/KNX bus cable: 21 ÷ 32V DC Max 10 mA | |
| Rear Input - digital mode | For free potential contacts (dry contacts) Max. length of Connecting Cables ≤ 10 m (twisted cable) | |
| Rear input - analog mode for temperature probe | For NTC temperature probe eelectron code: • TS01A01ACC (range from -20°C to +100°C) • TS01B01ACC (range from -50°C to +60°C) • TS01D01ACC (range from -40°C to 125°C) • Max. length of Connecting Cable: ≤ 20 m (twisted cable) | |

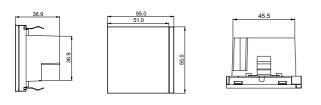



Order Codes

SB40A01KNXPLCR Knx switch 4 channels + Thermostat 55x55mm - Chromo - Plastic

SB40A11KNXPLBL Knx switch 4 channels + Thermostat 55x55mm - Black - Plastic

SB40A21KNXPLWH Knx switch 4 channels + Thermostat 55x55mm - White - Plastic


SB40A09KNXPLCR Knx switch 4 channels + Thermostat 55x55mm - Chromo - Plastic + Linemark

SB40A19KNXPLBL Knx switch 4 channels + Thermostat 55x55mm - Black - Plastic + Linemark

SB40A29KNXPLWH Knx switch 4 channels + Thermostat 55x55mm - White - Plastic + Linemark

SB40A01KNXMT60 Knx switch 4 channels + Thermostat 55x55mm - Chromo + Alluminium

(Order codes are referred only to switches without frames).

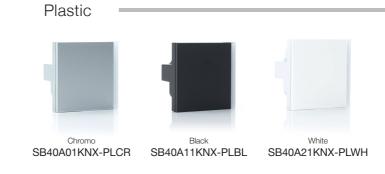

Plastic + Linemark













TOUCHPANEL

9025 KNX Touch Panel 3,5"



EVO21

The touch panel is equipped with a 3,5 inches coloured display; dimming, status, values, lighting, shutters and timers are controlled and password protected when needed. Using the embedded temperature sensor and the embedded room temperature controller function is possible to manage valves, fancoil or other HVAC equipments. The device includes a number of pre-programmed logic including control of electrical loads with automatic power-off priority, (this feature is available in combination with eelectron KNX power measuring device). The panel 3.5 "Touch has an LED for status display and a buzzer to give sound signals with alarm function.

The device is equipped with a Micro-USB connection accessible from the front by simply removing the external cover; allows connection to the programming device for customizing icons, screensavers or logics. Similarly, a Micro-SD Card slot is available for updating the device's firmware. Available in two colours (white and black) is based on Linux OS but can be programmed using only ETS without any additional SW. Device is equipped with KNX communication interface

evolving skills

KNX Capacitive Touch Panel 4,3"



The touch panel is equipped with a 4,3 inches display for visualisation and control of KNX installations. The IP version allows for remote control from smartphones and tablets, using eTouch App. Available in white or black finish, can be installed in portrait or landscape mode.

Main features:

- Up to 96 control functions, organized in 12 configurable pages
- User editable favorites page
- Configurable background images
- Weekly time schedules (up to 96 channels, 4 programs / channel)
- Alarm monitoring (up to 96 alarms) with event log
- Touch gestures: Up to 5 quick actions without leaving power saving mode
- Internal scene controller
- Two independent thermostats
- Remote control from smartphones and tablets via mobile apps
- Four multi-function inputs, individually configurable as binary
- or temperature probe inputs
- Built-in temperature sensor
- Real-time clock (RTC) with backup battery
- Integrated KNX bus coupling unit
- Ultra-low power consumption


| Technical Features | | | |
|--------------------|---|--|--|
| | | | |
| Mechanical data | • Dimensions: (W x H x D) : 96 x 96 x 15 mm | | |
| Mounting | Inwall box: 2 modules Italian, German box, Swiss box | | |
| wounting | Invali box. 2 modules italian, German box, Swiss box | | |
| Supply | Via ElB/KNX bus cable: 21 ÷ 32V DC, max 5 mA Auxiliary power supply: 9 ÷ 32V DC, max 55 mA | | |


Order Codes


TP35A01KNX-1 Touch Panel KNX 3,5 EVO21 - White


TP35A01KNX-3 Touch Panel KNX 3,5 EVO21 - Black














| Mechanical data | • Dimensions: 122,4 x 81,2 x 31,7 mm (without connector 122,4 x 81,2 x 40,4 mm (including connectors) |
|--------------------|---|
| Mounting | Standard square or rounded flush mounting box (not inc |
| Supply | Supply voltage 12-30V DC Do not use 29V DC from K bus as external power supply Power consumption Max. 2 W Typ. 130 mA (12V DC), mA (24V DC), 60 mA (30V DC) Connection Pluggable terminal block, pitch 3.5 mm Recommended wiring conductor cross section 0.5 m Power supply unit not included |













47.7



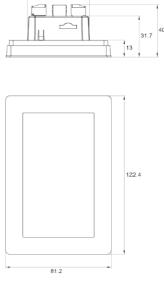

tors)

ncluded)

KNX

), 70

mm2

Order Codes

TP43M01KNX-3 KNX Touch Panel 4,3" - Black Glass

TP43M01KNX-1 KNX Touch Panel 4,3" - White Glass

KNX Capacitive Touch Panel 4,3"



IP CONNECTIVITY

The touch panel is equipped with a 4,3 inches display for visualisation and control of KNX installations. The IP version allows for remote control from smartphones and tablets, using eTouch App. Available in white or black finish, can be installed in portrait or landscape mode.

Main features:

- Up to 96 control functions, organized in 12 configurable pages
- User editable favorites page
- Configurable background images
- Weekly time schedules (up to 96 channels, 4 programs / channel)
- Alarm monitoring (up to 96 alarms) with event log
- Touch gestures: Up to 5 quick actions without leaving power saving mode
- Internal scene controller
- Two independent thermostats
- Remote control from smartphones and tablets via mobile apps
- · Four multi-function inputs, individually configurable as binary
- or temperature probe inputs
- Built-in temperature sensor
- Real-time clock (RTC) with backup battery
- Integrated KNX bus coupling unit
- Ultra-low power consumption
- Push notifications to the APP for alarms









KNX Capacitive Touch Panel 4,3"



IP CONNECTIVITY + DOOR PHONE

The touch panel is equipped with a 4,3 inches display for visualisation and control of KNX installations. The IP version allows for remote control from smartphones and tablets, using eTouch App. Available in white or black finish, can be installed in portrait or landscape mode.

Main features:

- Up to 48 control functions, organized in 6 configurable pages
- User editable favorites page
- Configurable background images
- Weekly time schedules (up to 48 channels, 4 programs / channel)
- Alarm monitoring (up to 48 alarms) with event log
- Touch gestures: Up to 5 quick actions without leaving power saving mode
- Internal scene controller
- Two independent thermostats
- Remote control from smartphones and tablets via mobile apps · Four multi-function inputs, individually configurable as binary or
- temperature probe inputs • Built-in temperature sensor
- Real-time clock (RTC) with backup battery
- Integrated KNX bus coupling unit
- Ultra-low power consumption
- Push notifications to the APP for alarms
- Video doorphone and IP cameras
- P2P SIP

Mechanical

Technical Features Mechanical • Dimensions: 122,4 x 81,2 x 31,7 mm (without connectors) data 122,4 x 81,2 x 40,4 mm (including connectors) Standard square or rounded flush mounting box (not included) Mounting Supply • Supply voltage 12-30V DC Do not use 29V DC from KNX bus as external power supply • Power consumption Max. 2.8 W Typ. 165 mA (12V DC), 85 mA (24V DC), 75 mA (30V DC) Connection Pluggable terminal block, pitch 3.5 mm • Recommended wiring conductor cross section 0.5 mm2 • Power supply unit not included

Order Codes

TP43M11KNX-3 KNX Touch Panel 4,3" - Black Glass

TP43M11KNX-1 KNX Touch Panel 4,3" - White Glass

Technical Features • Dimensions: 122,4 x 81,2 x 31,7 mm (without connectors) 122,4 x 81,2 x 40,4 mm (including connectors)

| data | 122,4 x 81,2 x 40,4 mm (including connectors) |
|----------|--|
| Mounting | Standard square or rounded flush mounting box (not in |
| Supply | Supply voltage 12-30V DC Do not use 29V DC from bus as external power supply Power consumption max. 5 W Typ. 165 mA (12V DC mA (24V DC), 75 mA (30V DC) |

- Connection Pluggable terminal block, pitch 3.5 mm
- Recommended wiring conductor cross section 0.5 mm2
- Power supply unit not included









Order Codes TP43I21KNX-3 KNX Touch Panel 4.3" - Black Glass TP43I21KNX-1 included) KNX Touch Panel 4,3" - White Glass KNX C), 85

TOUCHPANEL

KNX Capacitive Touch Panel 7"



IP CONNECTIVITY + DOOR PHONE

The device touch panel 7" is a control unit for KNX-based home and building automation installations, featuring a 7" TFT capacitive touch screen, integrated web server, and video door phone function. Available in GLASS (full glass front) and CLASSIC (interchangeable front frames) models.


Main features:

- · Control and monitoring of KNX devices
- Simple, user-friendly navigation through floorplans and zones
- Up to 512 configurable pages, with up to 8 control functions per page (more than 4000 functions)
- Customizable background images
- User-editable scenes
- Weekly time schedules
- Alarm monitoring with event log
- Presence simulation with day and night schedules
- Logic functions (logic gates, comparators, timers, etc.)
- Four independent thermostats
- Touch gestures: 4 directional gestures + multitouch gesture
- Video door phone function, with full duplex audio and echo cancellation
- IP camera monitoring
- Remote control from smartphones, tablets, and PCs
- Integrated stereo loudspeakers and digital microphone
- Four multi-function inputs, individually configurable as binary or temperature probe inputs (see probe code TS01I01ACC)
- Real-time clock (RTC) with backup battery
- Integrated KNX bus coupling unit
- Very low power consumption
- Doorphone and IP cameras
- P2P SIP & SIP register

Technical Features

| Mechanical data | • Dimensions: 228 x 156 x 36 / 39 mm (Glass / Classic) |
|-----------------|---|
| Mounting | • Wall-mounting box, 200 x 130 x 60 mm (code TP70I01ACC) |
| Supply | Supply voltage 12V DC ± 5% Power consumption: typ. 2.3 W (energy saving) / 4.7 W |

- (regular operation), max. 17 W
- Connection: Pluggable terminal block, 5.08 mm pitch
- Recommended wiring: Conductor section 1.5 mm2
- Power supply unit (included): 12V DC / 25 W PSU, DIN-rail mounted. 53 mm. Input voltage 90-264V AC @ 50-60 Hz

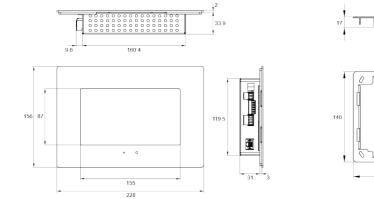



Order Codes

TP70I12KNX-GL-3 KNX Touch Panel 7" - Black Glass

TP70I12KNX-GL-1 KNX Touch Panel 7" - White Glass

TP70I12KNX-PL-3 KNX Touch Panel 7" - Black Plexi

TP70I12KNX-PL-1 KNX Touch Panel 7" - White Plexi

TP70I01ACC Wall mounting box

KNX Capacitive Touch Panel 10,1"

IP CONNECTIVITY + DOOR PHONE

The device touch panel 10.1" is a control unit for KNX-based home and building automation installations, featuring a 10.1" TFT capacitive touch screen with IPS technology, integrated web server, and video door phone function. Available in GLASS (full glass front) and CLASSIC (interchangeable front frames) models.

Main features:

- · Control and monitoring of KNX devices
- Simple, user-friendly navigation through floorplans and zones
- Up to 512 configurable pages, with up to 8 control functions per page (more than 4000 functions)
- Customizable background images
- User-editable scenes
- Weekly time schedules
- Alarm monitoring with event log
- Presence simulation with day and night schedules
- Logic functions (logic gates, comparators, timers, etc.)
- Four independent thermostats
- Touch gestures: 4 directional gestures + multitouch gesture
- Video door phone function, with full duplex audio and echo cancellation
- IP camera monitoring
- Remote control from smartphones, tablets, and PCs
- Integrated stereo loudspeakers and digital microphone
- · Four multi-function inputs, individually configurable as binary or
- temperature probe inputs (see eelectron probe code TS01I01ACC)
- Real-time clock (RTC) with backup battery
- Integrated KNX bus coupling unit
- Very low power consumption
- Doorphone and IP cameras
- P2P SIP & SIP register

| Technical Features | | | |
|--------------------|---|--|--|
| Mechanical data | • Dimensions: 302 x 221 x 40 / 42 mm (Glass / Classi | | |
| Mounting | • Wall-mounting box, 275 x 186 x 56 mm (Code TP10I01ACC) | | |
| Supply | Supply voltage 12V DC ± 5% Power consumption: typ. 2.3 W (energy saving) / 4 (regular operation), max. 17 W Connection: Pluggable terminal block, 5.08 mm pi Recommended wiring: Conductor section 1.5 mm Power supply unit (included): 12V DC / 24 W PSU, DIN-rail mounted. 77 mm. Input voltage 100-240V A 50-60 Hz | | |

TOUCHPANEL





Order Codes

TP10I12KNX-GL-3 Touch Panel KNX 10,1" - Black Glass

TP10I12KNX-GL-1 Touch Panel KNX 10,1" - White Glass

TP10I12KNX-PL-3 Touch Panel KNX 10,1" - Black Plexi

TP10I12KNX-PL-1 Touch Panel KNX 10,1" - White Plexi

TP10I01ACC Wall mounting box

4.7 W

bitch n2 AC @

KNX MiniPad



8 CH - THERMOSTAT - COMPLETE

The MINIPAD KNX pushbutton panel of the eelecta® series is equipped with 8 buttons that can be configured for the management of lights, shutters, dimmers, or other programmable command and control functions.

There are also 8 white LEDs and one RGB, each freely configurable with ETS. In the rear part, 3 inputs are available, two of which are dedicated to interfacing potential-free contacts (clean – for example sensors, traditional buttons, etc.) and one freely configurable by ETS as a dry or analogue contact. The control panel includes a temperature sensor that can also be configured as a thermostat for the control of two distinct areas, both with integrated PI controller for piloting heating, cooling, valves, 6-way valves, fan coils 2 and 4 pipes.

Moreover, 16 logic blocks are available to implement simple expressions with logical or threshold operator or complex expressions with algebraic and conditional operators; It is possible to use predefined algorithms as proportional controls of temperature and humidity or dew point calculation. The device also integrates the "Virtual Holder Logic"; the field of application is the hotel room: through a magnetic sensor installed on the door and connected to a digital input, accurate presence information is managed. The presence detection solution can deduce the presence of people in the room using one or more dedicated sensors. It also detects an unexpected presence and is able to differentiate more behaviours.

The KNX communication interface is included. The device can be configured via the ETS application program to communicate with the KNX Data Secure protocol.

| Technical Features | | |
|--|---|--|
| Mechanical data | MiniPad Dimensions (A. x L.) 90 x 90 mm | |
| Mounting | • Built-in box: Italian 2 modules, standard box German, Swiss, British | |
| Supply | Bus ElB/KNX: 21 ÷ 32V DC Max 20 mA | |
| Inputs | Inputs: 2 inputs for digital contacts and one digital/ analog Maximum Cable Lenght: ≤ 10 m Voltage Scanning: 3,3 V DC Current Scanning: ≤ 1 mA | |
| Rear input - analog mode for temperature probe | For NTC temperature probe eelectron code: • TS01A01ACC (range from -20°C to +100°C) • TS01B01ACC (range from -50°C to +60°C) • TS01D01ACC (range from -40°C to 125°C) • Max. length of Connecting Cable: ≤ 30 m (twisted cable) | |



Order Codes

MB80D01KNX 8 channel KNX - White

MB80D01KNX-BL 8 channel KNX - Black

MB80D1KNX-SWH 8 channel KNX - White Helvetia








8 channel KNX - White MB80D01KNX 8 channel KNX - Black MB80D01KNX-BL

ck 8 ch -




(4)

MiniPad



8 channel KNX - White Helvetia MB80D1KNX-SWH





Horizone Web Server



HORIZONE is a webserver specifically engineered for supervision and monitoring of Home & Building Automation systems. Based on KNX standard and suitable for integration with Modbus standard and other technologies used in intelligent buildings, alarm systems, fire and smoke detections systems, audio/video distribution systems. Compatible with operating system Mac OS X, Microsoft Windows, Apple iOS and Google Android, the configuration and use of HORIZONE takes place directly through its web interface, which can be accessed through a the most popular browser on the market browser from any device (pc/mac, smartphone e tablet) or with free app available on iOS and Android store.

SIZES

| | KNX GROUP ADDRESSES | SCENES | LOGICS | PAGES | LOADS |
|--|------------------------|--------|--------|-----------|-------|
| Horizone Web Server 200 KNX group addresses | 200 | 30 | 30 | UNLIMITED | 10 |
| Upgrade up to 800 KNX group addresses | 800 | 100 | 100 | UNLIMITED | 20 |
| Upgrade up to 1400 KNX group addresses | 1400 | 100 | 100 | UNLIMITED | 40 |

**On demand Horizone Upgrade over 1400 KNX group addresses

| Hardware Features | | | | |
|---------------------|--|--|--|--|
| Mechanical data | Dimensions: 5 DIN modules | | | |
| Supply | • Via EIB/KNX bus cable: 21 ÷ 32V DC | | | |
| Aux Supply | 12 ÷ 24V DC 18 mA @12 V; 110 mA @24 V | | | |
| Communication ports | KNX RS232 (1x) Screw connector RS485 (1x) Screw connector USB 2.0 (2x) LAN (1x) RJ-45 jack (10/100 Mbps) | | | |

| Additional Software Modules | | | | |
|-----------------------------|--|--|--|--|
| IN00B02MBS | MODBUS Module for HORIZONE WS | | | |
| IN00B02BEN | BENTEL Module for HORIZONE WS | | | |
| IN00B02IES | ELMO/IESS Module for HORIZONE WS | | | |
| IN00B02TEC | TECNOALARM Module for HORIZONE WS | | | |
| IN00B02TUT | TUTONDO Module for HORIZONE WS | | | |
| IN00B02VIV | VIVALDI Module for HORIZONE WS | | | |
| IN00B02VOI | VOIP Module for HORIZONE WS | | | |
| IN00B02SON | SONOS Module for HORIZONE WS | | | |
| IN00B02DAT | Report and Accounting Module for HORIZONE WS | | | |

| 8 HORIZONE | |
|-------------------------|-------|
| E HORIZONE | |
| | |
| | |
| PROG. | • |
| 6 | |
| CE Address: POWER | 0 |
| AUX RESET SD-CARD RS232 | RS485 |

Order Codes


IN00B02WEB Web Server Horizone 200 points


IN00B03UPG Upgrade up to 800 points

IN00B04UPG Upgrade up to 1400 points

| Software Features | | | | |
|--------------------------|---|--|--|--|
| Standard technologies | • KNX • RS232 / RS485 / TCP | | | |
| User interface | Web / HTML5 App iOS / Android | | | |
| Number of clients | Unlimited | | | |
| Simultaneous connections | • Up to 20 | | | |
| Features | Lighting HVAC Blinds / Shutters Irrigation Alarms Power consumption Load management Weather IP Camera Door intercom system (SIP server only) Cloud services Voice control IFTTT | | | |
| Advanced functions | Scenarios with parametrical wait functions Boolean logics Thresholds and values comparators Mathematical operations Scheduler Notifications Advanced logic module | | | |
| Users and security | Unlimited usersSSL Internet secure access | | | |

Horizone Web Server

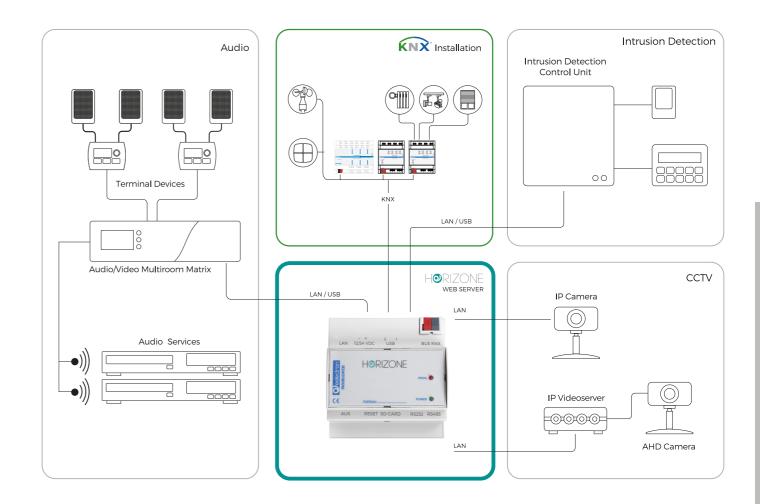

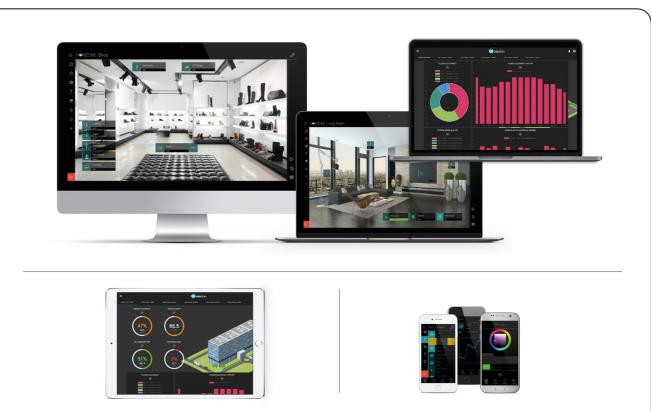





WEBSERVER

Horizone MINI Web Server



SIZES

HORIZONE MINI is a webserver specifically engineered for supervision and monitoring of Home & Building Automation systems. Based on KNX standard and suitable for integration with Modbus standard*. Compatible with operating system Mac OS X, Microsoft Windows, Apple iOS and Google Android, the configuration and use of HORIZONE takes place directly through its web interface, which can be accessed through a the most popular browser on the market browser from any device (pc/mac, smartphone e tablet) or with free app available on iOS and Android store.

*Only for Modbus energy meter

| Software Features | | | | |
|--------------------------|--|--|--|--|
| Standard technologies | KNX (max 200 group addresses) RS485 / TCP Energy meter USB | | | |
| User interface | Web / HTML5App iOS / Android | | | |
| Number of clients | Unlimited | | | |
| Simultaneous connections | • Up to 20 | | | |
| Features | Lighting HVAC Blinds / Shutters Irrigation Alarms Energy management Load management SONOS (Visualization only) Cloud services Voice control | | | |
| Advanced functions | Scenarios with parametrical wait functions Boolean logics Thresholds and values comparators Mathematical operations Scheduler Programmable events Notifications | | | |

IN00M02WEB Horizone MINI Web Server 200 points

Order Codes

| | KNX GROUP ADDRESSES | SCENES | LOGICS | PAGES | |
|---|------------------------|--------|--------|-------|----|
| Horizone Web Server 200 KNX group addresses | 200 | 30 | 30 | 12 | 10 |

| Hardware Fe | lardware Features | | |
|---------------------|--|--|--|
| Dimensions | 90,5 x 62 x 36 mm2 DIN rail Module | | |
| Aux Supply | 12 ÷ 24V DC 18 mA @12 V; 110 mA @24 V | | |
| Communication ports | KNX RS485 (1x) Screw connector USB 2.0 (1x) LAN (1x) RJ-45 jack (10/100 Mbps) | | |

Energy Meter USB

USB ENERGY METER

This is an indirect insertion single-phase energy meter for DIN rail mounting and the connection is made via USB with the Horizone webserver or Horizone Mini.

Through the user interface of the web server to which it is connected, it allows monitoring of the power, voltage and current relative to the point where it is mounted. Thanks to the amperometric clamp supplied, with opening insertion, it is possible to measure any electrical phase available in the electrical panel, without having to intervene directly in the relative wiring. To work requires a free USB port on the Horizone or Horizone Mini webserver.


Order Codes

PM10M01USB USB Energy Meter

HORIZONE




IP Touch Panel 5"

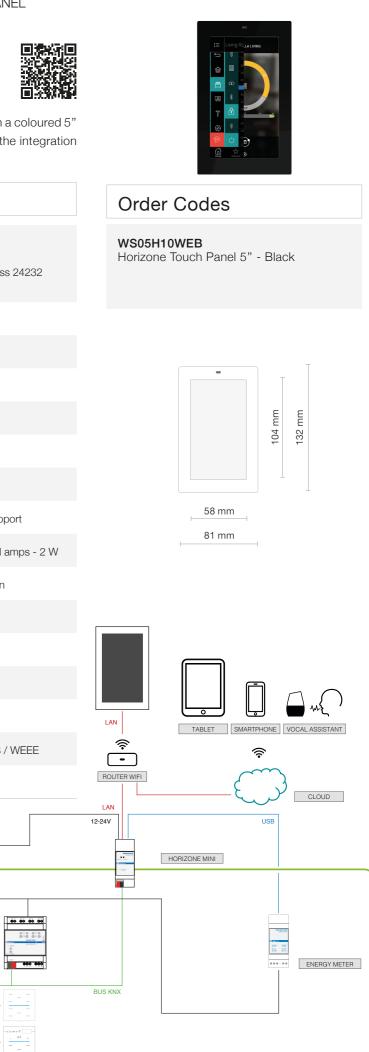

Horizone IP Touch Panel is an Android based touch panel with a coloured 5" display in which can be installed third-party applications for the integration of different systems.

Technical Features

| Dimensions: | 81x132x14 mm Inwall Box 2M – Ex. Bticino 502E Inwall Box Round 60 Diameter – Ex. Gewiss 2423 Inwall Box 3M – Ex. Bticino 503E |
|-------------------|--|
| Orientation | Horizontal or Vertical |
| Supply | POE (Power Over Ethernet) |
| Monitor | LCD HD IPS 5" |
| Resolution | • 1280x720 px |
| Color | • 16,7 Millions Colors (True Colors) |
| Brightness | • 400 nits |
| Touch Screen | Capacitive with multi touch & gestures support |
| Speakers | High definition audio through incorporated amps |
| Microphone | Integrated – echo canceling high resolution |
| Gyroscope | Auto survey orientation |
| Proximity | Integrated |
| Brightness Sensor | Integrated |
| Connectivity | LAN 100 baseIT |
| Certification | • CE / FCC CLASS B / FCC part15 / ROHS / WEE |
| Operating System | Android 6 |
| | 230V |

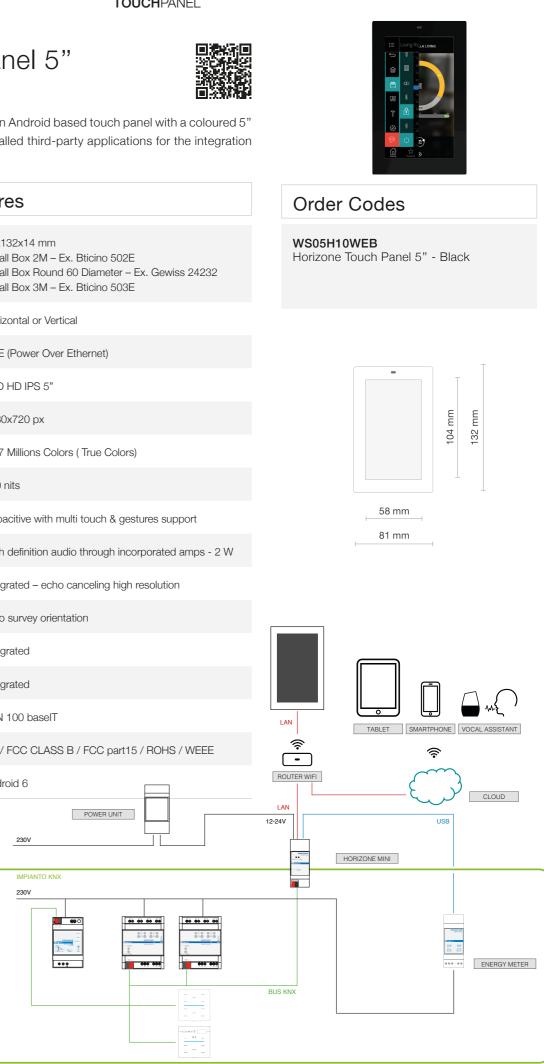

TOUCHPANEL

IP Touch Panel 8"



Horizone IP Touch Panel is an Android based touch panel with a coloured 8" display in which can be installed third-party applications for the integration of different systems.





Technical Features Dimensions: • 224x149x16 • Inwall Box 154x98x69 mm - Ex. Bticino 16204 Orientation Horizontal or Vertical Supply • POE (Power Over Ethernet) • LCD HD IPS 8" Туре Resolution • 1280x720 px Color • 16,7 Millions Colors (True Colors) Brightness • 400 nits **Touch Screen** • Capacitive with multi touch & gestures support Speakers • High definition audio through incorporated amps - 2 W Microphone • Integrated – echo canceling high resolution Gyroscope Auto survey orientation Proximity Integrated Integrated **Brightness Sensor** LAN 100 baselT Connectivity Certification • CE / FCC CLASS B / FCC part15 / ROHS / WEEE **Operating System** Android 6 POWER UNIT 230V IMPIANTO KNX 230V 🚊 🚥

000 000

.....

Order Codes

WS08H10WEB Horizone Touch Panel 8" - Black

WS08H20WEB Horizone Touch Panel 8" - White



TABLET SMARTPHONE VOCAL ASSISTAN

ই

CLOUD

ENERGY METER

LAN

LAN

BUS KNX

12-24V

ই

-ROUTER WIFI

HORIZONE MINI

Actuators and Controllers



Lighting Management Dimming, DALI, DMX Climate Control Shutters Management Sensors Metering System Components Interfaces





| () | | | атекке: 💮 | G 2017 |
|-----------|-----------|------------|-----------|---------------------|
| LN | PE | | | CE |
| 0 | 0 | 0 | 0 | DALD |
| 1/9 | 2/10 | 3/11 | 4/12 | Green: D1/ Blue: D2 |
| 🖲 Bo | st 🜒 — En | r — 🖲 — E | in — 🌒 🗍 | |
| IC02D01 | | KNX-DALI T | W 2CH | Red: Cmd/ Err |
| Oeelect | ron | | | KNX |
| | | | | S (P) |
| 🖲 — Cr | nd — 🐌 | 9 — E | irr — 🐌 | |
| 5/13 | 6/14 | 7/15 | 8/16 | MAN |
| 0 | 0 | 0 | 0 | 0 |
| D1+ D1- | · D2+D2- | KNX | (/ PRG | KNX |
| 00 | 00 | - | 0 | |
| | | | | |
| | 00 | • | 9 | 1 48 |







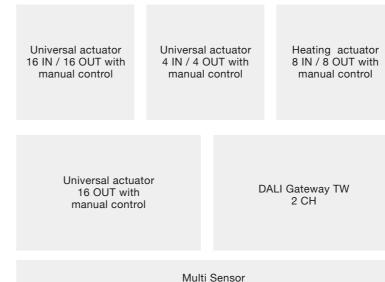

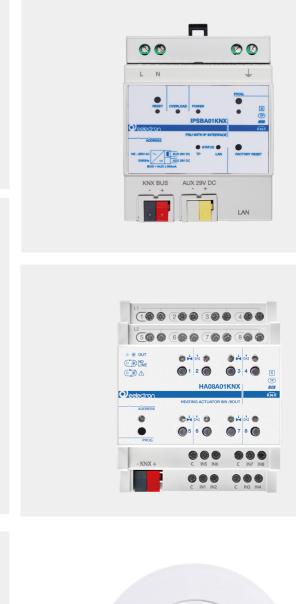



INPUTS

Module 4 Digital Inputs $4 \text{ IN} - \mathbf{F}$ Series



The BI04F01KNX device is equipped with 4 inputs for interfacing dry contacts, for example sensors, switch buttons, etc.

Inputs functions are: on / off control, dimmers, roller shutters and scene recall, etc.

Short and long pressure management, switching, sequences are possible. The lines can be monitored using an end of line resistor (EOL) of $1.8K\Omega$ [1/8W] value which allows the device to manage sensors with a higher level of safety such as magnetic contacts, motion detectors.

The pulse counter function is also available for counting the pulses detectable on each input. One of the 4 inputs can be configured as analogue for the connection of NTC temperature probes (see eelectron probes code TS00A01ACC / TS00B01ACC) with which to send the temperature measurement on the bus or manage a complete thermostat module. The thermostat manages 2 stages with an integrated PI controller for controlling heating and cooling equipment, valves, 2 and 4-pipe fan coils, etc. Two of the 4 inputs can be configured as "smart sensor" for the connection of 'plug-in sensor' (see SM03E01ACC CO₂ - temperature, SM03E02ACC VOC - temperature - eCO2). On the front panel there is a LED to display the status of each input.

Moreover, 10 logic blocks are available to implement simple expressions with logical or threshold operator or complex expressions with algebraic and conditional operators; It is possible to use predefined algorithms as proportional controls of temperature and humidity or dew point calculation.

| - | ۵.e | | - | 388 | - |
|------|--------|------------|-------|-----------|---------------|
| IN | 11 C | IN2 C | IN3 | C IN4 | C |
| 10 | | | | | |
| | | | | | |
| | | Q 1 | 2 🌒 | 3 4 | • |
| | | | | | 8 19 68 |
| Oeek | deno | | BI04F | 01KNX | EII KN |
| | ÓDRESS | | м | ODULE 4IN | |
| | • | | | | |
| | | | | | |
| | PROG. | | | | |
| | KNX + | | | | |
| Ì. | | | | | |

Module 8 Digital Inputs 8 IN - F Series

The BI08F01KNX device is equipped with 8 inputs for interfacing dry contacts, for example sensors, switch buttons, etc.

Inputs functions are: on / off control, dimmers, roller shutters and scene recall, etc.

Short and long pressure management, switching, sequences are possible. The lines can be monitored using an end of line resistor (EOL) of $1.8K\Omega$ [1/8W] value which allows the device to manage sensors with a higher level of safety such as magnetic contacts, motion detectors.

The pulse counter function is also available for counting the pulses detectable on inputs (1, 3, 5, 7). One of the 8 inputs can be configured as analogue for the connection of NTC temperature probes (see eelectron probes code TS00A01ACC / TS00B01ACC) with which to send the temperature measurement on the bus or manage a complete thermostat module. The thermostat manages 2 stages with an integrated PI controller for controlling heating and cooling equipment, valves, 2 and 4-pipe fan coils, etc. Two of the 4 inputs can be configured as "smart sensor" for the connection of 'plug-in sensor' (see SM03E01ACC CO₂ - temperature, SM03E02ACC VOC - temperature - eCO₂). On the front panel there is a LED to display the status of each input.

Moreover, 10 logic blocks are available to implement simple expressions with logical or threshold operator or complex expressions with algebraic and conditional operators; It is possible to use predefined algorithms as proportional controls of temperature and humidity or dew point calculation.

Technical Features

| Mechanical data | Dimensions: 4 DIN modules |
|--|--|
| Supply | Via ElB/KNX bus cable: 21 ÷ 32V DC Max 15 mA |
| Input - digital mode | For free potential contacts (dry contacts) Max. length of Connecting Cables ≤ 100 m (twisted cable) |
| Input - analog mode for temperature probe | For NTC temperature probe eelectron code: • TS01A01ACC (range from -20°C to +100°C) • TS01B01ACC (range from -50°C to +60°C) • TS01D01ACC (range from -50°C to +60°C) • Max. length of Connecting Cable: ≤ 30 m (twisted cab |
| | |

| Technical Features | | | | | |
|--|---|--|--|--|--|
| Mechanical data | Dimensions: 4 DIN modules | | | | |
| Supply | Via EIB/KNX bus cable: 21 ÷ 32V DC Max 15 mA | | | | |
| Input - digital mode | For free potential contacts (dry contacts) Max. length of Connecting Cables ≤ 100 m (twisted cable) | | | | |
| Input - analog mode for temperature probe | For NTC temperature probe eelectron code: • TS01A01ACC (range from -20°C to +100°C) • TS01B01ACC (range from -50°C to +60°C) • TS01D01ACC (range from -50°C to +60°C) • Max. length of Connecting Cable: ≤ 30 m (twisted cable) | | | | |
| | | | | | |

Order Codes

BI04F01KNX Din Module 4 Digital Inputs

SM03E01ACC Plug-in sensor CO₂ + Temperature

SM03E02ACC Plug-in sensor VOC + CO_2 + eCO_2 + Temperature





Order Codes

BI08F01KNX Din Module 8 Digital Inputs

SM03E01ACC Plug-in sensor CO₂ + Temperature

SM03E02ACC Plug-in sensor VOC + CO_{2} + eCO_{2} + Temperature

ed cable)

INPUTS

Universal DIN Module

8 IN - HIGH VOLTAGE 100-250 V AC/DC

The BI08H01KNX binary input device is a DIN-rail mounted device with 8 inputs for 100-230 V AC voltage. It can detect both states (voltage present or not present) and voltage pulses.

Therefore, it can be used, for example, to monitor voltages (if the mains voltage is present), to detect switching or system states, to detect the change of state during the switching on or off of a voltage (if a switch or button has been operated, if only a switch or button has been operated). Or more simply for the classic functions of on/off / dimming of lamps or dimming control.



Module 16 Digital Inputs 16 IN - F Series

Device 16 Input Module BI16F01KNX is an EIB/ KNX DIN rail mounting device useful to interface commands (e.g. push buttons) for any kind of applications. The device is equipped with 16 binary inputs. Inputs can be connected to conventional switching devices (potential free), e.g. push buttons, switches, floating contacts, for switching functions with pulse edge evaluation (e.g. rising or falling edge, toggle...).

Inputs can be configured with ETS SW as output to drive Leds. Inputs can be used for on/off commands, dimming, shutter control, scene recall and control; outputs include switching function, scene recall and control logic function.

Device is equipped with KNX communication interface.

| Technical Fea | chnical Features Order Codes | | | | |
|-----------------|--|---|-------------------------|--|---|
| Mechanical data | • Dimensions: 5 DIN modules | BI08H01KNX | | | |
| Supply | Via EIB/KNX bus cable: 21 ÷ 32V DC Max 9,5 mA | Universal module 8 IN - High voltage 100-250 V AC/DC | Technical F | eatures | |
| Uscite | 8 binary 230VAC inputs with 1 common terminal by | 8 binary 230VAC inputs with 1 common terminal by | Mechanical data | Dimensions: 8 DIN modules | |
| | each of them • Scanning voltage 230V AC • Input Voltage 100-250V AC • Max cable lenght 100m | Scanning voltage 230V AC | | Supply | Via EIB/KNX bus cable: 21 ÷ 32 Auxiliary supply: 230V AC |
| | • Max cable lenght 100m | | Input - digital mode | For free potential contacts (dry c Max. length of Connecting Cable cable) | |





DC, max 5 mA

100 m (twisted

Order Codes

BI16F01KNX Din Module 16 Digital Inputs

SM03E01ACC Plug-in sensor CO₂ + Temperature

SM03E02ACC Plug-in sensor VOC + CO_2 + eCO_2 + Temperature

INPUTS AND OUTPUTS

In-wall module multifunctional 4 IN / 2 OUT



IO42E01KNX is an input and outputs interface device and can be configured with ETS® to communicate with the KNX Data Secure protocol.

- Module includes:
- 2 digital inputs
- 1 analog / digital input
- 1 digital / analog / smart sensor input
- 2 relay output (bistable)

Digital inputs are intended to be connected to free potential contacts and can interface sensors, traditional buttons, etc; they can be used to on/off commands, dimming, shutter control, scene recall and control, sequences of 3 objects.

Inputs 3 and 4 can be configured as analogue for the connection of NTC temperature probes (see eelectron probes code TS01A01ACC / TS01B01ACC/ TS01D01ACC) with which to send the temperature measurement on the bus or manage a complete thermostat module. The thermostat manages 2 stages with an integrated PI controller for controlling heating and cooling equipment, valves, 2 and 4-pipe fan coils.

Input 4 can be configured as "smart sensor" for connection of the plug-in sensors: SM03E01ACC that includes a di temperature sensor (range from -5°C to +50°C) and a CO2 sensor (range from 10 ppm to 1000 ppm) and SM03E02ACC that includes a temperature sensor (range from -5°C to +50°C) and a VOC sensor for measuring Indoor Air Quality (IAQ) and CO2 equivalent (eCO2).

Device 2 outputs on board can be configured:

· Each output can be configured independently for load control (2 independent channels)

• Outputs can be configured in pairs for the management of roller shutters and blinds; (1 channel).

· For controlling a servomotor, in pairs.

• For logic interlock control.

The device integrates an antenna with BEACON BLE (Bluetooth Low Energy) function. Data format compatible with iBeacon® and Eddystone®.

The device allows you to set the transmission frequency and signal strength.

BLE technology allows the sending of messages to mobile devices. These devices must have an app that allows them to receive information from BLE beacons.

Moreover, 12 logic blocks are available to implement simple expressions with logical or threshold operator or complex expressions with algebraic and conditional operators; It is possible to use predefined algorithms as proportional controls of temperature and humidity or dew point calculation.

The device also integrates the "Virtual Holder Logic"; the field of application is the hotel room: through a magnetic sensor installed on the door and connected to a digital input, accurate presence information is managed. The presence detection solution can deduce the presence of people in the room using one or more dedicated sensors. It also detects an unexpected presence and is able to differentiate more behaviors.

| Technical Features | | | | |
|--|--|--|--|--|
| Mechanical data | • Dimensions: (Ø x H) 52 x 28 mm | | | |
| Mounting | • Inwall | | | |
| Supply | Via EIB/KNX bus: 21 ÷ 32V DC Max 10 mA | | | |
| Input - digital mode | or free potential contacts (dry contacts) Max. length of Connecting Cables ≤ 30 m (twisted cable) | | | |
| Input - analog mode for temperature probe | Connectable to NTC probe eelectron code: TS01A01ACC (range from -20°C to +100°C) TS01B01ACC (range from -50°C to +60°C) TS01D01ACC (range from -40°C to 125°C) Max. length of Connecting Cable: ≤ 20 m (twisted cable) | | | |
| Output rate | 10 A cos φ 1 - 230V AC Max capacitance @230 V: 21 μF 5.000 cycles Incandescent lamps max load: 1500 W 50.000 cycles Fluorescent lamps max load: 6 x18 W 25.000 cycles Halogen lamps max load: 500 W 50.000 cycles Discharge lamps max load: 200 W 25.000 cycles | | | |

Order Codes

IO42E01KNX Multifunctional in-wall module 4 Inputs / 2 Outputs KNX + BLE

Universal Module

4 IN / 4 OUT PLUS - F Series



Device IO04F01KNX is a DIN rail EIB / KNX actuators with 4 relay outputs that can be configured as:

- 4 outputs for light / load control
- 4 channels for valve in PWM (solenoid actuators)
- · 2 channels for roller shutter / venetian control
- · 2 channels for 3-point valve control
- 1 fan coil actuators 2-pipes

The device also includes 4 inputs that can be connected to pushbuttons, switches, or be configured as outputs to activate individual signaling LEDs (eelectron code LD00A01ACC / LD00A11ACC) and can be used for on / off, dimming, shutters or venetian blinds / scenarios, sequences, stepby-step commands, etc. 4 inputs (of the 16) are configurable as analogue for the connection of NTC temperature probes (see probes eelectron code TS00A01ACC / TS00B01ACC) with which to send 4 temperature measurements on the bus and manage a simple on / off controls (e.g. thermo furniture). It is also possible to enable 4 complete thermostat modules; each thermostat module manages 2 stages with integrated PI controller for driving heating and cooling equipment, valves, 2 and 4-pipe fan coils, etc. Version IO04F01KNX-SD includes a microSD card reader includes a microSD card with which you can save the programming of the device to be able to restore it on an identical device in order to avoid programming in field or to allow a fast restore in case of failure.

Technical Features

| Mechanical data | Dimensions: 4 DIN modules |
|---|--|
| Supply | Via ElB/KNX bus cable: 21 ÷ 32V DC Max 10 ÷ 30 mA (ETS parameter) |
| Input - digital mode | For free potential contacts (dry contacts) Max. length of Connecting Cables ≤ 30 m (twisted) |
| Input - analog mode for temperature probe | For NTC temperature probe eelectron code: TS01A01ACC (range from -20°C to +100°C) TS01B01ACC (range from -50°C to +60°C) TS01D01ACC (range from -40°C to 125°C) Max. length of Connecting Cable: ≤ 20 m (twisted) |
| Output rate | 16 A cos φ 1 - 230V AC 8 A cos φ 0.6 - 230V AC Max current relay output: 16 A/16 AX (140 μF) Max peak current: 165 A / 20 ms Incandescent lamps: max 10 A Motors e motor reduction units: max 10 A Fluorescent lamps (max 140 μF) max 3 A (700) Electronic ballast: max 6 A LED's lamps drivers: always check that the max peak current drawn by led power supply is than maximum peak current allowed for the |







Order Codes

IO04F01KNX Universal Actuator 4 IN / 4 OUT Plus

IO04F01KNX-SD Universal Actuator 4 IN / 4 OUT + SD Card

ed cable)

ed cable)

(W 0

aximum s lower ne relay



Universal Module

8 IN / 8 OUT PLUS - F Series



Device IO08F01KNX is a DIN rail EIB / KNX actuators with 8 relay outputs that can be configured as:

- 8 outputs for light / load control
- 8 channels for valve in PWM (solenoid actuators)
- 4 channels for roller shutter / venetian control
- 4 channels for 3-point valve control
- 2 fan coil actuators 2-pipes

It is also possible to combine 2 or 3 relays with logic interlock for 4-pipe / 3-speed fan coil control or combine groups of relays (up to 8) for special function using logic interlock .

The device also includes 8 inputs that can be connected to pushbuttons, switches, or be configured as outputs to activate individual signaling LEDs (eelectron code LD00A01ACC / LD00A11ACC) and can be used for on / off, dimming, shutters or venetian blinds / scenarios, sequences, stepby-step commands, etc. 4 inputs (of the 8) are configurable as analogue for the connection of NTC temperature probes (see probes eelectron code TS00A01ACC / TS00B01ACC) with which to send 4 temperature measurements on the bus and manage a simple on / off controls (e.g. thermo furniture). It is also possible to enable 2 complete thermostat modules; each thermostat module manages 2 stages with integrated PI controller for driving heating and cooling equipment, valves, 2 and 4-pipe fan coils, etc. Version IO08F01KNX-SD includes a microSD card reader includes a microSD card with which you can save the programming of the device to be able to restore it on an identical device in order to avoid programming in field or to allow a fast restore in case of failure.

Technical Features

| Teorinioari | |
|---|--|
| Mechanical data | Dimensions: 4 DIN modules |
| Supply | Via ElB/KNX bus cable: 21 ÷ 32V DC Max 10 ÷ 30 mA (ETS parameter) |
| Input - digital mode | For free potential contacts (dry contacts) Max. length of Connecting Cables ≤ 30 m (twisted cable) |
| Input - analog mode for temperature probe | For NTC temperature probe eelectron code: TS01A01ACC (range from -20°C to +100°C) TS01B01ACC (range from -50°C to +60°C) TS01D01ACC (range from -40°C to 125°C) Max. length of Connecting Cable: ≤ 20 m (twisted cable) |
| Output rate | 16 A cos φ 1 - 230V AC 8 A cos φ 0.6 - 230V AC Max current relay output: 16 A/16 AX (140 μF) Max peak current: 165 A / 20 ms Incandescent lamps: max 10 A Motors e motor reduction units: max 10 A Fluorescent lamps (max 140 μF) max 3 A (700 W) Electronic ballast: max 6 A LED's lamps drivers: always check that the maximum peak current drawn by led power supply is lower than maximum peak current allowed for the relay |



Universal Module 12 IN / 12 OUT PLUS - F Series

Device IO12F01KNX is a DIN rail EIB / KNX actuators with 12 relay outputs that can be configured as:

- 12 outputs for light / load control
- 12 channels for valve in PWM (solenoid actuators)
- 6 channels for roller shutter / venetian control
- 6 channels for 3-point valve control
- 3 fan coil actuators 2-pipes / 2 fan coil actuators 4-pipes

The device also includes 12 inputs that can be connected to pushbuttons, switches, or be configured as outputs to activate individual signaling LEDs (eelectron code LD00A01ACC / LD00A11ACC) and can be used for on / off, dimming, shutters or venetian blinds / scenarios, sequences, stepby-step commands, etc. 4 inputs (of the 12) are configurable as analogue for the connection of NTC temperature probes (see probes eelectron code TS00A01ACC / TS00B01ACC) with which to send 4 temperature measurements on the bus and manage a simple on / off controls (e.g. thermo furniture). It is also possible to enable 3 complete thermostat modules; each thermostat module manages 2 stages with integrated PI controller for driving heating and cooling equipment, valves, 2 and 4-pipe fan coils, etc. Version IO12F01KNX-SD includes a microSD card reader includes a microSD card with which you can save the programming of the device to be able to restore it on an identical device in order to avoid programming in field or to allow a fast restore in case of failure.

Order Codes

IO08F01KNX Universal Actuator 8 IN / 8 OUT Plus

IO08F01KNX-SD Universal Actuator 8 IN / 8 OUT + SD Card

Technical Features

| Mechanical data | Dimensions: 6 DIN modules |
|---|--|
| Supply | Via EIB/KNX bus cable: 21 ÷ 32V DC Max 10 ÷ 30 mA (ETS parameter) |
| Input - digital mode | For free potential contacts (dry contacts) Max. length of Connecting Cables ≤ 30 m (twisted) |
| Input - analog mode for temperature probe | For NTC temperature probe eelectron code: TS01A01ACC (range from -20°C to +100°C) TS01B01ACC (range from -50°C to +60°C) TS01D01ACC (range from -40°C to 125°C) Max. length of Connecting Cable: ≤ 20 m (twisted) |
| Output rate | 16 A cos φ 1 - 230V AC 8 A cos φ 0.6 - 230V AC Max current relay output: 16 A/16 AX (140 μF) Max peak current: 165 A / 20 ms Incandescent lamps: max 10 A Motors e motor reduction units: max 10 A Fluorescent lamps (max 140 μF) max 3 A (700) Electronic ballast: max 6 A LED's lamps drivers: always check that the max peak current drawn by led power supply is than maximum peak current allowed for the |





Order Codes

IO12F01KNX Universal Actuator 12 IN / 12 OUT Plus

IO12F01KNX-SD Universal Actuator 12 IN / 12 OUT + SD Card

d cable)

d cable)

) W)

ximum lower e relay

Universal Module

16 IN / 16 OUT PLUS - F Series



Device IO16F01KNX is a DIN rail EIB / KNX actuators with 16 relay outputs that can be configured as:

- 16 outputs for light / load control
- 16 channels for valve in PWM (solenoid actuators)
- 8 channels for roller shutter / venetian control
- 8 channels for 3-point valve control
- 4 fan coil actuators 2-pipes

It is also possible to combine 2 or 3 relays with logic interlock for 4-pipe / 3-speed fan coil control or combine groups of relays (up to 8) for special function using logic interlock .

The device also includes 16 inputs that can be connected to pushbuttons, switches, or be configured as outputs to activate individual signaling LEDs (eelectron code LD00A01ACC / LD00A11ACC) and can be used for on / off, dimming, shutters or venetian blinds / scenarios, sequences, stepby-step commands, etc. 4 inputs (of the 16) are configurable as analogue for the connection of NTC temperature probes (see probes eelectron code TS00A01ACC / TS00B01ACC) with which to send 4 temperature measurements on the bus and manage a simple on / off controls (e.g. thermo furniture). It is also possible to enable 2 complete thermostat modules if inputs 3 ÷ 8 and 11 ÷ 16 are not used; each thermostat module manages 2 stages with integrated PI controller for driving heating and cooling equipment, valves, 2 and 4-pipe fan coils, etc. Version IO16F01KNX-SD includes a microSD card reader includes a microSD card reader with which you can save the programming of the device to be able to restore it on an identical device in order to avoid programming in field or to allow a fast restore in case of failure.

Technical Features

| Mechanical data | Dimensions: 8 DIN modules |
|---|--|
| Supply | Via EIB/KNX bus cable: 21 ÷ 32V DC Max 10 ÷ 30 mA (ETS parameter) |
| Input - digital mode | For free potential contacts (dry contacts) Max. length of Connecting Cables ≤ 30 m (twisted cable) |
| Input - analog mode for temperature probe | For NTC temperature probe eelectron code: TS01A01ACC (range from -20°C to +100°C) TS01B01ACC (range from -50°C to +60°C) TS01D01ACC (range from -40°C to 125°C) Max. length of Connecting Cable: ≤ 20 m (twisted cable) |
| Output rate | 16 A cos φ 1 - 230V AC 8 A cos φ 0.6 - 230V AC Max current relay output: 16 A/16 AX (140 μF) Max peak current: 165 A / 20 ms Incandescent lamps: max 10 A Motors e motor reduction units: max 10 A Fluorescent lamps (max 140 μF) max 3 A (700 W) Electronic ballast: max 6 A LED's lamps drivers: always check that the maximum peak current drawn by led power supply is lower than maximum peak current allowed for the relay |

| | | | - | 00 | 0 | 00 | 9 | | 0 | | |
|-----|---------|--------------------|--------|-------------|---------|--------------|-----|-----|----------------|--------|---|
| | - KNX + | | | 6 0 C N1 | Ø N2 | | | | 0 NS | | |
| • | | | | 9 | 10 | () 11 | 12 | | 14 | 6 151 | 6 |
| 8 | | | | • • | | • • | | • • | | • ^ | |
| | 1 | MODULE 16IN /16OUT | tron | | | | | | | | Ŕ |
| 001 | | | | - | - | - | - | - | - | - | - |
| |) | | | | - | | - | 0 5 | 6 | 07 | |
| | | IO16F01KNX-SD | | • - | | • • | | • • | | • • | |
| | 00 | | • | | | | ۲ | | • • | | |
| | OUT 9 | OUT 10 | OUT 11 | - | T 12 | OUT 13 | 0.0 | - | OUT 15 | OUT 15 | |
| | CC | | 00 | 0 | Ø | 00 | Ø | A | 00 | | S |

• 4 outputs for light / load control

- 4 channels for valve in PWM (solenoid actuators)
- 2 channels for roller shutter / venetian control
- 2 channels for 3-point valve control
- 1 fan coil actuators 2-pipes

that can be configured as:

Version BO04F01KNX-SD includes a microSD card reader with which you can save the programming of the device to be able to restore it on an identical device in order to avoid programming in field or to allow a fast restore in case of failure.

Order Codes

IO16F01KNX Universal Actuator 16 IN / 16 OUT Plus

IO16F01KNX-SD Universal Actuator 16 IN / 16 OUT + SD Card

Technical Features

| Mechanical data • Dimensions: 4 DIN modules Supply • Via EIB/KNX bus cable: 21 ÷ 32V DC • Max 10 ÷ 30 mA (ETS parameter) Output rate • 16 A cos φ 1 - 230V AC • 8 A cos φ 0.6 - 230V AC • Max current relay output: 16 A/16 AX (140 µ) Max peak current: 165 A / 20 ms • Incandescent lamps: max 10 A • Fluorescent lamps (max 140 µF) max 3 A (70) • Electronic ballast: max 6 A • LED's lamps drivers: always check that the m peak current drawn by led power supply than maximum peak current allowed for t | | |
|---|-----------------|---|
| • Max 10 ÷ 30 mA (ETS parameter) • 16 A cos φ 1 - 230V AC • 8 A cos φ 0.6 - 230V AC • Max current relay output: 16 A/16 AX (140 μ • Max peak current: 165 A / 20 ms • Incandescent lamps: max 10 A • Motors e motor reduction units: max 10 A • Fluorescent lamps (max 140 μ F) max 3 A (70) • Electronic ballast: max 6 A • LED's lamps drivers: always check that the m peak current drawn by led power supply | Mechanical data | Dimensions: 4 DIN modules |
| 8 A cos φ 0.6 - 230V AC Max current relay output: 16 A/16 AX (140 μ Max peak current: 165 A / 20 ms Incandescent lamps: max 10 A Motors e motor reduction units: max 10 A Fluorescent lamps (max 140 μF) max 3 A (70) Electronic ballast: max 6 A LED's lamps drivers: always check that the m peak current drawn by led power supply | Supply | |
| | Output rate | 8 A cos φ 0.6 - 230V AC Max current relay output: 16 A/16 AX (140 μ) Max peak current: 165 A / 20 ms Incandescent lamps: max 10 A Motors e motor reduction units: max 10 A Fluorescent lamps (max 140 μF) max 3 A (70) Electronic ballast: max 6 A LED's lamps drivers: always check that the m peak current drawn by led power supply |





Device BO04F01KNX is a DIN rail EIB / KNX actuators with 4 relay outputs



Order Codes

BO04F01KNX Universal Actuator 4 OUT Plus

BO04F01KNX - SD Universal Actuator 4 OUT + SD Card

μF)

(W 00

naximum is lower the relay

O eelectror

Universal Module 8 OUT - PLUS - F Series



Device BO08F01KNX is a DIN rail EIB / KNX actuators with 8 relay outputs that can be configured as:

- 8 outputs for light / load control
- 8 channels for valve in PWM (solenoid actuators)
- 4 channels for roller shutter / venetian control
- 4 channels for 3-point valve control
- 2 fan coil actuators 2-pipes

It is also possible to combine 2 or 3 relays with logic interlock for 4-pipe / 3-speed fan coil control or combine groups of relays (up to 8) for special function using logic interlock .

Version BO08F01KNX-SD includes a microSD card reader with which you can save the programming of the device to be able to restore it on an identical device in order to avoid programming in field or to allow a fast restore in case of failure.

| OUT 1 | OUT 2 | | OUT 4 |
|-------------|-------|------------|-------|
| OUTS | | OUT7 | |
| 6 50 | 0^ v | | ~ • |
| • | | F01KNX-SI | (|
| | | MODULE SOU | Ŕ |
| e | | | |
| PROG. | 0.0 | | |
| - KNX + | | | |
| - KNY + | | | |

Universal Module 12 OUT - PLUS - F Series

OUTPUTS

Device BO12F01KNX is a DIN rail EIB / KNX actuators with 16 relay outputs that can be configured as:

- 12 outputs for light / load control
- 12 channels for valve in PWM (solenoid actuators)
- 6 channels for roller shutter / venetian control
- 6 channels for 3-point valve control
- 3 fan coil actuators 2-pipes / 2 fan coil actuators 4-pipes

It is also possible to combine 2 or 3 relays with logic interlock for 4-pipe / 3-speed fan coil control or combine groups of relays (up to 6) for special function using logic interlock.

Version BO12F01KNX-SD includes a microSD Card reader includes a microSD card reader with which you can save the programming of the device to be able to restore it on an identical device in order to avoid programming in field or to allow a fast restore in case of failure.

• Dimensions: 6 DIN modules

• 16 A cos φ 1 - 230V AC • 8 A cos φ 0.6 - 230V AC

• Electronic ballast: max 6 A

• Via EIB/KNX bus cable: 21 ÷ 32V DC

• Max 10 ÷ 30 mA (ETS parameter)

• Max peak current: 165 A / 20 ms Incandescent lamps: max 10 A

Motors e motor reduction units: max 10 A

| Technical F | eatures | Order Codes | Technical F | eatures |
|-----------------|--|---|-----------------|--|
| Mechanical data | • Dimensions: 4 DIN modules | BO08F01KNX Universal Actuator 8 OUT Plus | Mechanical data | Dimensior |
| Supply | Via ElB/KNX bus cable: 21 ÷ 32V DC Max 10 ÷ 30 mA (ETS parameter) | BO08F01KNX - SD Universal Actuator 8 OUT + SD Card | Supply | Via EIB/KN Max 10 ÷ 5 |
| Output rate | 16 A cos φ 1 - 230V AC 8 A cos φ 0.6 - 230V AC Max current relay output: 16 A/16 AX (140 μF) Max peak current: 165 A / 20 ms Incandescent lamps: max 10 A Motors e motor reduction units: max 10 A Fluorescent lamps (max 140 μF) max 3 A (700 W) Electronic ballast: max 6 A LED's lamps drivers: always check that the maximum peak current drawn by led power supply is lower than maximum peak current allowed for the relay | | Output rate | 16 A cos q 8 A cos q Max curre Max peak Incandesc Motors e Fluoresce Electronic LED's lam peak curr than max |





Order Codes

BO12F01KNX Universal Actuator 12 OUT Plus

BO12F01KNX - SD Universal Actuator 12 OUT + SD Card

• Max current relay output: 16 A/16 AX (140 µF)

• Fluorescent lamps (max 140 µF) max 3 A (700 W)

• LED's lamps drivers: always check that the maximum peak current drawn by led power supply is lower than maximum peak current allowed for the relay

O eelectron

Universal Module 16 OUT - PLUS - F Series



Device BO16F01KNX is a DIN rail EIB / KNX actuators with 16 relay outputs that can be configured as:

- 16 outputs for light / load control
- 16 channels for valve in PWM (solenoid actuators)
- 8 channels for roller shutter / venetian control
- 8 channels for 3-point valve control
- 4 fan coil actuators 2-pipes

Mechanical data

Supply

Output rate

It is also possible to combine 2 or 3 relays with logic interlock for 4-pipe / 3-speed fan coil control or combine groups of relays (up to 8) for special function using logic interlock .

Version BO16F01KNX-SD includes a microSD Card reader includes a microSD card reader with which you can save the programming of the device to be able to restore it on an identical device in order to avoid programming in field or to allow a fast restore in case of failure.

| 1. | | 16F01KNX-S | | - | 1 | | |
|--------|---|------------|-------|---|---|-------------------|---|
| 8 |) | | | | | 6 5 6 | |
| DORESS | | | | | | | |
| | | DULE 16OUT | ctron | | | | Ŕ |
| UN C | | | | | | • • • • • 1314 | |
| | | | | | | | |

Universal Module 24 OUT - PLUS - F Series

Device BO24F01KNX is a DIN rail EIB / KNX actuators with 16 relay outputs that can be configured as:

- 24 outputs for light / load control
- 24 channels for valve in PWM (solenoid actuators)
- 12 channels for roller shutter / venetian control
- 12 channels for 3-point valve control
- 6 fan coil actuators 2-pipes / 4 fan coil actuators 4-pipes

It is also possible to combine 3,4 or 5 relays with logic interlock for 4-pipe / 3-speed fan coil control or combine groups of relays (up to 6) for special function using logic interlock .

Version BO24F01KNX-SD includes a microSD Card reader includes a microSD card reader with which you can save the programming of the device to be able to restore it on an identical device in order to avoid programming in field or to allow a fast restore in case of failure.

Technical Features • Dimensions: 8 DIN modules • Via EIB/KNX bus cable: 21 ÷ 32V DC • Max 10 ÷ 30 mA (ETS parameter) • 16 A cos φ 1 - 230V AC

- 8 A cos φ 0.6 230V AC
- Max current relay output: 16 A/16 AX (140 µF)
- Max peak current: 165 A / 20 ms Incandescent lamps: max 10 A
- Motors e motor reduction units: max 10 A
- Fluorescent lamps (max 140 µF) max 3 A (700 W)
- Electronic ballast: max 6 A
- LED's lamps drivers: always check that the maximum peak current drawn by led power supply is lower than maximum peak current allowed for the relay

Order Codes

BO16F01KNX Universal Actuator 16 OUT Plus

BO16F01KNX - SD Universal Actuator 16 OUT + SD Card

Technical Features

Ν

| Max peak current: 165 A / 20 ms Incandescent lamps: max 10 A Motors e motor reduction units: max 10 A Fluorescent lamps (max 140 µF) max 3 A (7 Electronic ballast: max 6 A LED's lamps drivers: always check that the r peak current drawn by led power supply | | |
|---|-----------------|---|
| Max 10 ÷ 30 mA (ETS parameter) Output rate 16 A cos φ 1 - 230V AC 8 A cos φ 0.6 - 230V AC Max current relay output: 16 A/16 AX (140 Max peak current: 165 A / 20 ms Incandescent lamps: max 10 A Motors e motor reduction units: max 10 A Fluorescent lamps (max 140 μF) max 3 A (7 Electronic ballast: max 6 A LED's lamps drivers: always check that the r peak current drawn by led power supply | Mechanical data | Dimensions: 12 DIN modules |
| 8 A cos φ 0.6 - 230V AC Max current relay output: 16 A/16 AX (140 Max peak current: 165 A / 20 ms Incandescent lamps: max 10 A Motors e motor reduction units: max 10 A Fluorescent lamps (max 140 μF) max 3 A (7 Electronic ballast: max 6 A LED's lamps drivers: always check that the r peak current drawn by led power supply | Supply | |
| | Output rate | 8 A cos φ 0.6 - 230V AC Max current relay output: 16 A/16 AX (140 μl Max peak current: 165 A / 20 ms Incandescent lamps: max 10 A Motors e motor reduction units: max 10 A Fluorescent lamps (max 140 μF) max 3 A (700 μF) |



| | | | | ~~• | | | | • • • • | |
|-----------|--|--|---|-------|------|----|------------------|-----------|-------------------------|
| | | | • | 1 2 | •••• | | © 7 * O BO24F | | O 11/12 O |
| Accession | | | | | | | MOON | ALE DADAT | |
| • | | | : | 10 14 | | | 0 ~ ~ 0 | | |
| - | | | | | | aa | | | |

Order Codes

BO24F01KNX Universal Actuator 12 OUT Plus

BO24F01KNX - SD Universal Actuator 12 OUT + SD Card

μF)

(W 00

naximum is lower the relay

Universal Module $4 \text{ OUT} - \mathbf{K}$ Series



The device BO04K01KNX is a DIN actuator with 16A - 230 V AC relay outputs for controlling loads or shutters and blinds, it has 4 relay outputs and they can be configured in different ways:

- Every single output configured independently to control lights or generic loads
- Outputs configured in pairs to manage shutters, blinds, etc. .. (equipped with mechanical end position)

8 logic blocks are available to implement simple expressions with logical or threshold operator or complex expressions with algebraic and conditional operators Device is equipped with KNX communication interface.



Universal Module 8 OUT - K Series

OUTPUTS

The device BO08K01KNX is a DIN actuator with 16A - 230 V AC relay outputs for controlling loads or shutters and blinds. It has 8 relay outputs and they can be configured in different ways:

- Every single output configured independently to control lights or generic loads
- Outputs configured in pairs to manage shutters, blinds, etc. .. (equipped with mechanical end position)

8 logic blocks are available to implement simple expressions with logical or threshold operator or complex expressions with algebraic and conditional operators Device is equipped with KNX communication interface

| Technical Features | | Order Codes | Technical Features | | | |
|--------------------|--|--|--------------------|---|--|--|
| Mechanical data | Dimensions: 4 DIN modules | BO04K01KNX Universal Actuator 4 OUT | Mechanical data | Dimensions: 6 DIN modules | | |
| Supply | Via EIB/KNX bus cable: 21 ÷ 32V DC Max 10 mA | | Supply | Via EIB/KNX bus cable: 21 ÷ 32V DC Max 10 mA | | |
| Output rate | 16 A cos φ 1 - 230V AC 8 A cos φ 0.6 - 230V AC Max current relay output: 16 A cos φ 1 - 250V AC Max peak current: 117 A (TV-8 rating) Incandescent lamps: max 5 A Motors e motor reduction units: max 3 A Tungsten: max 8 A Electronic ballast: max 8 A LED's lamps drivers: always check that the maximum peak current drawn by led power supply is lower than maximum peak current allowed for the relay | | Output rate | 16 A cos φ 1 - 230V AC 8 A cos φ 0.6 - 230V AC Max current relay output: 16 A cos φ 1 - 250V AC Max peak current: 117 A (TV-8 rating) Incandescent lamps: max 5 A Motors e motor reduction units: max 3 A Tungsten: max 8 A Electronic ballast: max 8 A LED's lamps drivers: always check that the maxim peak current drawn by led power supply is low than maximum peak current allowed for the reduction of th | | |





Order Codes

BO08K01KNX Universal Actuator 8 OUT

AC

kimum lower relay

Universal Module 12 OUT - K Series



The device BO12K01KNX is a DIN actuator with 16A - 230 V AC relay outputs for controlling loads or shutters and blinds. It has 12 relay outputs and they can be configured in different ways:

- Every single output configured independently to control lights or generic loads
- Outputs configured in pairs to manage shutters, blinds, etc. .. (equipped with mechanical end position)

8 logic blocks are available to implement simple expressions with logical or threshold operator or complex expressions with algebraic and conditional operators Device is equipped with KNX communication interface



Shutters module 4 OUT - DC Motor Controller 12-24V



The device has 4 channels for controlling Venetian blinds or shutters. Therefore, up to 4 drives for Venetian blinds, shutters or other shading devices powered by 24 V AC DC can be controlled. An each channel, status objects can be assigned that signal the current position or the 'up' and 'down' end position (track). Parameters define the travel time for the up and down movement and for the opening of slats or louvers for roller shutters. Based on these parameters, blinds and shutters can be precisely controlled. Venetian blind/shutter channels can be integrated into the interior module for façade control. Additional objects are available for the corresponding façade control up/down, position and slat position. In addition, Venetian blind/shutter channels can be integrated into additional functions of the application module.

Installed on the standard 35 mm DIN rail and has a width of 4 DIN modules. All channels are supplied with an external voltage of 24 V DC AC. The channel outputs control the two up/down travel directions. The device is connected to the KNX bus via the standard bus connector.

| Technical Features | | Order Codes | Technical Features | | |
|--------------------|--|---|--------------------|--|--|
| Mechanical data | Dimensions: 8 DIN modules | BO12K01KNX Universal Actuator 12 OUT | Mechanical data | • Dimensions: 5 DIN modules | |
| Supply | Via ElB/KNX bus cable: 21 ÷ 32V DC Max 10 mA | | Supply | Via EIB/KNX bus cable: 21 ÷ 32V DC Max 9,5 mA | |
| Output rate | 16 A cos φ 1 - 230V AC 8 A cos φ 0.6 - 230V AC Max current relay output: 16 A cos φ 1 - 250V AC Max peak current: 117 A (TV-8 rating) Incandescent lamps: max 5 A Motors e motor reduction units: max 3 A Tungsten: max 8 A Electronic ballast: max 8 A LED's lamps drivers: always check that the maximum peak current drawn by led power supply is lower than maximum peak current allowed for the relay | | Output rate | 4 outputs for DC shutter control and/or 4 AC with separated supply inputs Motor 24V DC AC Maximum switching capacity per output: 6A / 24 | |





Order Codes

SA04K01KNX Shutters modules 4 OUT - DC Motor Controller 12-24V

C motor

24V DC

DIN Modules 8 OUT 20A WITH CURRENT SENSORS



The KNX current sensing actuator 20A is a DIN modules with 8 relay outputs of 20A - 230 V AC for controlling lights or generic loads.

The outputs can be configured in different ways:

• Every single output configured independently to control lights or generic loads for a total of 8 outputs.

• It is possible to combine groups of relays (up to 8) for special functions with logic interlocking.

The KNX current sensing actuator 20A has an integrated "current sensing" function which allows to measure the current of each relay output with the "true RMS" method (RMS = Root-Mean-Square value).

Two current thresholds can be set; when the value of the first threshold is exceeded, a warning function will be activated; when the second (higher) threshold value is exceeded, the alarm function which provides for the opening of the relay is activated.

Moreover, 8 logic blocks are available to implement simple expressions with logical or threshold operator or complex expressions with algebraic and conditional operators.

| • | | | • | |
|---------------------|----------|------------------------------------|----|--|
| Veelectron Place | BO08S01K | NX MODULE BOUT WITH CURRENT SENSOR | RS | |

DIN Modules 8 OUT 20A



The KNX DIN module 20A actuator is a DIN module with 8 relay outputs of 20A - 230 V AC for controlling lights or generic loads.

The outputs can be configured in different ways:

• Every single output configured independently to control lights or generic loads for a total of 8 outputs.

• It is possible to combine groups of relays (up to 8) for special functions with logic interlocking.

Moreover, 8 logic blocks are available to implement simple expressions with logical or threshold operator or complex expressions with algebraic and conditional operators.

Contact us for more information about the KNX DIN module 20A actuator.

| Technical Features | | Order Codes | Technical Fea | atures | |
|--------------------|--|--|-----------------|--|--|
| Mechanical data | Dimensions: 8 modules DIN | BO08S01KNX | Mechanical data | Dimensions: 8 modules DIN | |
| Supply | Via EIB/KNX bus 21 ÷ 32 V DC Max 12 mA | Universal DIN Module 8 OUT 2 current sensors | Supply | Via EIB/KNX bus 21 ÷ 32 V Max 12 mA | |
| Outputs | • Max current relay output: - AC1 ($\cos \phi \ 0.8$) 20 A/230±10% - AC1 ($\cos \phi \le 0.8$) 16 A/230 ±10% • Max. peak current: 500A/2ms • Resistive load: 20A 230V AC ±10% • Incandescent lamps: 16A 230V AC ±10% • Motor: 10A 230V AC ±10% • Fluorescent lamp: 10A 230V AC ±10% • Minimum mechanical switching number: 1 x 10 ⁶ | | Uscite a relè | Max current relay output: AC1 (cos φ 0.8) 20 A/2304 AC1 (cos φ ≤ 0.8) 16 A/23 Max. peak current: 500A/2n Resistive load: 20A 230V AC Incandescent lamps: 16A 23 Motor: 10A 230V AC ±10% Fluorescent lamp: 10A 230\ Minimum mechanical switch | |

OUTPUTS





Order Codes

BO08S02KNX Universal DIN Module 8 OUT 20A

1 x 10⁶

O eelectron

Universal **Dimmer** 1 CHANNEL 700 W - MASTER AND SLAVE



DM01D01KNX is a KNX power dimmer 1-channel acting as a Master Dimmer to which you can connect up to two Slave Modules (cod. DM01D01ACC) with identical characteristics to the Master power dimmer and connected to it by a local two wires bus.

Dimmer DM01D01KNX can be used in one of the following configurations: Trailing Edge: The dimmer turns off part of the final part of the waveform of the input voltage resulting in reduced lamp output. This load regulation is used for resistive or capacitive loads (typically halogen lamps with electronic transformer or incandescent lamps).

Leading Edge: The dimmer turns off part of the initial part of the waveform of the input voltage, resulting in reduced lamp output. This load regulation is used for inductive loads (typically ferromagnetic transformers or toroidal).

The three channels are independent and can therefore operate on different phases of the same three phase systems respecting the limit of 230V AC between phase and neutral.

| | R C & 🛞 II) L |
|----------------------------|----------------|
| O eelectron M01 D01 KNX | |
| Deele | сом ок * •* |
| | PROG. Address: |



Universal **Dimmer** 2 CHANNELS X 300 W



DM02A02KNX is a KNX universal power dimmer 2 channels with automatic identification of load type and with settable parameters to optimize control of different lamps like LED, incandescent and halogen, CFL dimmable lights, low voltage lamps with electronic or ferromagnetic transformer.

The 2 channels can be used independently or combined in pair to drive higher power loads; always respect the maximum power values indicated in the table of this instruction sheet and check in the handbook how to configure the outputs as combined in ETS. To define the maximum load and in particular the maximum number of lamps that can be connected, the DimmerLoadTester software is available; with it is possible to analyze the peak absorption of a single lamp and calculate the maximum number of lamps that can be connected.

Load control is possible in leading and trailing edge.

| Technical Features | | | |
|--------------------|--|--|--|
| Mechanical data | Dimensions: 4 DIN modules | | |
| Supply | Via EIB/KNX bus cable: 21 ÷ 32V DC, max 10 mA Input power supply: 230V AC 50/60 Hz | | |
| Connections | Power supply & load cable: max 2,5 mm² Local bus length: max 2 m between 2 modules | | |
| Output rate | Incandescent or halogen lamps: 20-700 W Ferromagnetic transformer 20-700 VA Electronic transformer: 20-700 VA Dimmable LED Lamps: Max 160 W Compact fluorescent lamps (ESL/CFL): Max 160 W | | |

| Or | der | Codes | , |
|----|-----|-------|---|
| | | | |

DM01D01KNX Universal Dimmer 1 Channel 700 W Master

DM01D01ACC Universal Dimmer 1 Channel 700 W Slave

Technical Features

| Mechanical data | Dimensions: 4 DIN modules | | |
|-----------------|--|--------|--|
| Supply | Via EIB/KNX bus cable: 21 ÷ 32V DC, max 10 Input power supply: 230V AC 50/60 Hz | | |
| Output rate | | Single | |
| | Incandescent or halogen lamps (230 V~ 50/60 Hz) 300 W 600 W RC LIN | 300 W | |
| | Ferromagnetic transformer (Halogen lamps 12/24 V ~ 50/60 Hz) 200 VA 400 VA L (1) LIN | 200 VA | |
| | Electronic transformers (Halogen lamps 12/24 V ~ 50/60 Hz) | 60 VA | |
| | Dimmable LED lamps (230 V~ 50/60 Hz) - L | 60 W | |
| | Dimmable LED lamps (230 V~ 50/60 Hz) - RC | 120 W | |
| | Compact Fluorescent Lamps (ESL/CFL) | 60 W | |





DM02A02KNX 300 W) mA Paired 600 W 400 VA 100 VA 100 W 200 W 100 W

Order Codes

Universal DIN Dimmer 2 Channels x

O eelectron

Universal **Dimmer** 4 CHANNELS X 300 W



DM04A02KNX is a KNX universal power dimmer 4-channels with automatic identification of load type and with settable parameters to optimize control of different lamps like LED, incandescent and halogen, CFL dimmable lights, low voltage lamps with electronic or ferromagnetic transformer.

The 4 channels can be used independently or combined in pair (1+2 and 3+4) to drive higher power loads; always respect the maximum power values indicated in the table of this instruction sheet and check in the handbook how to configure the outputs as combined in ETS. To define the maximum load and in particular the maximum number of lamps that can be connected, the DimmerLoadTester software is available; with it is possible to analyze the peak absorption of a single lamp and calculate the maximum number of lamps that can be connected.

Load control is possible in leading and trailing edge.

| DM04A02KNX UNIVERSAL DIMMER 4CH | 8 LD1 ● | 8 LD1 ● | : LD1 ● | 2 LD1 ● | |
|------------------------------------|------------------|----------|-------------------|---------|---|
| — | S1 | S1 | S1 | S1 | |
| | LD2 | LD: | LD2 | LD: | E |
| | * 52 | * 52 | * 🔊 🔍 | * 52 🔍 | |
| ACORESS | SET LOAD | ND AC O | _ • ∗ ou r | | |
| • • | 51 51 (5 mc.) | COM OK * | | | |
| PROG. | L Mosupe | | | | |

Dimmer Led 4 CHANNELS



DL04A02KNX is a dimming actuator for LED in DC with constant voltage (CV).

The device allows to drive 4 independent channels or 1 RGB channel and 1 single color channel or 1 channel RGBW.

It is possible to enable the notification mode of the correct functionality of the device via a communication object Module can be powered from 12 to 48V DC and consequently can manage the outputs (LED strips) with voltage from 12 to 48V DC.

The maximum current for each channel is 6A. The device includes a 16A relay, suitable for switching capacitive loads, that allows a complete shutdown of the external power supply when all loads are switched off (for example at night) ensuring the maximization of the energy saving. It is mandatory to connect one of the external power supply cables to the relay.

In case of an anomaly of the outputs, the device automatically excludes the external power supply and the device stops working. On the front pane there are 4 local switching buttons with corresponding status LED and a LED for signalling faults: over-temperature, power connection with reversed polarity, insufficient auxiliary power supply voltage.

| Technical Features | | | | |
|--------------------|---|--------|--------|--|
| Mechanical data | Dimensions: 8 DIN modules | | | |
| Supply | Via ElB/KNX bus cable: 21 ÷ 32V DC, max 10 mA Input power supply: 230V AC 50/60 Hz | | | |
| Output rate | | Single | Paired | |
| | Incandescent or halogen lamps (230 V~ 50/60 Hz) 300 W 600 W RC LIN | 300 W | 600 W | |
| | Ferromagnetic transformer (Halogen lamps 12/24 V ~ 50/60 Hz) 200 VA 400 VA L (1) LIN | 200 VA | 400 VA | |
| | Electronic transformers (Halogen lamps 12/24 V ~ 50/60 Hz) | 60 VA | 100 VA | |
| | Dimmable LED lamps (230 V~ 50/60 Hz) - L | 60 W | 100 W | |
| | Dimmable LED lamps (230 V~ 50/60 Hz) - RC | 120 W | 200 W | |
| | Compact Fluorescent Lamps (ESL/CFL) | 60 W | 100 W | |

Order Codes

DM04A02KNX Universal DIN Dimmer 4 Channels x 300 W

| Technical Features | | | |
|--------------------|--|--|--|
| Mechanical data | • Dimensions: 4 modules DIN | | |
| Supply | Via bus EIB/KNX cable 21 ÷ 32V DC, max 5 mA AUX input to supply LED's 12 ÷ 48 V DC ± 109 Current Consumption AUX ≤ 24A | | |
| Output rate | • Frequency PWM: 200 / 260 / 400 Hz | | |
| Protection | Overcurrent Overtemperature Polarity reversal | | |

DIMMER





Order Codes

A

DL04A02KNX Dimmer led DIN 4 channels RGB -White



DIMMER

Dimmer 4 CHANNELS X 1-10 V



DM04D01KNX is a KNX 4 channel dimmer with switching and brightness setting for lamps with operating devices with 1-10 V interface.

- Manual switching of the relays is independent of the Bus
- Switching of capacitive loads and the resulting high switchon currents
- Flexible assignment of control inputs to switching outputs, e.g. to control **RGBW** lamps
- · Operation of the switching outputs as a switching actuator
- Connection of various external conductors
- No additional power supply necessary
- Feedback of switching state and brightness value
- Switch position display
- Burnin function for fluorescent lamps
- Switchon and dimming behaviour can be set
- Time functions: switchon delay, switchoff, delay, staircase lighting timer with run-on time
- Integration into light scenes
- Operating hours counter

| Technical Features | | | |
|--------------------|--|--|--|
| Mechanical data | Dimensions: 4 DIN modules | | |
| Supply | Via ElB/KNX bus cable: 21 ÷ 32V DC Max 6 mA | | |
| Output rate | Fluorescent lamps 16 AX Minimum switching current 100 mA Switch on current 150 µs 600 A Switch on current 600 µs 300 A Ohmic load 3680 W Capacitive load 16 A / 200 µF Incandescent lamps 3680 W HV halogen lamps 3680 W LV halogen lamps with inductive transformer 2000 VA LV halogen lamps with Tronic transformer 2500 W Fluorescent lamps T5/T8 uncompensated 3680 W Parallel compensated 2500 W / 200 µF Compact fluorescent lamps uncompensated 3680 W Parallel compensated 2500 W / 200 µF Mercury vapour lamps uncompensated 3680 W Parallel compensated 3680 W / 200 µF | | |



Heating Actuator 4 IN / 4 OUT



The HA04A01KNX device is a EIB/KNX DIN rail actuators for electrothermal valves with 4 Triac outputs at 24 ÷ 230V AC; the devices include 4 inputs for dry (potential-free) contacts. The outputs can be configured as:

- 4 channels for valve control in ON / OFF or PWM
- 2 channels for 3-points valve control

Inputs can be connected to buttons or switches (potential-free) and can be used for on / off commands, dimming, shutters or blinds / scenarios, sequences, step commands, etc. Inputs from 1 to 4 can be configured as outputs to activate single signalling LEDs (see eelectron leds code LD00A01ACC / LD00A11ACC) or can be configured as analogue inputs for the connection of NTC temperature probes (see eelectron probes code TS00A01ACC / TS00B01ACC) with which to send 4 temperature measurements on the bus or to manage 4 complete thermostat modules. Each thermostat module manages 2 stages with an integrated PI controller for controlling heating and cooling equipment, valves, 2 and 4 pipe fan coils, etc. Additional 4 thermostat modules are available in the device for a total of 8. Moreover, 8 logic blocks are available to implement simple expressions with logical/threshold operator or complex expressions with algebraic and conditional operators; It's possible to use predefined algorithms as proportional controls of temperature and humidity or dew point calculation.

Device is equipped with KNX communication interface and is intended for installation on DIN rail in LV distribution cabinets.

| Technical Features | | |
|--|---|--|
| Mechanical data | Dimensions: 4 DIN Modules | |
| Supply | Via EIB/KNX bus cable: 21 ÷ 32V DC Max 10 mA | |
| Input - digital mode | For free potential contacts (dry contacts) Max. length of Connecting Cables ≤ 30 m (twister) | |
| Input - analog mode for temperature probe | For NTC temperature probe eelectron code: • TS01A01ACC (range from -20°C to +100°C) • TS01B01ACC (range from -50°C to +60°C) • TS01D01ACC (range from -40°C to 125°C) • Max. length of Connecting Cable: ≤ 30 m (twister) | |
| Output rate - triac | • 24 ÷ 230V AC 50/60 Hz | |

Order Codes

DM04D01KNX 4 Channels x 1-10 V



Order Codes

HA04A01KNX Actuator for Electrothermal Valves 4 Inputs / 4 Outputs

ted cable)

ed cable)

O)eelectron

CLIMATE CONTROL

Heating Actuator 8 IN / 8 OUT



The HA08A01KNX device is a EIB/KNX DIN rail actuators for electrothermal valves with 8 Triac outputs at 24 ÷ 230V AC; the devices include 8 inputs for dry (potential-free) contacts. The outputs can be configured as:

- 8 channels for valve control in ON / OFF or PWM
- 4 channels for 3-points valve control

Inputs can be connected to buttons or switches (potential-free) and can be used for on / off commands, dimming, shutters or blinds / scenarios, sequences, step commands, etc. Inputs from 1 to 4 can be configured as outputs to activate single signaling LEDs (see eelectron leds code LD00A01ACC / LD00A11ACC) or can be configured as analogue inputs for the connection of NTC temperature probes (see eelectron probes code TS00A01ACC / TS00B01ACC) with which to send 4 temperature measurements on the bus or to manage 4 complete thermostat modules. Each thermostat module manages 2 stages with an integrated PI controller for controlling heating and cooling equipment, valves, 2 and 4 pipe fan coils, etc. Additional 4 thermostat modules are available in the device for a total of 8. Moreover, 8 logic blocks are available to implement simple expressions with logical/threshold operator or complex expressions with algebraic and conditional operators; It's possible to use predefined algorithms as proportional controls of temperature and humidity or dew point calculation.

Device is equipped with KNX communication interface and is intended for installation on DIN rail in LV distribution cabinets.

(500 600 ● * OUT OHAO

Valves / Loads Actuator 8 IN / 4 + 4 OUT



The HA88B01KNX device is EIB/KNX DIN rail actuator with 16 A - 230V AC relay outputs; the device also include inputs for dry contacts (potentialfree).

The outputs can be configured as:

- 4 outputs for light / load control
- 8 (4) channels for valve control in ON / OFF or PWM
- 4 (2) channels for 3-points valve control
- 1 fan coil actuators 2-pipes with 3 speeds
- 1 fan coil actuators 4-pipes with 3 speeds

Inputs from 1 to 4 can be configured as outputs to activate single signaling LEDs (see eelectron leds code LD00A01ACC / LD00A11ACC) or can be configured as analogue inputs for the connection of NTC temperature probes (see eelectron probes code TS00A01ACC / TS00B01ACC) with which to send 4 temperature measurements on the bus or to manage 4 complete thermostat modules.

Each thermostat module manages 2 stages with an integrated PI controller for controlling heating and cooling equipment, valves, 2 and 4 pipe fan coils, etc. Additional 4 thermostat modules are available in the device for a total of 8. Moreover, 4 logic blocks are available to implement simple expressions with logical/threshold operator or complex expressions with algebraic and conditional operators; It's possible to use predefined algorithms as proportional controls of temperature and humidity or dew point calculation. Device is equipped with KNX communication interface and is intended for installation on DIN rail in LV distribution cabinets.

Technical Features


| Mechanical data | Dimensions: 4 DIN modules | | |
|--|--|--|--|
| Supply | Via EIB/KNX bus cable: 21 ÷ 32V DC Max 15 mA | | |
| Input - digital mode | For free potential contacts (dry contacts) Max. length of Connecting Cables ≤ 30 m (twisted) | | |
| Input - analog mode for temperature probe | For NTC temperature probe eelectron code: • TS01A01ACC (range from -20°C to +100°C) • TS01B01ACC (range from -50°C to +60°C) • TS01D01ACC (range from -40°C to 125°C) • Max. length of Connecting Cable: ≤ 30 m (twisted) | | |
| Output rate - triac | • 24 ÷ 230V AC 50/60 Hz | | |
| Output rate - relay | 16 A cos φ 1 - 230V AC 8 A cos φ 0.6 - 230V AC Max current relay output: 16 A/16 AX (140 μF) Max peak current: 165 A / 20 ms Incandescent lamps: max 10 A Motors e motor reduction units: max 10 A Fluorescent lamps (max 140 μF) max 3A (700) Electronic ballast: max 6 A LED's lamps drivers: always check that the ma peak current drawn by led power supply is than maximum peak current allowed for the | | |

| Technical Features | | |
|--|---|--|
| Mechanical data | Dimensions: 4 DIN Modules | |
| Supply | Via ElB/KNX bus cable: 21 ÷ 32V DC Max 15 mA | |
| Input - digital mode | For free potential contacts (dry contacts) Max. length of Connecting Cables ≤ 30 m (twisted cable) | |
| Input - analog mode for temperature probe | For NTC temperature probe eelectron code: • TS01A01ACC (range from -20°C to +100°C) • TS01B01ACC (range from -50°C to +60°C) • TS01D01ACC (range from -40°C to 125°C) • Max. length of Connecting Cable: ≤ 30 m (twisted cable) | |
| Output rate - triac | • 24 ÷ 230V AC 50/60 Hz | |

Order Codes

HA08A01KNX Actuator for Electrothermal Valves 8 Inputs / 8 Outputs





Order Codes

HA88B01KNX Valves / Loads Actuator 8 IN / 4 + 4 OUT

ed cable)

ed cable)

W)

aximum is lower he relay



Fan Coil Controller 0-10V



The Fan Coil Unit Controller is used to control fan coil units, floor heating or switch actuators. Depending on the design of the device, fan coil units are used in 2-pipe or 4-pipe systems. It controls up to 3 fan speeds (Relay or 0- 10V ±5% outputs) as well as heating or cooling valves (Proportional or electrothermal valve) respectively. The mode of control is based on twostep control or a time- discrete PI controller with setpoint/actual value comparison. The valves and the fan can be regulated directly by devices via the closed loop of this controller. When the Fan Coil Unit Controller is used in floor heating, it can control up to seven channel. All of the floor heating channel control is used a time-discrete PI controller with setpoint / actual value comparison.

The following functions can be set in different functions:

- 1. Five channel 10A relay outputs
- 2. Two channel 0-10V ±5% DC outputs
- 3. Fan speed: High, Medium, Low
- 4. HVAC working mode: Heating, Cooling
- 5. HVAC op. mode: Standby, Comfort, Night, Frost protection
- 6. Fan speed and Valve status report
- 7. Seven local temperature sampling
- 8. BUS temperature sampling
- 9. Local temperature report
- 10.Seven channel floor heating outputs
- 11. Five control mode each floor heating channel
- 12. Seven channel output independently
- 13.Channel statistics total ON time
- 14.Channel state response
- 15.Channel state after bus voltage failure and recovery
- 16.Staircase light
- 17.Delay
- 18.PWM control output

Device is intended to be installed on DIN rail in cabinet for low voltage distribution

| Technical Fe | Order Codes | |
|-------------------|---|---------------------|
| Mechanical data | • Dimensions: (A x L x P): 90 x 72 x 66 mm | TC17B01KNX |
| Supply | Via EIB/KNX bus 21 30V DC | Fan Coil Controller |
| | • Max 20 mA | |
| Temperature Input | Local sensor digital sensor, max 7 sensors, max cable length 50m Via KNX 1 or 2 group object | |
| Outputs | 5 relays outputs 10 A cos φ 1 - 230 V AC 2 analog ouputs 0-10V ±5% DC 10mA / channel | |



Fan Coil Controller Plus

Universal Fancoil Controller Plus 4 X 0-10 V | 5 IN - 3 OUT

The TC57B01KNX device is a DIN rail EIB / KNX actuator for fan coil control with 4 x 0-10 V outputs and 3x16 A relays. Two 0-10 V outputs are dedicated to proportional valves, variable fan speeds can be controlled with a third 0-10 V output or with 3 relays on board. If the 3 relays are not used for speeds, they can switch lights or other loads. An analogue input (IN 5) is also available for reading 0-10 V or 4-20 mA signals in order to interface temperature, humidity or CO₂ probes; the fourth 0-10 V output can also be configured as analog input. Five digital inputs are available for dry contact reading for the connection of buttons, window contacts, alarms; Two inputs can be connected to NTC temperature probes (eelectron codes TS00A01ACC and TS00B01ACC).

The internal logic can manage a 2-4 tube fan coil with an internal 2-stage PI algorithm. A sophisticated parameterization allows its use in modern systems that require a differentiation of the behaviour between speed and valves (independent regulation differentials), ventilation to avoid air stratification, logics for efficient maintenance of comfort and energy saving.

Technical Features

| Mechanical data | Dimensions: 6 DIN modules |
|---|--|
| Supply | Via EIB/KNX bus cable: 21 ÷ 32V DC Max 20 mA |
| Input - digital mode | For free potential contacts (dry contacts) Max. length of Connecting Cables ≤ 30 m (twister) |
| Input - analog mode for temperature probe | For NTC temperature probe eelectron code: • TS01A01ACC (range from -20°C to +100°C) • TS01B01ACC (range from -50°C to +60°C) • TS01D01ACC (range from -40°C to 125°C) • Max. length of Connecting Cable: ≤ 30m (twister) |
| Input - analog mode for general purpose | • 0 - 10 V / 4 - 20 mA |
| Output rate - relay | 16 A cos φ 1 - 230V AC 8 A cos φ 0.6 - 230V AC Resistive load: max 16 A Incandescent lamps: max 8 A Fluorescent lamps (max 140 μF) max 3 A (70 |
| Output rate - analog mode for general purpose | • 0 - 10 V, max 2.5 mA |





Order Codes


TC57D01KNX Universal Fan Coil Controller Plus 4 X 0-10 V | 5 IN - 3 OUT

ed cable)

ed cable)

(W 00

Fan Coil Controller





The TC57A01KNX device is a DIN rail EIB / KNX actuator for fan coil control with 3 x 0-10 V outputs and 3x16 A relays. Two 0-10 V outputs are dedicated to proportional valves, variable fan speeds can be controlled with a third 0-10 V output or with 3 relays on board. If the 3 relays are not used for speeds, they can switch lights or other loads. An analogue input is also available for reading 0-10 V or 4-20 mA signals in order to interface temperature, humidity or CO₂ probes; the third 0-10 V output can also be configured as analog input. Five digital inputs are available for dry contact reading for the connection of buttons, window contacts, alarms; Two inputs can be connected to NTC temperature probes (eelectron codes TS00A01ACC and TS00B01ACC).

The internal logic can manage a 2-4 tube fan coil with an internal 2-stage PI algorithm. A sophisticated parameterization allows its use in modern systems that require a differentiation of the behaviour between speed and valves (independent regulation differentials), ventilation to avoid air stratification, logics for efficient maintenance of comfort and energy saving.



Motorized valve drive



The device VD21A01KNX is a motorized valve drive for heating or cooling valves: Screw onto valve head. The valve drive is matched to standard valve base types using an M30×1.5 connection. In the basic setting, the valve drive fits the valve bases of make Heimeier. Adapters must be used for valve bases of other manufacturers. No function guarantee can be accepted for this.

Product characteristics

- Integrated temperature sensor
- Room temperature control
- Mechanical display of the valve stroke
- Automatic detection of the valve stroke
- An input, which can be used as a binary input
- Use in heating circuit distributor possible
- Integrated bus coupling unit
- Valve protection function

| Technical Features | | Order Codes |
|---|--|---|
| Mechanical data | Dimensions: 6 DIN modules | TC57A01KNX Universal Fan Coil Controller |
| Supply | Via EIB/KNX bus cable: 21 ÷ 32V DC Max 20 mA | 3 X 0-10 V 5 IN - 3 OUT |
| Input - digital mode | For free potential contacts (dry contacts) Max. length of Connecting Cables ≤ 30 m (twisted cable) | |
| Input - analog mode for temperature probe | For NTC temperature probe eelectron code: • TS01A01ACC (range from -20°C to +100°C) • TS01B01ACC (range from -50°C to +60°C) • TS01D01ACC (range from -40°C to 125°C) • Max. length of Connecting Cable: ≤ 30m (twisted cable) | |
| Input - analog mode for general purpose | • 0 - 10 V / 4 - 20 mA | |
| Output rate - relay | 16 A cos φ 1 - 230V AC 8 A cos φ 0.6 - 230V AC Resistive load: max 16 A Incandescent lamps: max 8 A Fluorescent lamps (max 140 μF) max 3 A (700 W) | |
| Output rate - analog mode for general purpose | • 0 - 10 V, max 2.5 mA | |

Technical Features Mechanical data • L×A×H 76×47×85 mm

• Max 20 mA

Supply

Connecting cable

 Cable length: 1 m • Total length per line: 30 m

• Number of drives per line: 30

• Cable type: J-YY 1×2×0,6 mm

• Via EIB/KNX bus cable: 21 ÷ 32V DC

Connection cable, • Poll voltage, extension inputs: approx. 3,3 V binary input/ Cable length: 10 m remote sensor

- Single stranded: 0.08 ... 1.5 mm² • Finely stranded without conductor sleeve: 0,08 mm² ...
- 1,0 mm²
- Finely stranded with conductor sleeve: 0,14 mm² ... 0,5 mm²







VD21A01KNX Motorized valve drive



CLIMATE CONTROL

Analog / Digital Interface ANALOG / DIGITAL MODULE 8 INPUT 4 LED OUTPUT - 4 THERMOSTATS



AD84C01KNX module includes 4 digital inputs to interface dry contacts and 4 analog or digital inputs for dry contacts or temperature sensors and 4 LED outputs. Digital inputs can interface sensors, traditional buttons, etc; 4 low voltage/current outputs can drive LED for synoptics panels or switches. Inputs 5 \div 8, set as analog inputs, can enable up to 4 temperature probes (with On/Off threshold) or 4 thermostats to control heating and cooling equipments, valves, 2 and 4 pipes fan coils; etc. Device is equipped with KNX communication interface.



Push Button Interface 2 IN - 2 OUT LED / 4 IN - 4 OUT LED / 6 IN - 2 OUT LED

The device is dedicated to interface dry contacts with 2,4 or 6 input channels, such as sensors, conventional push buttons and 2 or 4 low voltage/current output channels to drive LED signal indicator lamps. These devices are extremely compact size (only 34 x 34 x 11 mm) and can also be used in installations where the inwall space available is reduced.

The digital inputs can interface sensors, traditional buttons, etc; the 4 lowvoltage output channels can drive LEDs for synoptic panels or switches. Outputs can drive low voltage LED; if possible use high-efficiency LED Eelectron cod. LD00A01ACC (blue color) or LD00A11ACC (white color).

There are also 8 blocks of logic functions freely configurable by ETS (6 blocks available on IO62D01KNX). Device is equipped with KNX communication interface.

| Technical Fe | eatures | Order Codes |
|--|---|---|
| Mechanical data | • Dimensions: (H x W x D) : 43 x 36 x 24 mm | AD84C01KNX |
| Mounting | • Inwall | Analog / Digital Module 8 Inp Output - 4 Thermostats |
| Supply | Via EIB/KNX bus cable: 21 ÷ 32V DC Max 10 mA | |
| Input - digital mode | For free potential contacts (dry contacts) Max. length of Connecting Cables ≤ 30 m (twisted cable) | |
| Input - analog mode for temperature probe | For NTC temperature probe eelectron code: • TS01A01ACC (range from -20°C to +100°C) • TS01B01ACC (range from -50°C to +60°C) • TS01D01ACC (range from -40°C to 125°C) • Max. length of Connecting Cable: ≤ 30 m (twisted cable) | |
| Output rate - LED | For LED use Eelectron LED code: • LD00A01ACC / LD00A11ACC) 0.5 mA / 3.3 V | |

put - 4 Led

| Technical Features | | |
|-------------------------|---|--|
| Mechanical data | • Dimensions: (H x W x D) : 34 x 34 x 11 mm | |
| Mounting | • Inwall | |
| Supply | Via EIB/KNX bus cable: 21 ÷ 32V DC Max 5 mA | |
| Input - digital mode | For free potential contacts (dry contacts) Max. length of Connecting Cables ≤ 30 m (twisted) | |
| Output rate - LED | For LED use Eelectron LED code: • LD00A01ACC / LD00A11ACC 0.5 mA / 3.3 V | |
| | | |











Order Codes

IO22D01KNX Push Button interface inwall 2 in - 2 led out module

IO44D01KNX Push Button interface inwall 4 in - 4 led out module

IO62D01KNX Push Button interface inwall 6 in - 2 led out module

IOxxD01ACC Accessory - DIN rail mounting for push-button interfaces IOXXD01KNX

O eelect

GATEWAY

DMX Gateway KNX - DMX



Interface between KNX bus and DMX512 bus. Combines devices for building automation with control devices dedicated to lighting and special effects. One-way gateway that receives telegrams from the KNX bus and data bus to DMX512. Scenarios of all 512 channels can be configured and managed with KNX group addresses.



Order Codes

IC00B01DMX Gateway KNX-DMX GATEWAY

DALI Gateway KNX - DALI - 2 CHANNELS



The DALI Gateway is an interface between a KNX installation and a DALI lighting system (Digital Addressable Lighting Interface).

The DALI Gateway allows the switching and dimming of a maximum of 64 lights with a DALI operating device (e.g. electronic ballast). Up to 6 different addressing types of the DALI Gateway allow group orientated and individually-address control of DALI lights via KNX telegrams. This allows the integration of room-specific light controls, for example, of open-plan offices, multipurpose spaces, production facilities, training and conference rooms into the higher-level of KNX building management.

Depending on the configuration, up to 32 independent DALI groups are available for group addressing. For alternative control, these can be supplemented with 64 individually-addressable DALI device channels, as necessary. Optionally, master control of all connected DALI components is possible (broadcast).

This means that there is no need to commission DALI, the lighting systems with few functions can be started up quickly and easily (simplified configuration without DALI commissioning).

The DALI Gateway is supplied completely via the mains voltage connection and makes the DALI system voltage (typically 16V DC) available. The device is designed for mounting on DIN rails.

Technical Features

| Mechanical data | Dimensions: 4 DIN modules |
|-----------------|--|
| Supply | Power supply Operating voltage 100 to 240 V, 50 to 60Hz AC or D0 Maximum power consumption 9 W Bus KNX Bus power supply via KNX bus line SELV 24 V, ca. 5 to Bus DALI DALI voltage: typic. 18 V DC, short-circuit proof max.250 mA, basic insulation (no SELV) Recommended wire cross-section: min. 1.5 mm² Guaranteed supply current: 160 mA Maximum su current: 250 mA |
| DALI | Number of outputs: 2 DALI output Output type: Single-Master Application Control according to EN 62386-103 ed 2 Number of ballasts: max. 64 ECGs (x2) accord EN 62386-101 ed1 and ed 2 DALI voltage: typic. DC, short-circuit proof max.250 mA, basic insula (no SELV) Shutdown delay: 600 ms after DALI short circuit shutdown occurs Start-up attempt after shutdown: 5 s after sho circuit detection |

Technical Features

| Mechanical data | • Dimensions: 6 DIN modules |
|-----------------|---|
| Supply | Via EIB/KNX bus cable: 21 ÷ 32V DC Auxiliary supply: 9-30V DC, 100 mA, separated |
| Output | • DMX / RS485 bus |





DC

mΑ

supply

ller

ding to . 18 V ation

ıit

ort-



Order Codes

IC02D01DAL Gateway KNX DALI TW 2 CH

O eelectron

GATEWAY

GATEWAY

KNX DALI Gateway TW - 1 CH KNX - DALI



The DALI Gateway IC01D01DAL is a single master application controller for controlling electronic ballasts with DALI interface (in accordance with EN 62386) via the KNX installation bus.

The device transforms switch and dim commands from the connected KNX system into DALI telegrams and status information from the DALI bus into KNX telegrams. The IC01D01DAL is equipped with one DALI output and 64 ECGs can be controlled, individually or in up to 16 DALI groups.



| Technical Features | | |
|--------------------|---|--|
| Mechanical data | Dimensions: 4 modules DIN | |
| Supply | Power supply Operating voltage 100 to 240 V, 50 to 60Hz AC or DC Maximum power consumption 9 W Bus KNX Bus power supply via KNX bus line SELV 24 V, ca. 5 mA Bus DALI DALI voltage: typic. 18 V DC, short-circuit proof max.250 mA, basic insulation (no SELV) Recommended wire cross-section: min. 1.5 mm² Guaranteed supply current: 160 mA Maximum supply current: 250 mA | |
| DALI | Number of outputs: 1 DALI output Output type: Single-Master Application Controller according to EN 62386-103 ed 2 Number of ballasts: max. 64 ECGs according to EN 62386-101 ed1 and ed 2 DALI voltage: typic. 18 V DC, short-circuit proof max.250 mA, basic insulation (no SELV) Shutdown delay: 600 ms after DALI short circuit shutdown occurs | |

• Start-up attempt after shutdown: 5 s after short-

circuit detection

Order Codes

IC01D01DAL KNX DALI Gateway TW - 1 CH

Gateway KNX DALI-2 1CH MULTIMASTER



The IC01D03DAL Gateway is a multi-master application controller for controlling electronic ballasts with DALI interface via the KNX installation bus. It supports ballasts according to EN 62386-102 ed1 (DALI), devices according to EN 62386-102 ed2 (DALI-2), as well as DALI-2 motion sensors and light sensors according to EN 62386-303 and EN 62386-304 and generic inputs (ie.: temperature, humidity, etc..) The device transforms switching and dimming commands from the connected KNX system into corresponding DALI telegrams, or status and event information from the DALI bus into KNX telegrams. With the DALI Gateway, it is also possible to implement constant light control directly via the connected DALI-2 sensors. With constant light control, the light value measured by the sensor is compared with the desired setpoint value and the lighting level is automatically adjusted to the setpoint value. The IC01D03DAL has a DALI output which can control up to 64 ECGs. The ECGs can be controlled in 16 groups. In addition, up to 8 DALI-2 motion detectors or light sensors can be connected, up to a maximum of 8 DALI buttons (4 channels per device) and up to 8 generic DALI inputs (physical quantities) can be integrated as per IEC 62386 standard. Multi-master operation according to EN 62386-103 ed2 is permitted. The required power supply for the connected ECGs and motion sensors is provided directly from the device. Additional DALI power sup-plies are not required. When using sensors supplied via the DALI bus, it must be ensured that the current consumption of all connected DALI devices does not exceed the guaranteed value. In addition to the control of all standard operating devices, the IC01D03DAL also allows the operation of single battery emergency lights (IEC 62386-202). Emergency lighting systems with central battery are also supported. The device is available in a 4TE wide DIN rail housing for direct installation in an electrical distribution board. The bus connection is made via a standard bus connector. Mains and DALI lines are connected via screw terminals on the de-vice. Ethernet is connected via an RJ45 socket. The commissioning of the device is implemented directly on the device, via integrated web server or in the ETS5 (DCA).

Technical Features

| Mechanical data | Dimensions: 4 DIN modules |
|-----------------|--|
| Supply | Power supply Operating voltage 100 to 240 V, 50 to 60Hz AC or D Maximum power consumption 8 W Bus KNX Bus power supply via KNX bus line SELV 24 V, ca. 5 Bus DALI DALI voltage: typic. 18 V DC, short-circuit proof max.250 mA, basic insulation (no SELV) Recommended wire cross-section: min. 1.5 mm² Guaranteed supply current: 160 mA Maximum s current: 250 mA |
| Connectors | Mains connector L N PE: Screw connector 3x 1-2 mm² single or threaded core Screw connector 2x 1-2.5 mm² single or threaded Bus line: Bus connector KNX, screwless 0.60.8 single core Ethernet Eth 1: RJ-45 plug connector for standard cables |





DC

5 mA

n2 supply

2.5

ed core 8 mm,

rd patch





Order Codes

IC01D03DAL KNX DALI-2 gateway - 1 channel multi master application controller, MQTT GATEWAY

Gateway KNX BACnet

Product with ETS application expressly designed for projects with KNX-TP devices (and DALI via the appropriate gateway) that require an additional connection to the supervision and/or BACnet IP devices (Client) with the possibility of bidirectional data exchange.

The ETS application allows BACnet objects with CoV or ReadyProperty etc. functionality to be configured as required and in a simplified form. For example, it can quickly connect a BACnet object whose 'instance number' is identical to the object number in ETS. Diagnostic functions supporting supervisory management are also implemented. Off/on objects are translated as binary, while others become analogue objects (Input, Output, Value).

A total of 250 objects are available / selectable for configuration, a size that meets the needs of small or zone-managed installations or when supervision requires some of the data managed by field automation via KNX. The ETS application is flanked by a Web Server to display the configuration and status of the objects, which allows direct verification and testing of the configuration and commissioning. Finally, the device has implemented a KNX IP interface so that it can be used during ETS programming.

It has a pluggable terminal block for 24V AC/DC power supply connection KNX connection with bus terminal and RJ45 connector for Ethernet connection. DIN 4 rail mounting.

| • | • |
|----------|--------------|
| Led | |
| ERR ● | |
| | 8 |
| Veeedron | ŔŇŻ |
| | |
| A6/00 | Burs |
| | 1 1 1 |

| Technical Features | | |
|--------------------------|---|--|
| Mechanical data | • Dimensions: 5 DIN modules | |
| Supply | Via EIB/KNX bus cable: 21 ÷ 32V DC Max 5 mA Auxiliary supply: 24V DC max 40mA | |
| Standard technologies | • KNX • BACnet | |
| Connection mode: | 1xTunnel/1xObject Server | |
| User interface | • Web | |
| BACnet Object | • 250 | |

Order Codes

IC01E01BAC Gateway KNX BACnet



DALI-2

Presence Sensors DALI-2 STANDARD



The DALI-2 STANDARD presence sensor includes a light sensor for controlling ambient lighting and a rear connector with 3 digital inputs that can be connected to pushbuttons, suitable for mounting up to 4 m high.

The following push-button states are managed

- button released, button pressed
- short press, double press
- long-press start
- repeat at long press
- long-press stop
- button released, button locked

NOTE:

The sensor detects the difference between ambient temperature and temperature of moving objects and people; the lower this temperature difference will be, the less sensitive the sensor will be.

To ensure correct coverage of the sensor surveillance area, prevent walls (even glass) or furniture from being an obstacle; if this is not possible increase the number of sensors in the area in order to have a complete coverage.

Always mount the sensor on a stable surface, not subject to vibrations or oscillations that can simulate movement.


Lighting devices placed near the sensor or in the monitored area can cause false readings, avoid this interference as much as possible.

In the coverage area avoid appliances that produce heat such as fan coils, printers, lamps, etc. or objects that can move due to wind or air currents.

Avoid direct sunlight or artificial light radiating the sensor directly.

| Technical Features | | |
|----------------------|--|--|
| Mechanical data | • Dimensions (diameter x height): 81x37 mm | |
| Supply | Via bus cable 9.5 ÷ 22.4V DC Max 10 mA | |
| Connections | • Cabled connector 6 poles with AWG 26 wires L. 100 mm | |
| Input - digital mode | For free potential contacts (dry contacts) Max. length of Cables (twisted): ≤ 10 m Voltage Scanning: 3.3 V DC | |
| Lighting sensor | • Range: 50 ÷ 20000 LUX | |
| Electrical Safety | Degree of protection: IP20 (EN 60529) Bus: safety extra low voltage 9.5 ÷ 22.4V DC Reference standards: EN IEC 63044-3 | |





BASIC - STANDARD - MULTI - SPACE

| h | А | В | С |
|-------|-------|--------|--------|
| 2.5 m | 3.8 m | 7.0 m | 10.0 m |
| 3.0 m | 4.0 m | 8.0 m | 12.0 m |
| 3.5 m | 5.0 m | 9.0 m | 13.0 m |
| 4.0 m | 6.0 m | 11.0 m | 14.0 m |

A | Person working at a desk Person moving towards the sensor C Person moving sideways relative to the sensor

Order Codes

PD00A01DL2-1 DALI-2 presence detector standard with lighting control - White PD00A01DL2-3 DALI-2 presence detector standard with lighting control - Black PD00E00ACC Surface mounting enclosure - White PD00E00ACC-3 Surface mounting enclosure - Black PD00E01ACC Box mounting frame PD00E03ACC Swiss wallbox mounting accessory - White PD00E03ACC-3 Swiss wallbox mounting accessory - Black PD00E06ACC-10 10 m Cable for outputs PD00E08ACC Cable clamp accessory

Presence Sensors MULTI SENSOR DALI-2





The MULTI SENSOR DALI-2 presence sensor includes a brightness sensor for controlling ambient lighting, humidity and temperature sensors with their control algorithms, and a sound sensor that can be used in rooms with parts not fully visible to the infrared sensor. It also includes a rear connector with 3 digital inputs that can be connected to pushbuttons, suitable for mounting up to 4 m high.

- The following push-button states are managed
- button released, button pressed
- short press, double press
- long-press start
- repeat at long press
- long-press stop
- button released, button locked

NOTE:

The sensor detects the difference between ambient temperature and temperature of moving objects and people; the lower this temperature difference will be, the less sensitive the sensor will be. To ensure correct coverage of the sensor surveillance area, prevent walls (even glass) or furniture from being an obstacle; if this is not possible increase the number of sensors in the area in order to have a complete coverage. Always mount the sensor on a stable surface, not subject to vibrations or oscillations that can simulate movement. Lighting devices placed near the sensor or in the monitored area can cause false readings, avoid this interference as much as possible. In the coverage area avoid appliances that produce heat such as fan coils, printers, lamps, etc. or objects that can move due to wind or air currents. Avoid direct sunlight or artificial light radiating the sensor directly.


Technical Features

| Mechanical data | • Dimensions (diameter x height): 81x37 mm | |
|----------------------|--|--|
| Supply | Via bus cable 21÷ 32V DCMax 10 mA | |
| Connections | Cabled connector 6 poles with AWG 26 wires L. | |
| Input - digital mode | For free potential contacts (dry contacts) Max. length of Cables (twisted): ≤ 10 m Voltage Scanning: 3,3 V DC | |
| Lighting sensor | • Range: 50 ÷ 20000 LUX | |
| Temperature sensor | Range: -5 °C + 45 °C • Resolution: 0.1°C Tolerance typ. (max.): ± 0.2°C | |
| Humidity sensor | Range: 0 ÷ 100 %RH • Resolution: 0.1 %RH Tolerance typ. (max.): ± 2 %RH (± 3 %RH) | |
| Electrical Safety | Degree of protection: IP20 (EN 60529) Bus: safety extra low voltage 9,5 ÷ 22,4V DC Reference standards: EN IEC 63044-3 | |



100 mm





BASIC - STANDARD - MULTI - SPACE

| BROID ON THE THE MOET OF TOE | | | |
|------------------------------|-------|--------|--------|
| h | А | В | С |
| 2.5 m | 3.8 m | 7.0 m | 10.0 m |
| 3.0 m | 4.0 m | 8.0 m | 12.0 m |
| 3.5 m | 5.0 m | 9.0 m | 13.0 m |
| 4.0 m | 6.0 m | 11.0 m | 14.0 m |

A | Person working at a desk

B | Person moving towards the sensor

C Person moving sideways relative to the sensor

Order Codes

PD00A02DL2-1 Multisensor DALI-2 - Lighting - Temperature -Humidity - White PD00A02DL2-3 Multisensor DALI-2 - Lighting - Temperature -Humidity - Black PD00E00ACC Surface mounting enclosure - White PD00E00ACC-3 Surface mounting enclosure - Black PD00E01ACC Box mounting frame SM03E01ACC Plugin sensor CO2 + Temperature - White SM03E01ACC-3 Plugin sensor CO2 + Temperature - Black SM03E02ACC Plugin sensor VOC+ eCO2 + Temperature - White SM03E02ACC-3 Plugin sensor VOC+ eCO2 + Temperature - Black PD00E03ACC Swiss wallbox mounting accessory - White PD00E03ACC-3 Swiss wallbox mounting accessory - Black PD00E06ACC-10 10 m Cable for outputs PD00E08ACC Cable clamp accessory

DALI-2

DALI-2 Pushbutton interface 4 INPUT



The DALI-2 button interface integrates up to four conventional light buttons into one DALI channel.

The following button states are managed

- button released
- button pressed
- short press
- double pressure
- long press start
- repeat with long press
- long-press stop
- free button
- button locked

The devices are multi-master compatible.

Order Codes

PB40A01DL2 DALI-2 4 input button interface

| DALI-2/LED interface | Pushbutton |
|----------------------|------------|
| 4 INPUT | |

The PB40A01DL2 interface integrates up to four conventional luminous pushbuttons in a DALI channel and 4 LEDs (cod. LD00A01ACC, LD00A11ACC) that can be powered by connecting the interface to an auxiliary line, reducing consumption on the BUS.

Available LED signalling states:

- LED on: command on
- LED off: command off

The following button states are managed

- button released
- button pressed
- short press
- double pressure
- long press start
- repeat with long press
- long-press stop
- free button
- button locked

The devices are multi-master compatible.

| Technical F | eatures |
|-------------|---------|
|-------------|---------|

| Mechanical data | • 34,7 x 34,7 x 12 mm |
|--------------------------------|--|
| Supply | Via BUS 9,5 ÷ 22,4V DC Max with led off ≤ 6 mA Max with led on ≤ 10 mA Max with led on powered by 24V DC - Ext ≤ 6 |
| Connections | Cabled connector 12 poles with AWG 26 |
| Environmental Specification | Reference standards: EN 50491-2 Operating temperature: 0 °C + 50 °C Storage temperature: - 20 °C + 55 °C Relative humidity (not condensing): max. 90% Installation environment: indoorInstructions |

| Technical Features | | |
|--------------------------------|--|--|
| Mechanical data | • 34,7 x 34,7 x 12 mm | |
| Supply | Via BUS 9,5 ÷ 22,4V DC Max 6 mA | |
| Connections | Cabled connector 12 poles with AWG 26 | |
| Environmental Specification | Reference standards: EN 50491-2 Operating temperature: 0 °C + 50 °C Storage temperature: - 20 °C + 55 °C Relative humidity (not condensing): max. 90% Installation environment: indoorInstructions | |









Order Codes

PB44A01DL2 Button interface DALI-2 4 inputs / 4 leds

6 mA

KNX Basic **Presence** Detector



The BASIC version of Eelectron presence detectors range is suitable for ceiling mounting up to 4 m height.


Presence detection, based on a passive infrared sensor has 5 independently configurable channels with different functions that can be activated.

The device has a rear connector with 3 digital inputs that can be connected to buttons or switches free of potential and used for on / off commands, dimming, shutters or blinds / scenarios, sequences, step commands, etc. One of the 3 inputs can be configured as analogue for the connection of NTC temperature probes (see eelectron probes code TS00A01ACC / TS00B01ACC) with which to send the temperature measurement on the bus.

12 logic blocks are available to implement simple expressions with logical or threshold operator or complex expressions with algebraic and conditional operators.

The device also integrates the "Virtual Holder Logic"; the field of application is the hotel room: through a magnetic sensor installed on the door and connected to a digital input (also to the sensor itself), accurate presence information is managed. The presence detection solution can deduce the presence of people in the room using one or more dedicated sensors. It also detects an unexpected presence and is able to differentiate more behaviors.





Detection range

| BASI | BASIC - STANDARD - MULTI - SPACE | | |
|-------|----------------------------------|--------|--------|
| h | A B | | С |
| 2.5 m | 3.8 m | 7.0 m | 10.0 m |
| 3.0 m | 4.0 m | 8.0 m | 12.0 m |
| 3.5 m | 5.0 m | 9.0 m | 13.0 m |
| 4.0 m | 6.0 m | 11.0 m | 14.0 m |

A | Person working at the desk B | Person moving towards the sensor t to the sensor

| | Person | moving | sideways | with respect | 10 | uie | 50 |
|--|--------|--------|----------|--------------|----|-----|----|
| | | | | | | | |
| | | | | | | | |

| Technical Features | | |
|--|---|--|
| | | |
| Mechanical data | • Dimensions: Ø × H 81 x 37 mm | |
| Mounting | Ceiling mounting, flush-mounted, surface installation | |
| Supply | Via EIB/KNX bus cable: 21 ÷ 32V DC Max 10 mA | |
| Input - digital mode | For free potential contacts (dry contacts) Max. length of Connecting Cables ≤ 30 m (twisted cable) | |
| Input - analog mode for temperature probe | For NTC temperature probe eelectron code: TS01A01ACC (range from -20°C to +100°C) TS01B01ACC (range from -50°C to +60°C) TS01D01ACC (range from -40°C to 125°C) Max. length of Connecting Cable: ≤ 30 m (twisted cable) | |

Order Codes

PD00E00KNX KNX Presence detector Basic

PD00E00KNX-3 KNX Presence detector Basic - Black

PD00E00ACC Surface mounting enclosure

PD00E00ACC-3 Surface mounting enclosure - Black

PD00E01ACC Box mounting frame

PD00E03ACC Swiss box mounting frame - White

PD00E03ACC-3 Swiss box mounting frame - Black

KNX Standard Presence Detector





The STANDARD version of Eelectron presence detectors range is suitable for ceiling mounting up to 4 m height and includes a brightness sensor for environmental lighting control. Presence detection, based on a passive infrared sensor, has 5 independently configurable channels with different functions that can be activated: presence with or without brightness control and with automatic or semi-automatic detection; constant brightness independent or presence dependent with automatic or semi-automatic activation.

The device has a rear connector with 3 digital inputs that can be connected to buttons or switches free of potential and used for on / off commands, dimming, shutters or blinds / scenarios, sequences, step commands, etc. One of the 3 inputs can be configured as analogue for the connection of NTC temperature probes (see eelectron probes code TS00A01ACC / TS00B01ACC) with which to send the temperature measurement on the bus. 12 logic blocks are available to implement simple expressions with logical or threshold operator or complex expressions with algebraic and conditional operators.

The device also integrates the "Virtual Holder Logic"; the field of application is the hotel room: through a magnetic sensor installed on the door and connected to a digital input (also to the sensor itself), accurate presence information is managed. The presence detection solution can deduce the presence of people in the room using one or more dedicated sensors. It also detects an unexpected presence and is able to differentiate more behaviors.

The device manages the ambient lighting based on the measured illuminance; it is also possible to enable the logic called "Circadian Rhythm" with which brightness and color temperature are imposed on the basis of predefined curves or on the basis of the real position of the sun during the day with respect to a terrestrial coordinate.

Technical Features

| Mechanical data | • Dimensions: Ø × H 81 x 37 mm |
|--|--|
| Mounting | Ceiling mounting, flush-mounted, surface inst |
| Supply | Via EIB/KNX bus cable: 21 ÷ 32V DC Max 10 mA |
| Input - digital mode | For free potential contacts (dry contacts) Max. length of Connecting Cables ≤ 30 m (twister) |
| Input - analog mode for temperature probe | For NTC temperature probe eelectron code: • TS01A01ACC (range from -20°C to +100°C) • TS01B01ACC (range from -50°C to +60°C) • TS01D01ACC (range from -40°C to 125°C) • Max. length of Connecting Cable: ≤ 30 m (twister |




tallation

ed cable)

ed cable)





Detection range

BASIC - STANDARD - MULTI - SPACE

| h | А | В | С |
|-------|-------|--------|--------|
| 2.5 m | 3.8 m | 7.0 m | 10.0 m |
| 3.0 m | 4.0 m | 8.0 m | 12.0 m |
| 3.5 m | 5.0 m | 9.0 m | 13.0 m |
| 4.0 m | 6.0 m | 11.0 m | 14.0 m |

A | Person working at the desk

B | Person moving towards the sensor

C Person moving sideways with respect to the sensor

Order Codes

PD00E01KNX KNX Presence detector Standard with lighting control

PD00E01KNX-3 KNX Presence detector Standard with lighting control - Black

PD00E00ACC Surface mounting enclosure

PD00E00ACC-3 Surface mounting enclosure - Black

PD00E01ACC Box mounting frame

PD00E03ACC Swiss box mounting frame - White

PD00E03ACC-3 Swiss box mounting frame - Black **O**eelectron

KNX High Bay Presence Detector WITH LIGHTING CONTROL



The HIGH BAY version of Eelectron presence detectors range is suitable for ceiling mounting up to 16 m height and includes a brightness sensor for environmental lighting control. Presence detection, based on a passive infrared sensor, has 5 independently configurable channels with different functions that can be activated: presence with or without brightness control and with automatic or semi-automatic detection; constant brightness independent or presence dependent with automatic or semi-automatic activation.

The device has a rear connector with 3 digital inputs that can be connected to buttons or switches free of potential and used for on / off commands. dimming, shutters or blinds / scenarios, sequences, step commands, etc. One of the 3 inputs can be configured as analogue for the connection of NTC temperature probes (see eelectron probes code TS00A01ACC / TS00B01ACC) with which to send the temperature measurement on the bus. 12 logic blocks are available to implement simple expressions with logical or threshold operator or complex expressions with algebraic and conditional operators.

The device also integrates the "Virtual Holder Logic"; the field of application is the hotel room: through a magnetic sensor installed on the door and connected to a digital input (also to the sensor itself), accurate presence information is managed. The presence detection solution can deduce the presence of people in the room using one or more dedicated sensors. It also detects an unexpected presence and is able to differentiate more behaviors.

The device manages the ambient lighting based on the measured illuminance; it is also possible to enable the logic called "Circadian Rhythm" with which brightness and color temperature are imposed on the basis of predefined curves or on the basis of the real position of the sun during the day with respect to a terrestrial coordinate.

Technical Features

| Mechanical data | • Dimensions: Ø × H 81 x 37 mm |
|--|---|
| Mounting | Ceiling mounting, flush-mounted, surface installation |
| Supply | Via EIB/KNX bus cable: 21 ÷ 32V DC Max 10 mA |
| Input - digital mode | For free potential contacts (dry contacts) Max. length of Connecting Cables ≤ 30 m (twisted cable) |
| Input - analog mode for temperature probe | For NTC temperature probe eelectron code: • TS01A01ACC (range from -20°C to +100°C) • TS01B01ACC (range from -50°C to +60°C) • TS01D01ACC (range from -40°C to 125°C) • Max. length of Connecting Cable: ≤ 30 m (twisted cable) |

Order Codes

PD00E09KNX KNX High bay presence detector with lighting control

PD00E09KNX-3 KNX High bay presence detector with lighting control - Black

PD00E00ACC Surface mounting enclosure

PD00E00ACC-3 Surface mounting enclosure - Black

PD00E01ACC Box mounting frame

PD00E03ACC Swiss box mounting frame - White

PD00E03ACC-3 Swiss box mounting frame - Black

KNX Multi.Sensor Presence Detector

WITH LIGHTING CONTROL, TEMPERATURE, HUMIDITY, SOUND SENSOR

The MULTI.SENSOR of Eelectron presence detectors range is suitable for ceiling mounting up to 4 m height. The device includes a brightness sensor for environmental lighting control, humidity and temperature sensors with the relative control algorithms and a sound sensor that can be used in rooms with parts not totally visible to the infrared sensor.

Presence detection, based on a passive infrared sensor, has 5 independently configurable channels with different functions that can be activated: presence with or without brightness control and with automatic or semi-automatic detection; constant brightness independent or presence dependent with automatic or semi-automatic activation.

The device has a rear connector with 3 digital inputs that can be connected to buttons or switches free of potential and used for on / off commands, dimming, shutters or blinds / scenarios, sequences, step commands, etc. One of the 3 inputs can be configured as analogue for the connection of NTC temperature probes (see eelectron probes code TS00A01ACC / TS00B01ACC) with which to send the temperature measurement on the bus or manage a complete thermostat module. The thermostat manages 2 stages with an integrated PI controller for controlling heating and cooling equipment, valves, 2 and 4-pipe fan coils, etc.

The humidity sensor manages the measurement of the ambient relative humidity and allows the control with thresholds and hysteresis of humidification and dehumidification equipments.

12 logic blocks are available to implement simple expressions with logical or threshold operator or complex expressions with algebraic and conditional operators. The device also integrates the "Virtual Holder Logic"; the field of application is the hotel room: through a magnetic sensor installed on the door and connected to a digital input (also to the sensor itself), accurate presence information is managed. The presence detection solution can deduce the presence of people in the room using one or more dedicated sensors. It also detects an unexpected presence and is able to differentiate more behaviors. The device manages the ambient lighting based on the measured illuminance; it is also possible to enable the logic called "Circadian Rhythm" with which brightness and color temperature are imposed on the basis of predefined curves or on the basis of the real position of the sun during the day with respect to a terrestrial coordinate.

Technical Features

| Mechanical data | • Dimensions: Ø × H 81 x 37 mm |
|--|--|
| Mounting | Ceiling mounting, flush-mounted, surface instMax 10 mA |
| Supply | Via EIB/KNX bus cable: 21 ÷ 32V DC Max 10 mA |
| Input - digital mode | For free potential contacts (dry contacts) Max. length of Connecting Cables ≤ 30 m (twister) |
| Input - analog mode for temperature probe | For NTC temperature probe eelectron code: • TS01A01ACC (range from -20°C to +100°C) • TS01B01ACC (range from -50°C to +60°C) • TS01D01ACC (range from -40°C to 125°C) • Max. length of Connecting Cable: ≤ 30 m (twister |



Detection range

| h | Ø |
|------|------|
| 5 m | 6 m |
| 12 m | 14 m |
| 16 m | 19 m |






ed cable)

d cable)





BASIC - STANDARD - MULTI - SPACE

| h | А | В | С |
|-------|-------|--------|--------|
| 2.5 m | 3.8 m | 7.0 m | 10.0 m |
| 3.0 m | 4.0 m | 8.0 m | 12.0 m |
| 3.5 m | 5.0 m | 9.0 m | 13.0 m |
| 4.0 m | 6.0 m | 11.0 m | 14.0 m |

A | Person working at the desk

B | Person moving towards the sensor

C | Person moving sideways with respect to the sensor

Order Codes

PD00E02KNX


KNX Presence detector Multi.Sensor lighting control, temperature, humidity, sound sensor PD00E02KNX-3 KNX Presence detector Multi,Sensor lighting control, temperature, humidity, sound sensor - Black PD00E00ACC Surface mounting enclosure PD00E00ACC-3 Surface mounting enclosure - Black PD00E01ACC Box mounting frame SM03E01ACC Plug-in sensor CO₂ + Temperature SM03E01ACC-3 Plug-in sensor CO₂ + Temperature - Black SM03E02ACC Plug-in sensor VOC + eCO_{o} + Temperature - White SM03E02ACC-3 Plug-in sensor VOC + eCO_{a} + Temperature - Black PD00E03ACC Swiss box mounting frame - White PD00E03ACC-3 Swiss box mounting frame - Black

KNX Space Presence Detector WITH LIGHTING CONTROL, TEMPERATURE, HUMIDITY, SOUND SENSOR, UTILIZATION RANGE AND OCCUPANCY

The SPACE sensor of Eelectron presence detectors range is suitable for ceiling mounting up to 4 m height. The device includes a brightness sensor for environmental lighting control, humidity and temperature sensors with the relative control algorithms and a sound sensor that can be used in rooms with parts not totally visible to the infrared sensor. Presence detection, based on a passive infrared sensor, has 5 independently configurable channels with different functions that can be activated: presence with or without brightness control and with automatic or semi-automatic detection; constant brightness independent or presence dependent with automatic or semiautomatic activation. The device has a rear connector with 3 digital inputs that can be connected to buttons or switches free of potential and used for on / off commands, dimming, shutters or blinds / scenarios, sequences, step commands, etc. One of the 3 inputs can be configured as analogue for the connection of NTC temperature probes (see eelectron probes code TS00A01ACC / TS00B01ACC) with which to send the temperature measurement on the bus or manage a complete thermostat module. The thermostat manages 2 stages with an integrated PI controller for controlling heating and cooling equipment, valves, 2 and 4-pipe fan coils, etc. The humidity sensor manages the measurement of the ambient relative humidity and allows the control with thresholds and hysteresis of humidification and dehumidification equipments. 12 logic blocks are available to implement simple expressions with logical or threshold operator or complex expressions with algebraic and conditional operators. The device also integrates the "Virtual Holder Logic"; the field of application is the hotel room: through a magnetic sensor installed on the door and connected to a digital input (also to the sensor itself), accurate presence information is managed. The presence detection solution can deduce the presence of people in the room using one or more dedicated sensors. It also detects an unexpected presence and is able to differentiate more behaviors. The device manages the ambient lighting based on the measured illuminance; it is also possible to enable the logic called "Circadian Rhythm" with which brightness and color temperature are imposed on the basis of predefined curves or on the basis of the real position of the sun during the day with respect to a terrestrial coordinate.

To further integrate presence detection, the **Utilization function** can enable functionalities for mapping space status and related usage/availability i.e. space occupancy and % of utilization rates and can be used to create dashboards, analytics, etc. Moreover, the integrated **Occupancy function** detects useful data for the processing of information related to the intensity of the activity of occupants within the monitored areas allowing the generation of a "heat map" of the building areas.

Technical Features Mechanical data • Dimensions: Ø × H 81 x 37 mm Mounting · Ceiling mounting, flush-mounted, surface installation • Via EIB/KNX bus cable: 21 ÷ 32V DC Supply • Max 10 mA Input - digital • For free potential contacts (drv contacts) • Max. length of Connecting Cables \leq 30 m (twisted cable) mode Input - analog For NTC temperature probe eelectron code: • TS01A01ACC (range from -20°C to +100°C) mode for TS01B01ACC (range from -50°C to +60°C) temperature probe • TS01D01ACC (range from -40°C to 125°C) • Max. length of Connecting Cable: \leq 30 m (twisted cable)



BASIC - STANDARD - MULTI - SPACE

| h | A | В | С | |
|-------|-------|--------|--------|--|
| 2.5 m | 3.8 m | 7.0 m | 10.0 m | |
| 3.0 m | 4.0 m | 8.0 m | 12.0 m | |
| 3.5 m | 5.0 m | 9.0 m | 13.0 m | |
| 4.0 m | 6.0 m | 11.0 m | 14.0 m | |

A | Person working at the desk B | Person moving towards the sensor C | Person moving sideways with respect to the sensor

Order Codes

PD00E03KNX

KNX Presence detector Space - lighting control, temperature, humidity, sound sensor, utilization range and occupancy PD00E03KNX-3 KNX Presence detector Space - lighting control, temperature, humidity, sound sensor, utilization range and occupancy -Black PD00E00ACC Surface mounting enclosure PD00E00ACC-3 Surface mounting enclosure - Black PD00E01ACC Box mounting frame SM03E01ACC Plug-in sensor CO₂ + Temperature SM03E01ACC-3 Plug-in sensor CO₂ + Temperature - Black SM03E02ACC Plug-in sensor VOC + eCO_2 + Temperature - White SM03E02ACC-3 Plug-in sensor VOC + eCO_{2} + Temperature - Black PD00E03ACC Swiss box mounting frame - White PD00E03ACC-3 Swiss box mounting frame - Black

KNX Wide Range Presence Detector WITH LIGHTING CONTROL



The device KNX Wide Range (PD00E20KNX) is an extended range presence and motion sensor suitable for use in indoor environments where a wide range coverage is required. It is equipped with a rear connector with 2 digital inputs that can be connected to potential-free buttons or switches and used for on / off, dimming, rolling shutters or blinds / scenarios, sequences, stepby-step commands, etc. The second input can be configured as analog for the connection of NTC temperature probes (see probes eelectron code TS00A01ACC / TS00B01ACC) to send the temperature measurement on the bus or manage a complete thermostat module. The thermostat manages 2 stages with integrated PI controller for driving heating and cooling equipment, valves, 2 and 4 pipe fan coils, etc.


Presence detection, based on a passive infrared sensor, has 5 independently configurable channels with different functions that can be activated: presence with or without brightness control and with automatic or semi-automatic detection; constant brightness independent or presence dependent with automatic or semi-automatic activation. The PD00E20KNX Wide Range sensor uses 3 distinct sensing elements; by means of the ETS parameterization it is possible to assign different behaviors to the different elements. Moreover, 12 logic blocks are available to implement simple expressions with logical or threshold operator or complex expressions with algebraic and conditional operators; It's possible to use predefined algorithms as proportional controls of temperature and humidity or dew point calculation. The device also integrates the "Virtual Holder Logic" and it is also possible to enable the logic called "Circadian Rhythm".

Technical Features

| Mechanical data | • Dimensions: Ø × H 105 x 66.5 mm |
|--|---|
| Mounting | Ceiling mounting, flush-mounted, surface insta |
| Supply | Via ElB/KNX bus cable: 21 ÷ 32V DC Max 10 mA |
| Input - digital mode | For free potential contacts (dry contacts) Max. length of Connecting Cables ≤ 30 m (twisted) |
| Input - analog mode for temperature probe | For NTC temperature probe eelectron code: • TS01A01ACC (range from -20°C to +100°C) • TS01B01ACC (range from -50°C to +60°C) • TS01D01ACC (range from -40°C to 125°C) • Max. length of Connecting Cable: ≤ 30 m (twisted) |





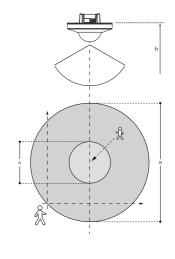

| | h = 2.5 m | P | h = 2.5 m |
|---|-----------|---|-----------|
| A | ø = 7 m | в | ø = 24 m |
| | | | |

A | Person working at the desk B | Person moving towards the sensor

Order Codes

PD00E20KNX

KNX Wide Range Presence detector - lighting control

PD00E05ACC

Surface mounting enclosure

SM03E01ACC Plug-in sensor CO₂ + Temperature

SM03E02ACC

Plug-in sensor VOC + eCO_2 + Temperature - White

ed cable)

ed cable)

KNX Corridor Presence Detector WITH LIGHTING CONTROL





The device KNX Corridor (PD00E21KNX) is an extended range presence and motion sensor for corridors suitable for use in indoor environments where a wide range coverage is required. It is equipped with a rear connector with 2 digital inputs that can be connected to potential-free buttons or switches and used for on / off, dimming, rolling shutters or blinds/scenarios, sequences, step-by-step commands, etc. The second input can be configured as analog for the connection of NTC temperature probes (see probes eelectron code TS00A01ACC / TS00B01ACC) to send the temperature measurement on the bus or manage a complete thermostat module. The thermostat manages 2 stages with integrated PI controller for driving heating and cooling equipment, valves, 2 and 4 pipe fan coils, etc.

Presence detection, based on a passive infrared sensor, has 5 independently configurable channels with different functions that can be activated: presence with or without brightness control and with automatic or semi-automatic detection; constant brightness independent or presence dependent with automatic or semi-automatic activation. The PD00E21KNX Wide Range sensor uses 2 distinct sensing elements; by means of the ETS parameterization it is possible to assign different behaviors to the different elements.

Moreover, 12 logic blocks are available to implement simple expressions with logical or threshold operator or complex expressions with algebraic and conditional operators; It's possible to use predefined algorithms as proportional controls of temperature and humidity or dew point calculation. The device also integrates the "Virtual Holder Logic" and it is also possible to enable the logic called "Circadian Rhythm".

| 600 | |
|-----|--|
| | |
| | |



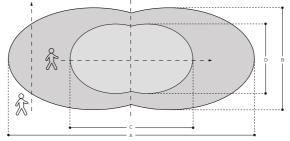

| А | 40 m | В | 5 m |
|---|-------|---|-------|
| h | 2.5 m | h | 2.5 m |
| | | | |
| | | | |
| | | | |
| С | 16 m | D | 3 m |

| Technical Fe | atures |
|--|---|
| Mechanical data | • Dimensions: Ø × H 105 x 66.5 mm |
| Mounting | Ceiling mounting, flush-mounted, surface installation |
| Supply | Via EIB/KNX bus cable: 21 ÷ 32V DC Max 10 mA |
| Input - digital mode | For free potential contacts (dry contacts) Max. length of Connecting Cables ≤ 30 m (twisted cable) |
| Input - analog mode for temperature probe | For NTC temperature probe eelectron code: • TS01A01ACC (range from -20°C to +100°C) • TS01B01ACC (range from -50°C to +60°C) • TS01D01ACC (range from -40°C to 125°C) • Max. length of Connecting Cable: ≤ 30 m (twisted cable) |

Order Codes PD00E21KNX KNX Corridor Presence detector - lighting control PD00E05ACC Surface mounting enclosure SM03E01ACC Plug-in sensor CO₂ + Temperature SM03E02ACC Plug-in sensor VOC + eCO₂ + Temperature - White

Conventional Presence Detector 2 CH. CEILING MOUNTING PIR DETECTOR



The device is a ceiling flush mount PIR detector. The load will be switched on automatically when the movement is detected and the ambient light level is below the Lux setting value. Until there is no movement detected and the pre-set delay time has been expired, load will be switched off automatically. User can pre-set the desired Lux and Time values by VR or IR setting for automatic control lighting on / off with low initial cost and great energy saving potential. Can also be used in many different places for automation control. It can be widely used in home, office, conference room, classrooms, hotel, corridor, underground parking lots, etc.

Technical Features

| Mechanical data | • Dimensions: (H x W x D): 64x80x80 mm |
|--|---|
| Mounting | Ceiling mounting, surface installation |
| Range | Up to Ø12 m at height of 2.5 m Operating temperature: -20° C to +50° C |
| Output rate CH1 - for lighting | Incandescent Lamp: Max. 2000 W AC Halogen Lamp: Max. 1000 W LV Halogen Lamp: Max. 1000 VA / 600 W (trac Max. 1000VA / 900 W (electronics) Fluorescent Lamp: Max. 1000 VA / 600 W (uncompensated) Max. 900 VA / 100 μF 25 x (1 x 18 W); 12 x (2 x 18 W); 15 x (1 x 36 W); 7 x (2 x 36 W); 10 x (1 x 58 W); 5 x (2 x 58 W) LED Lamp : Max. 400 W Energy Saving Lamp: Max. 600 VA / 400 W (in CFL and PL lamp) |
| Output rate CH2 - for Automation Control | • (Lux is invalid): - Max. 5 A ($\cos \varphi = 1$) for 250V AC - Max. 5 A for 30V DC - Max. 1 A ($\cos \varphi = 0.4$) for 250V AC |





Order Codes

PD02X01CON 2 Ch. ceiling mounting PIR detector 230V AC – ø 12m

PD02X01ACC Surface mounting enclosure

aditional

PD02X02CON 2 Ch. ceiling mounting PIR detector 230V AC – ø 24 m

include

SENSORS

Plug In Sensor CO₂ + Temperature



The code SM03E01ACC identifies the accessory of the devices code: PD00E02KNX - KNX MULTI presence detector - lighting, temperature, humidity, sound. PD00E03KNX - KNX Space presence detector- lighting, temperature, humidity, sound , occupancy and utilization. PD00E20KNX - wide range presence detector with lighting control.

PD00E21KNX - presence detector for corridor with lighting control.

This accessory includes a temperature probe (range from -5 $^{\circ}$ C to +50 $^{\circ}$ C) and a CO₂ sensor.



Plug In Sensor VOC + eCO_2 + Temperature

The code SM03E02ACC identifies the accessory of the devices code: PD00E02KNX - KNX MULTI presence detector - lighting, temperature, humidity, sound. PD00E03KNX - KNX Space presence detector- lighting, temperature, humidity, sound , occupancy and utilization. PD00E20KNX - wide range presence detector with lighting control.

PD00E21KNX - presence detector for corridor with lighting control.

This accessory includes a temperature probe (range from -5 $^\circ$ C to + 50 $^\circ$ C) and a CO2 sensor.

| Technical Features | |
|--|---|
| Mechanical data | • Dimensions: Ø × H 81 x 37 mm |
| Mounting | Ceiling mounting, flush-mounted, surface installation |
| Supply | Aux supply: 9 ÷ 32V DC 9 ÷ 24V AC Max 5 mA |
| Input - digital mode | For free potential contacts (dry contacts) Max. length of Connecting Cables ≤ 30 m (twisted cable) |
| Input - analog mode for temperature probe | For NTC temperature probe eelectron code: • TS01A01ACC (range from -20°C to +100°C) • TS01B01ACC (range from -50°C to +60°C) • TS01D01ACC (range from -40°C to 125°C) • Max. length of Connecting Cable: ≤ 30 m (twisted cable) |

Order Codes

SM03E01ACC Plug-in sensor CO₂ + Temperature - White

SM03E01ACC-3 Plug-in sensor CO₂ + Temperature - Black

PD00E00ACC Surface mounting enclosure

PD00E00ACC-3 Surface mounting enclosure - Black

PD00E01ACC Box mounting frame

PD00E03ACC Swiss box mounting frame - White

PD00E03ACC-3 Swiss box mounting frame - Black

Technical Features

| Mechanical data | • Dimensions: Ø × H 81 x 37 mm |
|--|---|
| Mounting | Ceiling mounting, flush-mounted, surface insta |
| Supply | Aux supply: 9 ÷ 32V DC 9 ÷ 24V AC Max 5 mA |
| Input - digital mode | For free potential contacts (dry contacts) Max. length of Connecting Cables ≤ 30 m (twisted) |
| Input - analog mode for temperature probe | For NTC temperature probe eelectron code: • TS01A01ACC (range from -20°C to +100°C) • TS01B01ACC (range from -50°C to +60°C) • TS01D01ACC (range from -40°C to 125°C) • Max. length of Connecting Cable: ≤ 30 m (twisted) |







ed cable)

d cable)

Order Codes

SM03E02ACC Plug-in sensor VOC + eCO_2 + Temperature - White

SM03E02ACC-3 Plug-in sensor VOC + eCO_2 + Temperature - Black

PD00E00ACC Surface mounting enclosure

PD00E00ACC-3 Surface mounting enclosure - Black

PD00E01ACC Box mounting frame

PD00E03ACC Swiss box mounting frame - White

PD00E03ACC-3 Swiss box mounting frame - Black

KNX presence sensor Standard BLE



WITH LIGHT CONTROL

The STANDARD BLE sensor include a brightness sensor for environmental lighting control. Its has a rear connector with 3 digital inputs that can be connected to buttons or switches free of potential and used for on / off commands, dimming, shutters or blinds / scenarios, sequences, step commands, etc.

One of the 3 inputs can be configured as analogue for the connection of NTC temperature probes (see eelectron probes code TS00A01ACC / TS00B01ACC / TS00D01ACC) with which to send the temperature measurement on the bus or manage a complete thermostat module. The thermostat manages 2 stages with an integrated PI controller for controlling heating and cooling equipment, valves, 2 and 4-pipe fan coils, etc.

The device allow integration with the Plug-in wireless door lock system interface (IC01H10DLS) for the detection of door opening / closing data and the management of an automated room KNX. The plug-in can manage up to 8 doors and allows the wiring of the three rear inputs which remain available even if the plug-in is connected to the rear connector.

It also integrate an antenna with BEACON BLE (Bluetooth Low Energy) function. Data format compatible with iBeacon® and Eddystone®The devices allow you to set the transmission frequency and signal strength.

BLE technology allows the sending of messages to mobile devices. These devices must have an app that allows them to retrieve information from BLE beacons.

Presence detection, based on a passive infrared sensor, has 5 independently configurable channels with different functions that can be activated: presence with or without brightness control and with automatic or semi-automatic detection; constant brightness independent or presence dependent with automatic or semi-automatic activation.

Moreover, 12 logic blocks are available to implement simple expressions with logical or threshold operator or complex expressions with algebraic and conditional operators; It's possible to use predefined algorithms as proportional controls of temperature and humidity or dew point calculation.

The device also integrates the "Virtual Holder Logic"; the field of application is the hotel room: through a magnetic sensor installed on the door and connected to a digital input (also to the sensor itself), accurate presence information is managed. The presence detection solution can deduce the presence of people in the room using one or more dedicated sensors. It also detects an unexpected presence and is able to differentiate more behaviors.

The device manages the ambient lighting based on the measured illuminance; it is also possible to enable the logic called "Circadian Rhythm" with which brightness and color temperature are imposed on the basis of predefined curves or on the basis of the real position of the sun during the day with respect to a terrestrial coordinate. This function allows you to recreate lighting comfort in an environment as close as possible to reality. The measurement of lighting in the environment is carried out indirectly and it is therefore necessary to carry out a calibration. The sensor is installed on the ceiling and the detected brightness may differ significantly from that of the work surface; using the ETS software it is possible to set correction parameters for the device basing on a local measurement using the lux meter.

Avoid direct sunlight or artificial light radiating the sensor directly.

| [| |
|---|---|
| Technical Fe | atures |
| Mechanical data | • Dimensions: Ø × H 81 x 37 mm |
| Mounting | Ceiling mounting, flush-mounted, surface installation |
| Supply | Via bus EIB/KNX cable 21÷ 32V DC Max 10 mA Current consumption PD00E1x + IC01H10DLS: ≤ 15 mA |
| Input - digital mode | For free potential contacts (dry contacts) Max. length of Connecting Cables ≤ 30 m (twisted cable) |
| Input - analog mode for temperature probe | For NTC temperature probe eelectron code: TS01A01ACC (range from -20°C to +100°C) TS01B01ACC (range from -50°C to +60°C) TS01D01ACC (range from -40°C to 125°C) Max. length of Connecting Cable: ≤ 30 m (twisted cable) |

KNX presence sensor Space BLE

WITH BRIGHTNESS CONTROL, TEMPERATURE, HUMIDITY, SOUND, USE INDICATOR AND ACTIVITY

The SPACE BLE sensor includes a brightness sensor for environmental lighting control, humidity and temperature sensors with the relative control algorithms and a sound sensor that can be used in rooms with parts not totally visible to the infrared sensor. A rear connector with 3 digital inputs that can be connected to buttons or switches free of potential and used for on / off commands, dimming, shutters or blinds / scenarios, sequences, step commands, etc.

One of the 3 inputs can be configured as analogue for the connection of NTC temperature probes (see eelectron probes code TS00A01ACC / TS00B01ACC / TS00D01ACC) with which to send the temperature measurement on the bus or manage a complete thermostat module. The thermostat manages 2 stages with an integrated PI controller for controlling heating and cooling equipment, valves, 2 and 4-pipe fan coils, etc. The device allow integration with the Plug-in wireless door lock system interface (IC01H10DLS) for the detection of door opening / closing data and the management of an automated room KNX. The plug-in can manage up to 8 doors and allows the wiring of the three rear inputs which remain available even if the plug-in is connected to the rear connector.

It integrate an antenna with BEACON BLE (Bluetooth Low Energy) function. Data format compatible with iBeacon® and Eddystone®The devices allow you to set the transmission frequency and signal strength. BLE technology allows the sending of messages to mobile devices. These devices must have an app that allows them to retrieve information from BLE beacons. The humidity sensor manages the measurement of the ambient relative humidity and allows the control with thresholds and hysteresis of humidification and dehumidification equipments.

The presence detection is based on a passive infrared sensor, it has 5 independently configurable channels with different functions that can be activated: presence with or without brightness control and with automatic or semi-automatic detection; constant brightness independent or presence dependent with automatic or semi-automatic activation. Moreover, 12 logic blocks are available to implement simple expressions with logical or threshold operator or complex expressions with algebraic and conditional operators; It's possible to use predefined algorithms as proportional controls of temperature and humidity or dew point calculation.

The device also integrates the "Virtual Holder Logic"; the field of application is the hotel room: through a magnetic sensor installed on the door and connected to a digital input (also to the sensor itself), accurate presence information is managed. The presence detection solution can deduce the presence of people in the room using one or more dedicated sensors. It also detects an unexpected presence and is able to differentiate more behaviors.

The device manages the ambient lighting based on the measured illuminance; it is also possible to enable the logic called "Circadian Rhythm" with which brightness and color temperature are imposed on the basis of predefined curves or on the basis of the real position of the sun during the day with respect to a terrestrial coordinate. This function allows you to recreate lighting comfort in an environment as close as possible to reality. The measurement of lighting in the environment is carried out indirectly and it is therefore necessary to carry out a calibration. The sensor is installed on the ceiling and the detected brightness may differ significantly from that of the work surface; using the ETS software it is possible to set correction parameters for the device basing on a local measurement using the lux meter. Avoid direct sunlight or artificial light radiating the sensor directly. The SPACE BLE sensor integrates the "Utilization function" which enables functionalities for mapping space status and related usage/availability (eg occupancy index and % of utilization rates) and the "Occupancy function" that detects useful data for the processing of information related to the intensity of the activity of the occupants within the monitored areas (to generate a 'heat map' of the building areas).

Technical Features

| Mechanical data | • Dimensions: Ø × H 81 x 37 mm |
|---|---|
| Mounting | Ceiling mounting, flush-mounted, surface insta |
| Supply | Via EIB/KNX bus 21 ÷ 32V DC Max 10 mA Current consumption PD00E1x + IC01H10DLS: < |
| Input - digital mode | For free potential contacts (dry contacts) Max. length of Connecting Cables ≤ 30 m (twisted) |
| Input - analog mode for temperature probe | For NTC temperature probe eelectron code: • TS01A01ACC (range from -20°C to +100°C) • TS01B01ACC (range from -50°C to +60°C) • TS01D01ACC (range from -40°C to 125°C) • Max. length of Connecting Cable: ≤ 30 m (twisted) |

BASIC - STANDARD - MULTI - SPACE В А С

| 2.5 m | 3.8 m | 7.0 m | 10.0 m | |
|-------|-------|--------|--------|--|
| 3.0 m | 4.0 m | 8.0 m | 12.0 m | |
| 3.5 m | 5.0 m | 9.0 m | 13.0 m | |
| 4.0 m | 6.0 m | 11.0 m | 14.0 m | |

| Person working at desk B | Person moving to sensor C | Person moving sideways relative to sensor

Order Codes

PD00E11KNX KNX Standard BLE presence sensor

PD00E11KNX-3

KNX Standard BLE Presence Sensor - Black

PD00E00ACC Surface-mounting accessory

PD00E00ACC-3 Surface Mounting Accessory - Black


PD00E01ACC Surface Mounting Accessory - Black

PD00E03ACC Swiss Flush Mounting Box Accessory - White PD00E03ACC-3

Swiss Flush Mounting Box Accessory - Black

PD00E07ACC-1 Double square ring mounting accessory - White

PD00E07ACC-3 Double square ring mounting accessory - Black

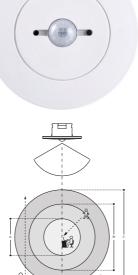








ed cable)

d cable)





BASIC - STANDARD - MULTI - SPACE

| h | А | В | С |
|-------|-------|--------|--------|
| 2.5 m | 3.8 m | 7.0 m | 10.0 m |
| 3.0 m | 4.0 m | 8.0 m | 12.0 m |
| 3.5 m | 5.0 m | 9.0 m | 13.0 m |
| 4.0 m | 6.0 m | 11.0 m | 14.0 m |

A | Person working at desk

B | Person moving to sensor C | Person moving sideways relative to sensor

Order Codes

PD00F13KNX

KNX Space BLE presence sensor with brightness, temperature, humidity, sound sensor, usage and activity index control

PD00E13KNX-3

KNX Space BLE presence sensor with brightness control, temperature, humidity, sound sensor, utilisation and activity index Black

PD00E00ACC Surface mount accessory PD00E00ACC-3 Surface mount accessory - Black PD00E01ACC Flush mount accessory SM03E01ACC Plug-in CO2 + Temperature sensor SM03E01ACC-3 CO2 Plug-in Sensor + Temperature - Black SM03E02ACC Plug-in VOC + eCO2 + T sensor - White SM03E02ACC-3

Plug-in VOC + eCO2 + T sensor - Black PD00E03ACC Swiss flush mount box - White PD00E03ACC-3

Flush mount Swiss box - Black

PD00E07ACC-1 Double square ring mounting bracket - White PD00E07ACC-3 Double square ring mounting accessory -Black

PLUG-IN INTERFACE

Mounting Accessory for Multi.Sensor



Double square ring mounting accessory for PD00ExxKNX and SM range available in black and white.

Plug-in interface FOR LOCK SYSTEMS WIRELESS ELECTRONIC LOCKS



The device can only work if connected to a BLE presence sensor with E-lock interface (PD00E11KNX - PD00E13KNX).

The IC01H10DLS plug-in wireless door lock system interface has three inputs: two digital inputs for dry contacts and an input that can be configured as analog or digital.

The plug-in can manage up to 8 doors and allows the wiring of the three rear inputs to a device of the range of BLE presence sensors with Eelectron E-lock interface for the detection of door opening / closing data and the management of a room automated KNX.



| Technical Features | | |
|--|---|--|
| Mechanical data | • Dimensions: 43 x 36 x 24 mm | |
| Supply | Via PD00E1xKNX 21÷ 32V DC Max 10 mA Current consumption PD00E1x + IC01H10DLS: ≤ 15 mA | |
| Input - digital mode | For free potential contacts (dry contacts) Max. length of Cables (twisted): ≤ 30 m Voltage Scanning: 3,3 V DC | |
| Input - analog mode for temperature probe | For NTC temperature probe eelectron code TS01A01ACC (range from -20°C to +100°C) TS01B01ACC (range from -50°C to +60°C) TS01D01ACC (range from -5°C to +45°C) Max. length of Connecting Cable: ≤ 30 m (twisted cable) | |

Order Codes

IC01H10DLS Plug-in interface for wireless electronic lock systems

Technical Features

Mechanical data

• Dimensions: 180 x 95 mm





Order Codes

PD00E07ACC-1 Double square ring mounting accessory -White

PD00E07ACC-3 Double square ring mounting accessory -Black

ENERGY METER

Energy Meter SINGLE PHASE - MID



The device PM10E02IRE - Single-phase Digital Energy meter - Direct connection 80 A integrates all the measurement functions necessary to monitor a single-phase electrical installation:

• 0.25-5 (80) A, Class B, 230V AC 50 Hz, -25 °C ÷ +55 °C, 4 Quadrants, 2 Tariffs

• Active Energy Class B (according to EN-50470) and Reactive Energy Class 2 (according to IEC 62053-23)

- Direct connected (up to 80 A)
- Backlightet LCD display and 3 push-button keys (to read Energies, V, I, PF, F, P, Q and to configure some parameters)
- Display with 8 digits.
- Self supplied (by the input voltage itself)
- DIN modules width (36 mm)
- 2 Tariffs controlled by a 230V AC digital input
- 2 S0 standard low voltage pulse outputs MID certified





Energy Meter ENERGY METER THREE-PHASE ENERGY METER 80 A - MID



Devices provide all relevant measures for the evaluation of an electrical network: I, U, PF, F, THD%, Powers (displayed for each phase and 3 phase), and Imported/Exported Active/Reactive Energies.

- Direct connection (80 A)
- Current range 0.25-5(80) A
- 2 tariffs and with IR lateral communication available
- 2 S0 Pulse outputs MID certified

Devices are intended to be installed on DIN rail.

Technical Features

| | | Mechanical data | Dimensions: 4 DIN ModulesDimensions: 1 DIN Module |
|-----------------------------------|--|------------------------|--|
| <section-header></section-header> | | Supply | Via EIB/KNX bus cable: 21 ÷ 32V DC Reference voltage Line to Neutral: 230V AC Reference voltage Line to Line: 400V AC Operating supply voltage range: 92 ÷ 276 / 160 |
| | | | 480V AC Reference current 5 A / maximum current 63 A / minimum current 0.25 A starting current 0.015 A Nominal frequency 50 A / frequency range: 45 ÷ 6 Max Power consumption (voltage circuit) ≤2 VA (0) |
| | | Functionality | Connection to three-phase network (4-wires) Tariff for active energy: n° 2 - T1 / T2 |
| | | Overload capability | Voltage: • continuos phase-phase 480V AC • 1 second phase-phase 800V AC • continuos phase-N 276V AC • 1 second phase-N 300V AC Current: • continuous 80 A • 10ms 2400 A |

| Technical Features | | Order Codes |
|------------------------|---|---|
| Mechanical data | Dimensions: 2 DIN Modules (PM10E02IRE) Dimensions: 1 DIN Module (PM00A00IRI) | PM10E02IRE Single-phase Digital Direct connection 80 / |
| Supply | Via EIB/KNX bus cable: 21 ÷ 32V DC Operating supply voltage range: 92 ÷ 276V AC Reference current 5 A / max current 63A / min. current 0.25 A / starting current 0.015 A Nominal frequency 50 Hz / frequency range: 45 ÷ 65 Hz Max Power consumption (voltage circuit) < 2VA (1 W) | PM00A00IRI EIB-KNX interface |
| Functionality | Connection to single-phase network (2-wires) Tariff for active and reactive energy: n° 2 - T1 / T2 | |
| Overload capability | Permanent voltage 276V AC / temporary (1 s) 300V AC Permanent current 63 A / temporary (10 ms) 1890 A | |
| Protective class | Class II | |









Order Codes

PM30E01IRE Three-phase Digital Energy Meter Direct connection 80 A - MID

PM00A00IRI EIB-KNX interface

60 ÷

5 A /

- 65 Hz (0.6 W) **ENERGY** METER

Energy Meter ENERGY METER THREE PHASE WITH EXTERNAL TA 1-5A - MID



Devices provide all relevant measures for the evaluation of an electrical network: I, U, PF, F, THD%, Powers (displayed for each phase and 3 phase), and Imported/Exported Active/Reactive Energies.

- Direct connection (80 A)
- Current range 0.25-5(80) A
- 2 tariffs and with IR lateral communication available
- 2 S0 Pulse outputs MID certified

Technical Features

Devices are intended to be installed on DIN rail.

| Vestedron | M3PF | ID 1-5 MID |
|------------|------------|------------|
| | | |
| CEM 20 005 | GALONIACOM | Secs (|
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| 1 | | |

| Ord | er (| Cod | es |
|-----|------|-----|----|
| | | | |

PM30E02IRE Three-phase Digital Energy Meter with external TA 1-5 A – MID

PM00A00IRI EIB-KNX interface

KNX Time / Astronomical Master

ES01A00KNX is a digital electronic switch for time management of electrical utilities. It allows time programming (daily, weekly or yearly) or astronomical. ES01A00KNX can control 9 different channels on bus KNX. The programming of channel 1 is also replicated on the relay located on the device. Each channel can be associated with a different programming (time or astronomical). ES01A00KNX also offers the possibility of connecting via BUS a GPS module, ES01A00ACC (available as an accessory), which allows the acquisition of the time and the position through the satellite system, ensuring greater accuracy over time. The backup battery allows you to keep the settings even in case of blackout and can be replaced through the cover (sealable).

Technical Features

| Mechanical data | Dimensions: 3 DIN Modules |
|-----------------|---|
| Supply | Via EIB/KNX bus cable: 21 ÷ 32V DC Auxiliary supply: 115 ÷ 230V AC 50/60 Hz |
| Output rate | Capacity at 250V AC 16 A Lamp loads Incandescent lamps 2000 W Fluorescent lamps (compensated) 250 VA Low voltage halogen lamps 11000 VA Halogen lamps at 240 V 2000 W Low consumption lamps (CFL) 200 VA Low consumption lamps (Downlights) 200 LED 25 VA |

| Mechanical data | Dimensions: 4 DIN ModulesDimensions: 1 DIN Module |
|------------------------|--|
| Supply | Via ElB/KNX bus cable: 21 ÷ 32V DC Reference voltage Line to Neutral: 230V AC Reference voltage Line to Line: 400V AC Operating supply voltage range: 92 ÷ 276 / 160 ÷ 480V AC Reference current 1 A / maximum current 6 A / minimum current 0.01 A / starting current 0.001 A Max CT ratio 10000/5 A or 2000/1 A; ratio adjusting step 5 or 1 A Nominal frequency 50 A / frequency range: 45 ÷ 65 Hz Max Power consumption (voltage circuit) ≤2 VA (0.6 W) |
| Functionality | Connection to three-phase network (4-wires) Tariff for active energy: n° 2 - T1 / T2 |
| Overload capability | Voltage: • continuos phase-phase 480V AC • 1 second phase-phase 800V AC • continuos phase-N 800V AC • 1 second phase-N 300V AC Current: • continuous 6 A • 0,5 ms 120 A |







VA

Order Codes

ES01A00KNX KNX time/astronomical master



Order Codes

ES01A00ACC Additional GPS module



Bridge

KNX BRIDGE WITH IP INTERFACE AND KNX+AUX POWER SUPPLY 640MA + MQTTS, KNX SECURE



The IPSBA01KNX device integrates a KNX power supply with auxiliary output with a total current of 640mA, and an IP interface, allowing KNX installations to be implemented quickly and efficiently. Device can be linked to a Cloud platform, through MQTT protocol, and share relevant data detected from connected KNX devices. The voltage of the bus output as well as that of the auxiliary output is 30V DC. The device is compact having a size of only 4 DIN modules. The KNX IP interface allows you to connect a KNX network to an IP backbone; the IP address can be obtained via DHCP server or manually configured via ETS®. The device works in accordance with the KNXnet / IP specifications; up to 5 different IP addresses can be assigned. The device is also a KNX bus node, with its own application program and can be configured with ETS® to communicate using KNX Data Secure protocol. Logic blocks are available to implement simple expressions with logical or threshold operator or complex expressions with algebraic and conditional operators; It's possible to use predefined algorithms as proportional controls of temperature and humidity or dew point calculation. The device also integrates the "Virtual Holder Logic"; the field of application is the hotel room: through a magnetic sensor installed on the door and connected to a digital input (also to the sensor itself), accurate presence information is managed. The presence detection solution can deduce the presence of people in the room using one or more dedicated sensors. It also detects an unexpected presence and is able to differentiate more behaviors. It is also implemented the control logic called "OnLine-OffLine" that checks all KNX TP devices of the subnet connected to the power supply are operating "On Line", alerting the backbone if one of them goes into "Off Line" status. On the device there are pushbuttons and signaling LEDs for bus reset operations as well as for Factory Reset or for displaying activity on the KNX bus and on the IP backbone. The device is intended for installation on DIN bar in LV distribution switchboards.

| Technical Features | | |
|--------------------|--|--|
| | | |
| Mechanical data | • Dimensions: 4 DIN Modules | |
| Supply | • Input voltage: 180264 V AC, 50/60 Hz | |

• Output voltage: DC 30 V (SELV) • Output current: 640 mA (KNX+AUX)

KNX 00 00

3

Order Codes

KNX Bridge with IP interface and KNX-

+AUX power supply 640mA + MQTTs,

IPSBA01KNX

KNX SECURE

SYSTEM COMPONENTS & INTERFACES

Bridge

KNX BRIDGE WITH IP INTERFACE AND KNX+AUX POWER SUPPLY 640MA



The IPSBA02KNX device integrates a KNX power supply with auxiliary output with a a total current of 640mA, and an IP interface, allowing KNX installations to be implemented quickly and efficiently. The voltage of the bus output as well as that of the auxiliary output is 29V DC.

The IP address can be obtained via DHCP server or manually configured via ETS®. The KNX power supply with IP interface works in accordance with the KNXnet / IP specifications; up to 5 different IP addresses can be assigned. The device is also a KNX bus node, with its own application program and can be configured with ETS® to communicate using KNX Data Secure protocol. By enabling the ETS "Other power supplies on the BUS line" parameter, it is possible to install two devices on the same bus line, at a minimum distance of 200 metres.

Moreover, 48 logic blocks are available to implement simple expressions with logical or threshold operator or complex expressions with algebraic and conditional operators; It is possible to use predefined algorithms as proportional controls of temperature and humidity or dew point calculation. The device also integrates the "Virtual Holder Logic"; the field of application is the hotel room: through a magnetic sensor installed on the door and connected to a digital input, accurate presence information is managed. The presence detection solution can deduce the presence of people in the room using one or more dedicated sensors. It also detects an unexpected presence and is able to differentiate more behaviors.

It is also implemented the control logic called "OnLine-OffLine" that checks if KNX TP devices (up to 128) of the subnet connected to the power supply are operating "On Line", alerting the backbone if one of them goes into "Off Line" status.

Technical Features Mechanical data • Dimensions: 4 DIN Modules • Input voltage: 180 ...264 V AC, 50/60 Hz Supply • Output voltage: DC 30 V (SELV) • Output current: 640 mA (KNX+AUX)





Order Codes

IPSBA02KNX

KNX Bridge with IP interface and KNX-+AUX power supply 640mA



Bridge

KNX BRIDGE WITH IP INTERFACE AND POWER SUPPLY KNX + AUX 640MA - KNX SECURE, E-LOCK-IF

The IPSBA03KNX device integrates a KNX power supply with auxiliary output with a a total current of 640mA, and an IP interface, allowing KNX installations to be implemented quickly and efficiently.

The voltage of the bus output as well as that of the auxiliary output is 29V DC. The IP address can be obtained via DHCP server or manually configured via ETS®. The device works in accordance with the KNXnet / IP specifications; up to 5 different IP addresses can be assigned. The device is also a KNX bus node, with its own application program and can be configured with ETS® to communicate using KNX Data Secure protocol. By enabling the ETS "Other power supplies on the BUS line" parameter, it is possible to install two devices on the same bus line, at a minimum distance of 200 metres. The bridge also has an input for wiring an inRoomNode (IRN) module for wireless control of SALTO® locks. Moreover, 48 logic blocks are available to implement simple expressions with logical or threshold operator or complex expressions with algebraic and conditional operators; It is possible to use predefined algorithms as proportional controls of temperature and humidity or dew point calculation. The device also integrates the "Virtual Holder Logic"; the field of application is the hotel room: through a magnetic sensor installed on the door and connected to a digital input, accurate presence information is managed. The presence detection solution can deduce the presence of people in the room using one or more dedicated sensors. It also detects an unexpected presence and is able to differentiate more behaviors. It is also implemented the control logic called "Surveillance" that checks if KNX TP devices (up to 128) of the subnet connected to the power supply are operating "On Line", alerting the backbone if one of them goes into "Off Line" status.

On the device there are pushbuttons and signaling LEDs for bus reset operations as well as for Factory Reset or for displaying activity on the KNX bus and on the IP backbone. There is also a test button for the simulation of the opening/closing of the locks.

The device is compact, with a size of only 4 DIN modules and is intended for installation on DIN bar in LV distribution switchboards.

Technical Features Mechanical data • Dimensions: 4 DIN Modules • Input voltage: 180 ...264 V AC, 50/60 Hz Supply Output voltage: DC 29 V (SELV) • Output current: 640 mA (KNX+AUX)

KNX

Power Supply 640 mA



Power supply for generating bus voltage on a line with a maximum current of 640 mA. With integrated choke to decouple the power supply voltage from the bus. Connection with screw terminals.

Mounting on DIN rails EN 50022. Bus connection via bus terminal.

Technical Features

Mechanical data

Supply

• Input voltage: 180 ÷ 264V AC

• Dimensions: 3 DIN Modules

- Output voltage: Rated voltage 30V DC
- Output current: Rated current 640 mA

Power Supply 640 mA

The power supply unit PS00E03KNX provides the system power necessary for the KNX/EIB bus. The connection to the bus line is via the bus connection block located on the front side. The integrated choke prevents the data telegrams from short-circuiting on the bus line. When the builtin reset button is operated, the bus devices are returned to their initial state. For each bus line, at least one power supply unit PS00E03KNX is needed. Up to two power supply units may be attached to a single bus line. The distance between power supply unit PS00E03KNX and any of its bus devices must not exceed 350 m. The power supply unit PS00E03KNX has a voltage and current regulation and is therefore short-circuit proof. Short power failures can be bridged with a backup interval of approximately 200ms. The power supply unit PS00E03KNX can supply 30V DC power

Technical Features

from an additional pair of terminals.

| Mechanical data | Dimensions: 5 DIN Modules |
|-----------------|--|
| Supply | Input voltage: 180 ÷ 264V AC Output voltage: Rated voltage 30V DC Output current: Rated current 640 mA |



Order Codes

KNX Bridge With IP Interface And Pow-

er Supply KNX + AUX 640ma - KNX

IPSBA03KNX

Secure, E-Lock-IF

SYSTEM COMPONENTS & INTERFACES





Order Codes

PS00D03KNX 640 mA Power Supply



Order Codes

PS00E03KNX 640 mA Power Supply

O eelectron

Power Supply 1280 mA



The power supply unit PS00D04KNX provides the system power necessary for the KNX/EIB bus. The connection to the bus line is via the bus connection block located on the front side. The integrated choke prevents the data telegrams from short-circuiting on the bus line. When the built-in reset button is operated (press the RESET button for at least 20 seconds to reset the KNX Bus), the bus devices are returned to their initial state. For each bus line, at least one power supply unit PS00D04KNX is needed. Up to two power supply units may be attached to a single bus line. The distance between power supply unit PS00D04KNX and any of its bus devices must not exceed 350 m. The power supply unit PS00D04KNX has a voltage and current regulation and is therefore short-circuit proof. Short power failures can be bridged with a backup interval of approximately 200 ms. The power supply unit PS00D04KNX can supply DC 30 V power from an additional pair of terminals.



Multiple-access add-on module

The multiple access add-on module LM00C01KNX, interfacing with eelectron's access control devices, allows to differentiate the actions of different users (up to 32k), relative to a specific element (up to 96) of a common area.

The device can be configured with the ETS® to communicate with the KNX Data Secure protocol.

Moreover, 16 logic blocks (of which 96 alternatives to virtual readers) are available to implement simple expressions with logical or threshold operator or complex expressions with algebraic and conditional operators; It is possible to use predefined algorithms as proportional controls of temperature and humidity or dew point calculation.

| Technical F | eatures | Order Codes | Technical Fe | atures |
|-----------------|--|----------------------|-----------------|---|
| Mechanical data | Dimensions: 4 DIN Modules | PS00D04KNX | Mechanical data | • Dimensions: 1 modules DIN |
| Supply | Input voltage: AC 180 ÷ 264 V, 50 / 60 Hz Output voltage: DC 30 V (SELV) Output current: 1280 mA | 1280 mA Power Supply | Supply | • Via bus: EIB/KNX 21 ÷ 32V E • Max 5 mA |





Order Codes

LM00C01KNX Multiple-access add-on module



Surveillance Module KNX



The LM00B01KNX logic module permits to monitor the status of the devices connected to a BUS line.

It is possible to enable the notification mode of the correct functionality of the device via a communication object.

256 surveillance blocks are available through which 3 basic functions can be activated individually or in different combinations: Alive, Alarm and Warning.

- The "On line" function sends a message on the bus as long as the monitored device is active on the bus.

- The "Alarm" function sends an alarm message when the monitored device does not send any message for a time exceeding the surveillance time.

- The "Warning" function can be used to prompt the monitored device.

A little before the alarm is sent, a reading value is generated on the communication object that must be connected to a readable group object of the monitored device (for ex. temperature, a status).

Moreover, 16 logic blocks are available to implement simple expressions with logical or threshold operator or complex expressions with algebraic and conditional operators; It is possible to use predefined algorithms as proportional controls of temperature and humidity or dew point calculation.

For greater security, it is possible to install two LM00B01KNX logic modules on the same BUS line, configuring them as primary and secondary. When the primary device goes out of service, the secondary takes over control of the line; when the operation of the primary device resumes, the secondary returns to the control status of the primary device only. Device is equipped with KNX communication interface and is intended for installation on DIN rail in LV distribution switchboards.

| Technical F | eatures | Order Codes | |
|-----------------|---|-------------------------|-----------------|
| Mechanical data | Plastic enclosure: PC-GF | LM00B01KNX | Technica |
| | Dimensions: DIN rail / 1 Module Weight: ca. 40 g | Surveillance Module KNX | Mechanical data |
| Supply | Via EIB/KNX cable 21 ÷ 32V DC Max 5 mA | | Supply |
| | | | Lan connection |

INTERFACES

KNX IP Interface KNX Secure INTERFACE

The KNX IP Interface IN00S01IPI is a compact interface used to connect a PC to the KNX network. The connection is made through LAN (IP). Power is supplied via the KNX bus. The IP address can be obtained by a DHCP server or by manual configuration (ETS®) respectively. This device works according to the KNXnet/IP specification using the core, the device management and the tunneling part. The device supports KNX Security which can be enabled in ETS. With its interface functionality (tunneling) KNX security prevents from unauthorized access. The buttons are for diagnostic purposes. The LEDs indicate the operating status and communication errors on the bus.

Technical Features

| Mechanical data | Dimensions: 1 DIN Modules |
|-----------------|--|
| Supply | Via EIB/KNX bus cable: 21 ÷ 32V DC Max 20 mA |
| Lan connection | RJ-45 socket Up to 8 simultaneous tunneling connectio |

IP Router-KNX Secure INTERFACE

With the KNX / IP router, a bidirectional communication among more KNX bus lines is possible through LAN networks. If the device is connected to a PC with an appropriate software (for example, ETS), it can also be used like a programming interface for KNX bus system. The IP address can be dynamically assigned via a DHCP server, or manually configured using ETS parameters. Communications are made in accordance with KNXnet / IP specifications. During the data transfer, it is possible to configure a filter table and keep up to 150 messages in the "buffer" memory.

| Technical Features | | |
|--------------------|--|--|
| | | |
| Mechanical data | Dimensions: 1 DIN Modules | |
| | | |
| Supply | Via ElB/KNX bus cable: 21 ÷ 32V DC Max 20 mA | |
| | | |
| Lan connection | RJ-45 socket Up to 8 simultaneous tunneling connection | |











Order Codes

IN00S01IPI **IP-KNX** Interface KNX Secure







Order Codes

IN00S01RIP Router IP-KNX Interface KNX Secure **INTERFACES**

Line Coupler KNX



The LC00B01KNX KNX line coupler has been made in a compact design. It connects two KNX bus segments (for example, a KNX line with a KNX area). The device has a filter table (8k bytes) and ensures a galvanic isolation between the lines. The coupler supports KNX long frames and is compatible with the ETS® software (ETS 4.2 or higher).

The buttons on the front panel allow disabling the telegram filter for testing purposes. The LEDs indicate operating conditions as well as communication errors on the KNX bus.

| Ł | |
|---------|-------------|
| | |
| 0 | eelectron |
| | - |
| | Mode |
| | • |
| XND | Pass GAs |
| COOBOTK | P/Esc |
| 3 | Pass |
| KN | > CE |

| Technical Fe | eatures | |
|-----------------|--|--|
| Mechanical data | Dimensions: 1 DIN Modules | |
| Supply | Via EIB/KNX bus cable: 21 ÷ 32V DC KNX main line approx. 5 mA KNX sub line approx. 3 mA | |

Order Codes

LC00B01KNX Line Coupler KNX

Weather Station Plus KNX



Measurement and evaluation of weather data: Wind speed, Wind direction, Precipitation, Brightness, Global radiation Twilight, Temperature, Relative air humidity and Air pressure

- Installation on the outside of buildings, preferable in the roof and facade area
- Operation with additional power supply Product characteristics
- Integrated GPS/GLONASS receiver for automated positioning

· Calculation of additional weather data: Absolute air humidity, chill temperature, comfort

- Function for shading control
- Integrated KNX bus coupling unit
- Measurement data acquisition and limit value monitoring
- Software logic modules for linking events
- Integrated heating

USB-KNX INTERFACE



The device enables the KNX bus system to be interfaced to a PC equipped with a port for programming or managing through appropriate software.



| Technical Features | |
|--------------------|--|
| Mechanical data | Dimensions: 1 DIN Modules |
| Supply | Via ElB/KNX bus cable: 21 ÷ 32V DC, max 3 mA USB, consumption: < 15 mA |
| USB Connection | Connector type BMax. cable length: 5 m |

Order Codes

IN00A03USB **USB-KNX** Interface

Technical Features Mechanical data • Dimensions: Ø×H 130×68 mm • Via EIB/KNX bus cable: 21 ÷ 32V DC Supply • Auxiliary power supply: 21 ÷ 32V DC, Current consumption 100 ÷ 400 mA (dependent on the weather)

Degree of protection • IP44





Order Codes

WS00A01KNX Weather Station Plus KNX

ACCESSORIES





It is used for installation in "smart" building applications. Guarantees perfect communication in accordance with specifications established by EIB / KNX, and is suitable for applications with fixed wiring inside channels and under plaster.

| Technical Features | |
|--------------------|--|
| Inner Conductor | Solid bare copper wire |
| Construction | • 1 x 2 x 0,8 or 2 x 2 x 0,8 mm |
| Dielectric | Low smoke zero halogen fire retardant compound (LSZHFRNC) |
| Colours | • Red, black or red, black, yellow, white |
| Outer Jacket | Low smoke zero halogen fire retardant compound (LSZHFRNC) |
| Classified | • CEI 20-11 M1 |
| According to | • IEC 60332-1, IEC 61034-1= IEC 61034-2 |
| Diameter | • 5,20 mm ± 0,20 colour |
| Colour | • Green (RAL 6018) |

Miniature LED Lamps

3V BLUE OR WHITE



Packages of 20 or 60 pcs LED with Blue or White light 3 V wired red/black.



Order Codes

Double-bus cable 2x2x0, 8 coils 100 m

Single bus cable 1x2x0, 8 coils 500 m

CV00A01KNX

CV05A02KNX

Technical Features

Dimension

- 3 mm x 4.3 mm (width and height) and 3.85 mm (radius)
- Current: 20 mA
- Reverse Voltage: 5 V
- Luminous Intensity: 4000 Min Max 9000 mcd

Order Codes

LD00A01ACC Miniature LED Lamps Blue 3 V 20 pcs

LD00A11ACC Miniature LED Lamps White 3 V 20 pcs **KNX** Connector RED / BLACK



BUS Connector Red / Black for EIB / KNX, with direct plug connection. They can be connected up to 4 pairs of wires to a KNX device, it can also be used as a branch terminal.

Technical Features

| Dimension | • (H. x W. x D.) 11.5 x 10 x 10 mm |
|-----------|---|
| Features | Wire 22 to 18 AWG (0.6 - 1 mm) EN detected voltage 100 V Rated current 6 A Stripping length from 5 to 6 mm |

Temperature Probe

INTERNAL/ EXTERNAL

Order Codes

TS01A04ACC Temperature probe 4 pcs

TS01B04ACC External temperature probe 4 pcs





Order Codes

WG00A01ACC KNX Connector Red / Black Box 100 pcs



Condizioni di vendita: https://www.eelectron.com/condizionidivendita.pdf



per ulteriori informazioni, visita www.eelectron.com

© 2024 Eelectron SpA. All Rights Reserved.

© 2024 Eelectron SpA. All Rights Reserved

Soggetto a modifiche senza preavviso

Nonostante ogni sforzo per mantenere l'accuratezza delle informazioni qui elencate, potrebbero esservi errori od omissioni: in relazione ad essi Eelectron SpA declina ogni responsabilità riservandosi il diritto di modificare o aggiornare senza preavviso in qualsiasi momento i contenuti del presente catalogo.

Il marchio eelectron e ogni marchio commerciale registrato da Eelectron SpA citato in questo catalogo sono proprietà esclusiva di Eelectron SpA. Non possono essere utilizzati per nessuno scopo senza l'autorizzazione scritta da parte di Eelectron SpA.

La riproduzione di immagini, grafiche e parti del catalogo è possibile solo previa autorizzazione scritta da parte di Eelectron SpA.

KNX Bluetooth DALD MOTT



Eelectron spa

Via Monteverdi 6 | 20025 Legnano (MI) - Italia

